


10F2

23234 UN

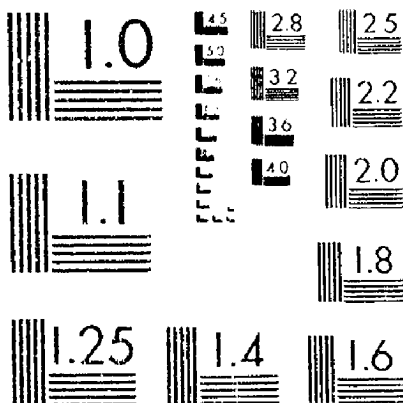

MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

NI

NASA CONTRACTOR REPORT 166186

Determination of Wind Tunnel Constraint
Effects by a Unified Pressure Signature Method

Part 1: Applications to Winged Configurations

(NASA-CR-166186) DETERMINATION OF WIND
TUNNEL CONSTRAINT EFFECTS BY A UNIFIED
PRESSURE SIGNATURE METHOD. PART 1:
APPLICATIONS TO WINGED CONFIGURATIONS. Final
Report, Oct. 1980 - (LOCKHEED-GEORGIA CO.,

N82-23234

UNCLAS

63/05 05847

J.E. Hackett
S. Sampath
C.G. Phillips

Lockheed-Georgia Company

CONTRACT NAS2-9883 (Mod 3)
June 1981



NASA

NASA CONTRACTOR REPORT 166186

Determination of Wind Tunnel Constraint
Effects by a Unified Pressure Signature Method

Part 1: Applications to Winged Configurations

J.E. Hackett
S. Sampath
C.G. Phillips

Lockheed-Georgia
Marietta, Georgia 30060

Prepared for
Ames Research Center
under Contract NAS2-9883(Mod 3)



National Aeronautics and
Space Administration

Ames Research Center
Moffett Field, California 94035

CONTENTS

| | Page |
|---|------|
| LIST OF FIGURES | v |
| LIST OF SYMBOLS | viii |
| SUMMARY | x |
| ACKNOWLEDGEMENTS | xi |
| 1.0 INTRODUCTION | 1 |
| 1.1 Background | 1 |
| 1.2 Some Theoretical Considerations | 4 |
| 1.3 Layout of the Present Report | 6 |
| 2.0 THE GENERALIZED METHOD FOR WALL PRESSURE SIGNATURE ANALYSIS | 7 |
| 2.1 Review | 7 |
| 2.2 Properties of the Influence Matrices and Their Inverses | 7 |
| 2.3 Geometrical Considerations | 8 |
| 2.4 Effects on Measured Signatures, of Sweep, Angle-of-Attack and Model Offset | 10 |
| 2.5 Use of Least-Squares Smoothing | 14 |
| 2.6 Mathematical Summary | 16 |
| 3.0 TEST MODELS, RIGS AND PROCEDURES | 19 |
| 3.1 General Comments | 19 |
| 3.2 The Simple Wing | 19 |
| 3.3 The Unswept and Swept Knee-Blown Flap Models | 19 |
| 3.4 Floor Boundary Layer Control | 20 |
| 3.5 Wall Pressure Instrumentation | 20 |
| 3.6 Tunnel Speed Control | 20 |
| 4.0 USE OF TUNNEL-FLOOR BLC TO SUPPRESS FLOW BREAKDOWN | 22 |
| 4.1 Effects of Tunnel Blockage and Flow Breakdown | 22 |

| | Page |
|--|------|
| 4.2 Flow Measurements Using the Laser Velocimeter | 23 |
| 4.3 Interpretation of wall pressure signatures | 24 |
| 5.0 FORCE AND MOMENT CORRELATIONS | 26 |
| 5.1 Checkout for a Simple Wing | 26 |
| 5.2 Selection of Singularity Geometry and Iteration Procedure | 26 |
| 5.3 Analysis of Angle-of-Attack Corrections | 27 |
| 5.4 Force and Moment Correlations for Straight and Swept- Winged Knee-Blown Jet-Flap Models | 28 |
| 6.0 DISCUSSION | 30 |
| 6.1 Aerodynamics | 30 |
| 6.2 Signature Analysis | 31 |
| 7.0 CONCLUSIONS | 33 |
| 8.0 REFERENCES | 36 |
| APPENDIX 1. PROGRAM DESCRIPTION | 97 |
| APPENDIX 2. PROGRAM LISTING. | 116 |
| APPENDIX 3. EXAMPLES OF SIGNATURE ANALYSIS | 151 |
| APPENDIX 4. LEAST SQUARES APPROACH FOR THE NASA 40' X 80' TUNNEL . . . | 156 |

LIST OF FIGURES

| <u>Figure Number</u> | <u>Title</u> | <u>Page</u> |
|--------------------------|--|-------------|
| 2.1 | Influence matrices for source and vortex arrays | 41 |
| 2.2 | Application of influence matrices | 42 |
| 2.3 | Performance of "MATCH" and iterative methods (6' x 6' normal plate in 16½' x 23½' tunnel) | 43 |
| 2.4 | Tunnel surface pressures for a horseshoe vortex | 44 |
| 2.5 | Effect of combined sweep and angle-of-attack on influence curves for tunnel sidewalls | 45 |
| 2.6 | Effect of combined sweep and angle-of-attack on roof-minus- floor influence curves | 46 |
| 2.7 | Sensitivity of "MATCH" and iterative methods to data scatter ("SAS" car model in the 16½' x 23½' tunnel) | 47 |
| 2.8 | Matrices for a least squares solution | 48 |
| 2.9 | Application of the least-squares approach to "noisy" data ("SAS" car model in the 16½' x 23½' tunnel) | 49 |
| 2.10 | Application of the least-squares approach to a complex signature (knee-blown-flap model, at high- C_D and angle- of-attack, in the 30" x 43" tunnel) | 50 |
| 2.11 | Iterative solution for Equations (3) and (4) | 51 |
| 3.1 | 18-inch semi-span, 12-inch chord half-wing in the 30" x 43" wind tunnel | 52 |
| 3.2 | Basic swept knee-blown flap model in the 30" x 43" test section (View through the LV window from the back platform) | 53 |
| 3.3 | Model, sting and instrumentation layout in the 30" x 43" wind tunnel | 55 |
| 3.4 | Principal dimensions of the unswept knee-blown flap model . . | 56 |
| 3.5 | Principal dimensions of the swept knee-blown flap model . . . | 57 |
| 3.6 | The floor-blowing BLC slot | 58 |
| 3.7 | Wall pressure orifice locations for experiments with the knee-blown flap models | 59 |

| <u>Figure Number</u> | <u>Title</u> | <u>Page</u> |
|--------------------------|---|-------------|
| 4.1 | Implied corrections for "True-q" tests | 60 |
| 4.2 | Use of ground pressures for BLC feedback | 61 |
| 4.3 | Effect of ground-blowing BLC upon lift loss due to floor vortex | 62 |
| 4.4 | Test details for straight-wing KBF runs | 63 |
| 4.5 | Laser velocimeter measurements of tunnel flow breakdown condition, $C_{\mu} = 6.0$ $\alpha = 28^{\circ}$ | 64 |
| 4.6 | Laser velocimeter measurements of tunnel flow breakdown condition, $C_{\mu} = 10$ $\alpha = 20^{\circ}$ | 65 |
| 4.7 | Flow measurements with floor-blowing BLC applied $C_{\mu} = 6.0$ $\alpha = 28^{\circ}$ | 66 |
| 4.8 | Flow measurements with floor-blowing BLC applied $C_{\mu} = 10.0$ $\alpha = 20^{\circ}$ | 67 |
| 4.9 | Effect of ground BLC on floor and sidewall signatures $C_{\mu} = 6.0$ $\alpha = 28^{\circ}$ | 68 |
| 4.10 | Effect of ground BLC on sidewall and roof signatures $C_{\mu} = 6.0$ $\alpha = 28^{\circ}$ | 69 |
| 4.11 | Effect of the second peak on predicted blockage | 70 |
| 4.12 | Effect of ground BLC on typical signatures $C_{\mu} = 10.0$ $\alpha = 20^{\circ}$ | 71 |
| 4.13 | Development of floor vortex with increasing α : $C_{\mu} = 2.0$. | 72 |
| 4.14 | Development of floor vortex with increasing α : $C_{\mu} = 4.0$. | 73 |
| 4.15 | Dimensions of floor separation for $C_{\mu} = 4.0$ | 74 |
| 4.16 | Development of floor vortex in terms of peak pressures | 75 |
| 5.1 | Angle-of-attack corrections for simple wing using the wall pressure signature method | 76 |
| 5.2 | Correction of lift and drag data for the swept, knee- blown, jet-flap model. | |
| | a) Sensitivity to sweep of line singularities | 77 |
| | b) Sensitivity to "cross" effects | 78 |
| | c) Sensitivity to sidewall upwash term. | 79 |

| <u>Figure Number</u> | <u>Title</u> | <u>Page</u> |
|--------------------------|---|-------------|
| 5.3 | Angle-of-attack corrections for the swept, knee-blown, jet-flap model | |
| a) | $C_{\mu} = 0$ and 0.40 | 80 |
| b) | $C_{\mu} = 1.0$ and 2.0 | 81 |
| c) | $C_{\mu} = 4.0$ and 6.0 | 82 |
| 5.4(a) | Basic lift data, straight wing with slats. | 83 |
| 5.4(b) | Basic drag data, straight wing with slat | 84 |
| 5.4(c) | Basic pitching moment data, straight wing with slats | 85 |
| 5.5(a) | Basic lift data, straight wing, no slats | 86 |
| 5.5(b) | Basic drag data, straight wing, no slats | 87 |
| 5.5(c) | Basic pitching moment data, straight wing, no slats | 88 |
| 5.6(a) | Basic lift data, swept wing with slats | 89 |
| 5.6(b) | Basic drag data, swept wing with slats | 90 |
| 5.6(c) | Basic pitching moment data, swept wing with slats | 91 |
| 5.7(a) | Basic lift data, swept wing with tips and full-span slats. . | 92 |
| 5.7(b) | Basic drag data, swept wing with tips and full-span slats. . | 93 |
| 5.7(c) | Basic pitching moment data, swept wing with tips and full-span slats. | 94 |
| 6.1 | Occurrence of 'neutral' points in a wind tunnel cross section. | 95 |
| A1 | Flow chart for wall pressure signature-based tunnel interference program | 99 |
| A3 | Signature analysis for a knee-blow-flap test straight wing with slats. | 152 |

LIST OF SYMBOLS

| | |
|-----------------|--|
| A | Least-Squares Influence Coefficient |
| $A_{R/F}$ | Matrix of Influence Coefficients, (Roof-Floor) |
| A_{CL} | Matrix of Influence Coefficients, for the Determination of Tunnel Center-Line Interference Velocities. |
| B | Tunnel Breadth |
| B | Least Squares Column Vector (Sec. 2.5) |
| b | Vortex span |
| C_L | Lift Coefficient |
| C_D | Drag Coefficient |
| $C_{MC/4}$ | Moment Coefficient about Quarter Chord Point |
| C_u | Knee-blowing Jet Momentum Coefficient for KBF Model |
| D | Drag |
| H | (Fig 4.4) Total Head |
| H | (elsewhere) Tunnel Height |
| L | Lift |
| N | Total Number of Singularities |
| N | Number of Observation Points |
| P_o | Free Stream Total Pressure |
| Q | Source Strength |
| q | Dynamic Pressure |
| U_∞, U_o | Free Stream Velocity |
| u, v, w | Velocity Components |
| v_{ij} | Influence Coefficient. Velocity Induced at j^{th} Observation. Point due to i^{th} Singularity. |
| V_j | Total Velocity Induced at j^{th} Observation Point. |
| V_j | Measured Velocity at j^{th} Observation Point |

| | |
|------------|--|
| x, y, z | Cartesian Co-ordinate System |
| α | Angle of Attack |
| Γ | Vortex Circulation Strength |
| δ_j | Difference Between Measured and Calculated Velocity at j^{th} Observation Point |
| ρ | Density |
| σ_i | Strength of i^{th} Singularity |

Subscripts:

| | |
|-----|----------------|
| G | Implies Ground |
| tot | Implies Total |

Operators:

| | |
|----------|-----------------------------------|
| Δ | Denotes a Difference or Increment |
|----------|-----------------------------------|

Abbreviations:

| | |
|-----|------------------------|
| BLC | Boundary Layer Control |
| CP | Center of Pressure |
| KBF | Knee-Blown-Flap |
| LV | Laser Velocimeter |

Note: Symbols used in Section 2.6 are explained locally.

SUMMARY

A new, fast, non-iterative version of the "Wall Pressure Signature Method" is described and used to determine blockage and angle-of-attack wind tunnel corrections for highly-powered jet-flap models. The correction method is complemented by the application of tangential blowing at the tunnel floor to suppress flow breakdown there, using feedback from measured floor pressures. This tangential blowing technique was substantiated by subsequent flow investigations using an LV.

The basic tests on an unswept, knee-blown, jet flapped wing were supplemented to include the effects of slat-removal, sweep and the addition of unflapped tips. C_{μ} values were varied from 0 to 10 and free-air C_L 's in excess of 18 were measured in some cases. Application of the new methods yielded corrected data which agreed with corresponding large tunnel "free air" results to within the limits of experimental accuracy in almost all cases. A program listing is provided, with sample cases.

The present report is the first of two parts: Part Two describes an extension to include jet-in-crossflow effects. A copy of the present report is retained in the Lockheed-Georgia Company Engineering Report Files. The identifying number is LGB1ER0166.

PRECEDING PAGE BLANK NOT FILMED

ACKNOWLEDGEMENTS

The authors wish to express their sincere thanks to

Sherry Bartley, who prepared the figures;

Shelby Christophers and Louise Ballew, who typed the text;

Doug Lilley, for his help with data handling;

John Malone, for advice on inverse methods;

Bill Stevens, for the initial theoretical work and programming;

Rebecca White, for her help with data plots;

Derek Wilsden, who reviewed the text and who acted as a 'sounding board' on numerous occasions.

1.0 INTRODUCTION

1.1 Background

In any wind tunnel test, the basic requirement is to create a flow field around a test model which properly represents either free air conditions or, on occasion, the condition of flight near the ground. For conventional models, nominal tunnel velocity must be corrected in magnitude and direction to compensate for the presence of the tunnel walls. For V/STOL models these corrections are likely to be large enough to require special correction methods and the further complication arises that separation may be induced on a tunnel surface. If an in-ground condition is to be simulated the relative ground motion must also be considered: in flight, this motion will usually reduce the extent of a ground separation (if present) but will not necessarily eliminate it.

Within the above terms-of-reference, three distinct but related test needs may be identified:

- (a) the need for improved correction methods, particularly for blockage effects, including the effects of highly three dimensional powered flows.
- (b) the need to understand and either correct for or remove the effects of tunnel flow breakdown during tests to determine free air data.
- and (c) The need firstly to understand and then to properly simulate the effects of ground motion during ground effects testing.

References 1 through 10 represent some ten year's work at Lockheed-Georgia on the above questions. As a result of this and the present work, the flow physics is now well understood and practical solutions are almost complete. To place the present work in perspective a review is presented below covering blockage experiments, software development, angle-of-attack correction and ground or tunnel floor separation phenomena as studied at Lockheed-Georgia during the 1970's.

Experiments on Wind Tunnel Blockage

The history of wall-pressure based tunnel blockage correction research at Lockheed is represented chronologically by References 5 through 10, or parts of these.

When conducting an investigation of ground effects on a knee-blown flap model (Ref 2) a substantial static pressure drop was noticed between the test section entry and the tunnel breather slots at the test section exit. The calibrated velocity, at the test section entry, was evidently significantly below the effective value at the model implying that the conventionally calculated model coefficients were too high. An obvious 'fix' was to define a model station reference static pressure equal to the mean of the test section entry and exit values.

This approach was applied to pressure data from new tests on a knee-blown flap model in the 30" x 42" tunnel and comparisons were made with datum tests in the Lockheed 16½' x 23½' tunnel (Ref 5). In the absence of balance data, C_L -values were estimated from pressure integrations. Only a basic, straight winged, slats-on configuration was tested. These pilot studies showed significantly improved C_L correlations, between tunnels, when the new reference static correction procedure was employed.

A fuselage containing a three-component balance and optional, unflapped wing tip extensions were added to the knee-blown flap model for the next test series (Ref 6). Test conducted in the 30" x 42" tunnel and datum tests in the NASA/AAMRDL 7' x 10' tunnel included wake flow as well as balance measurements. With the slats fitted, the flow measurements showed little wake distortion, relative to a corrected mainstream vector, and good force and moment correlations were obtained. However, with the slats removed the drag behavior in the small tunnel was totally different from that in the large tunnel, though the lift performance was comparable. Slats-off flow data were not taken but analysis of the drag data suggested that flow breakdown in the short test section of the small tunnel interacted in some way with the separated main wing flow and caused the jet sheet to separate prematurely from the flap upper surface. In addition to this problem, it was recognized in Reference 6 that the revised reference static method responded primarily to wake blockage and was inherently incapable of responding to solid or separation-bubble-induced blockage.

Reference 7 describes early Lockheed-funded work on what has become known as the 'wall pressure signature method.' As the name indicates, a series of pressures along the test section length is used to characterize the tunnel flow. Analysis of this 'signature' yields not only individual estimates of solid/bubble and wake blockage but also corresponding axial velocity interference increments anywhere in the test section. The feasibility of the approach was established by means of tests on normal flat plates of various sizes tested in the Lockheed 16½' x 23½' tunnel. The data of Reference 7 were analyzed entirely by 'hand' methods, using look-up charts: it was a considerable time before the corresponding computerized version was ready for 'production' use.

From the work of References 6 and 7 it became clear that the 4-foot test section length of the 30" x 42" tunnel was insufficient. The tunnel test section was therefore reworked to 7-foot total length. Rows of permanent wall pressure orifices were added.

Reference 8 closely parallels Reference 6 but describes tests on a swept wing variant of the knee-blown-flap model. The straight winged model was retested, in the longer test section, and the 'drag flip back' anomaly disappeared. The correlations for the straight wing improved and those for the swept wing were good for attached-flow cases. Wall pressure signatures were measured but were not used for correction purposes. Nonetheless, they gave important insight into tunnel interference and tunnel flow breakdown phenomena.

Other, Lockheed IRAD-sponsored, tests at this time included work on spheres of two sizes in two tunnels and on flat plate wings of four sizes tested in the (now) 30" x 43" tunnel. Automation of the wall pressure signature method was completed in 1977 and its usefulness in application to automobile testing in the 16½' x 23½' tunnel was becoming appreciated. However, it could be used only off-line because its operation was somewhat slow.

Reference 9 collects together most of the previous data and analyzes it using the automated program, which it also documents. Data for normal flat plates, spheres, and idealized automobile, flat-plate wings and the unswept knee-blown flap model are all included.

Software Development

The initial objective of the computer program is to locate a source-sink pair, representing solid/bubble blockage and a wake-source, all on the tunnel axis, and determine their strengths so as to provide the best curve fit to the observed wall pressure signatures. This is essentially an inverse problem and the solution must be found iteratively with regard to the source and sink locations. A developed version of the previous look-up charts (Reference 7) is used, in tabular form, during this iteration. Having solved this inverse problem, the determination of tunnel interference effects is straightforward.

The period from 1975 to 1978 saw substantial improvements in program capability with regard to increased robustness and reduced run time. It was found that a good deal of data reviewing is required to reject 'bad' points, to interpret unusually shaped signatures properly and to achieve the best theoretical match to observed data. The earliest program ran about 30-seconds per data point, which is totally unacceptable for on-line use. The Reference 9 program requires about 3-seconds on a minicomputer and is much more robust than the early programs. A practical limit appears to have been reached in development of the method in its iterative form.

Reference 10 describes the most recent Lockheed research on the wall pressure signature method. An alternative approach to the iterative method is introduced in which multiple sources or sinks are employed at fixed positions. This method avoids iteration and a constant influence matrix may be used. A least-squares fit to the wall pressure signature may be achieved, when using the new program, by choosing fewer singularities than pressure data points. The direct method is an order-of-magnitude faster than the best iterative program. It can also accommodate unusually-shaped wall signatures for which the previous method must make approximations.

Angle-of-Attack Corrections

The sensitivity to angle-of-attack correction is either zero or weak in most of the correlations described above. It has been found sufficient to employ the methods of Williams and Butler (Reference 11) for the powered model tests or the classical, Glauert correction as quoted in Reference 12 in other cases. However as is pointed out in Reference 10, the development of a wall pressure signature method for angle-of-attack is desirable to afford consistency with the blockage corrections.

Reference 10 describes initial studies of angle-of-attack correction by the wall pressure signature method. The general feasibility is established and a number of sensitivity studies are described. However, only limited examples are quoted which involve test data.

Ground or Tunnel-Floor Separation

References 1 through 6 deal predominantly with ground simulation in the wind tunnel. It is clear the the most realistic simulation should include the ground motion, using a moving belt or some alternative means of controlling the flow immediately above the tunnel floor. It is shown in Reference 3 that tangential blowing along the ground, from just ahead of the model, may be used successfully to simulate a moving belt. The criterion for blowing quantity, based upon the physics of the flow, is that skin friction at the ground shall be positive or zero everywhere. Reference 6 describes the development of a ground blowing system which employs feedback from ground skin friction sensors to determine the level of tangential blowing.

A blowing rig designed for ground simulation by tangential blowing (e.g. Ref. 4) may also be used to control tunnel flow breakdown. However, there is an important distinction between the two applications. It is shown in Reference 3 that, even with a moving ground, a spanwise vortex may be trapped between the wing and the ground. The appearance of a floor vortex during center-tunnel testing heralds the onset of tunnel flow breakdown and can never be a "correct" flow condition. We shall see later in this report that such a vortex can distort the flow seriously in the vicinity of the model and render the data uncorrectable. When used during center tunnel testing, we shall see that ground blowing should be used to destroy the floor vortex, if it occurs.

1.2 Some Theoretical Considerations

Selection of Flow Model

It is possible, if only in principle, to exploit the non-iterative, matrix approach described above by defining three-dimensional arrays of sources and vortices clustered in the vicinity of the model and its wake and solving for boundary conditions derived from wall pressures. (In the present work, the normal velocity condition is satisfied by using an appropriate image system.) However, such an approach would almost certainly encounter matrix conditioning problems.

The number of unknown source or vortex strengths is reduced greatly if knowledge of the model geometry - location, wing sweep, angle-of-attack etc - is exploited. This relieves the matrix conditioning problem significantly though, as indicated in Reference 10, some difficulties remain. The problem becomes more one of limiting the number of influence matrices which must be held ready for use.

Even after reducing the number of singularities, there are constraints on their geometry which must be recognized. For example, if measured axial velocity at the tunnel wall mid height is used as a boundary condition, the strength of a vortex at mid height can not be determined because it cannot affect the boundary points' axial velocity. Sources Q_1 and Q_2 or vortices Γ_1 and Γ_2 placed at altitudes z_1 and z_2 cannot be resolved separately because the boundary velocity depends only upon $(Q_1 + Q_2)$ and $(\Gamma_1 - \Gamma_2)$ respectively. For this reason the inclusion of a vortex on the centerline or the inclusion of sources or vortices equally spaced above and below the centerline results in a singular influence matrix for mid-wall orifice locations. These considerations suggest some necessary rules for valid singularity arrangements.

Other rules are probably needed to complete a set which is also sufficient: further work is needed to identify these.

Uniqueness of the Interference Flow Field

The constraints above reduce the permissible number of singularities, they restrict their location to the general area of the model and its wake, they introduce some geometric properties related to the model itself and they introduce certain restrictions intended to avoid singular influence matrices. Even within these constraints a considerable number of possible arrangements of singularities remains, particularly with regard to their number and spacing. The details of the configuration selected will affect the singularity strengths but the implications in relation to the calculated interference velocities are not immediately clear.

Experience suggests that the interference flow field may be relatively insensitive to the fine details of the flow model. For example, a study is reported in Reference 10 in which the original source-source-sink, variable geometry formulation of the present problem was set up in non-linear equation form. A range of solutions was found, with widely varying geometry, and an interference velocity profile along the tunnel axis was calculated for each. Though the interference curve certainly was not unique, the spread between the individual solutions was acceptable in engineering terms.

Interpretation of the Interference Flow Field

Having solved the inverse problem, as indicated previously, and having defined interference velocities at locations of interest on the model, what remains is to determine their effects. This subject is discussed in detail in Reference 10. If the maximum benefit is derived from the wall pressure signature method, wind tunnel models may be sufficiently large that interference gradient corrections need to be considered. If the pressure gradients are nearly constant it usually will be possible to use standard gradient correction ("buoyancy") methods. If only surface pressure measurements are to be corrected, a "local mainstream" concept has been found to be effective in correcting for blockage (Ref 10). Beyond these, a method must be found for distributing the forces over the model so that moment corrections, in particular, may be made on the basis of the local conditions which apply to individual model components. Though an experimental approach is a candidate for this, and is used occasionally, a better choice is probably a simple analytical model of the configuration concerned.

Once a high-induced-gradient field has been defined - by whatever method - it is highly desirable to seek out and exploit such flow models as are available for the configuration concerned. A close interface with the "customer" is likely to be very beneficial in this regard.

Impingement Cases for Powered Flows

Even if the vortex which occurs ahead of floor impingement is removed by floor blowing boundary layer control, as described in sub-section 1.1, there may still be sufficient flow distortion to make data correction difficult, if not impossible. However, with the floor vortex removed, there is at least a reasonable chance of defining the interference flow field over the model volume.

The calculation of the interference flow field for an impinging jet includes the determination of the effects of truncation as well as the effects of images. The vortex pair which might represent an impinging jet-in-crossflow bends sharply at the floor. To complete the interference calculation a contribution from the "missing" part of the plume downstream of this, must be added to the image effects corresponding to the section of plume within the tunnel. For flow continuity a further source effect, at the tunnel floor itself, may be needed to provide an appropriate envelope around the impinged jet fluid there.

With the interference flow field defined, a final consideration concerns jet path distortion. To first order, this will be a jet velocity ratio effect which should be adequately accommodated when the corrected mainstream velocity is defined at the model location. As the plume of an impinging jet is likely to be aerodynamically "stiff" the distortion due to gradients between the model and the tunnel floor are likely to be insignificant to within a short distance from impingement.

1.3 Layout of the Present Report

This is the first volume of a two-part report. The present volume deals with conventional, winged configurations and includes computer program listings relevant to the baseline, wall pressure signature program. It should be noted that the baseline program is not restricted to unpowered cases: it will accommodate jet-flapped configurations, for example. Volume II deals with the special topic of jet-in-crossflow modeling, as it affects wall pressure signature analyses.

Section 2 of the present report comprises a description of the new, direct version of the wall pressure signature method. This repeats some Reference 10 material, but this is included for ready reference in connection with the corresponding program listings.

Test hardware for recent knee-blown-flap (KBF) model tests is described in Section 3: jet-in-crossflow hardware details may be found in Volume II. The application of tangential blowing at the tunnel floor in KBF tests is described in Section 4.

Most of Section 5 comprises a presentation of results for several configurations of the knee-blown flap model and shows the correlations between 30" x 43" tunnel corrected data and constraint-free data. The main text of this report is completed by Discussion, Conclusion and References in Sections 6, 7 and 8, respectively. The Appendices include the appropriate program listings, user guides and data tables.

The present report is intended to complement and update Reference 9 which includes more detail on how the basic wall pressure signature method works together with practical details concerning its implementation.

2.0 THE GENERALIZED METHOD FOR WALL PRESSURE SIGNATURE ANALYSIS

2.1 Review

Reference 7 includes the original formulation of the problem of determining wind tunnel blockage via the solution of an inverse problem, starting with measured wall pressures. The general approach is to find the strengths of an array of line sources and sinks, located on the horizontal center plane of the tunnel, which when acting with the appropriate wall image set, produces the observed wall pressures. Having solved this inverse problem, tunnel blockage is determined by considering the image set acting alone. This approach is retained for the present work. An iterative solution which has been the standard approach to date is described, in its most developed form, in Reference 10. The more recent generalized, or matrix solution is also described in Reference 10 and sensitivity studies, to source or vortex span, phase etc. are also described.

The algorithms for influence coefficient calculations were relatively straightforward in the Reference 7 and 10 programs, since only spanwise line sources were involved. However the geometric requirements for swept wing and for jet-in-crossflow models are more demanding and a generalized, skewed, line-singularity algorithm has been prepared. The formulation for sources, horseshoe vortices and doublets and the corresponding algorithms are documented in Reference 14.

In the sub-section which follows, some of the more important characteristics of the matrix approach will be reviewed. Some recent findings concerning the choice of pressure sensing points will be discussed in sub-section 2.3. The effects of model offset and sweep, on measured signatures are reviewed in subsection 2.4 and a least-squares formulation of the basic problem is given in sub-section 2.5. The section concludes with a mathematical description of the generalized method.

2.2 Properties of the Influence Matrices and Their Inverses.

Figure 2.1 shows influence matrices for five-element line-source and five-element horseshoe vortex systems. The source matrices are, in fact, the sum of two others, corresponding to the direct influence of the line sources (an antisymmetric matrix) and the influence of matching, but opposite-sign, sources situated far downstream which are needed to satisfy continuity. Every element in the downstream source matrix equals 0.5. Each of the constituent matrices is singular, but their sum is not. Inspection of the tunnel floor and roof source coefficients (Figure 2.1) shows that, to avoid repeated rows in the influence matrix (which would make it singular) mean values of supersonic velocity increment must be determined from floor and roof orifices having the same x-location. However, sidewall data will generally be used for blockage estimation.

The vortex influence coefficients include vertical velocity components at the tunnel sidewalls, as denoted by arrows in the upper right portion of Figure 2.1. Though these components could, in principle, be measured and used to determine vortex strengths this is less practical than measuring solely static pressures. However, we shall see later that these velocities may influence pressures significantly and hence may represent a lift-dependent

interference upon the blockage signature in some cases. The roof and floor vortex coefficients are of opposite sign, at a given x-location. When solving for lift interference, differences must be taken between supersonic data determined at corresponding roof and floor orifice locations.

Figure 2.2 shows a wall influence matrix for sources (upper left) and a roof/floor influence matrix for vortices (upper right) together with their respective inverses, below them. In both cases the inverses include alternating-sign elements, indicating that the influence matrices are ill-conditioned. Though it has been demonstrated that correct singularity strengths are returned from computer-generated wall pressure signatures, it may be anticipated that, for 'noisy', real data, oscillating singularity strengths will be returned. Application of the method to tunnel data confirms this (see Ref. 10).

To complete a tunnel interference calculation, the source or vortex effects at the tunnel centerline are determined, with the central system removed. This step may be combined with the previous one by multiplying the center-tunnel interference matrix by the inverse matrix already determined. The product matrices are shown in the lower part of Figure 2.2. As before, the elements have alternating signs. Nonetheless, it is found that smooth interference distributions are generally obtained from experimental data.

Figure 2.3 shows results from pilot tests on an interim program, designated "MATCH", which employs the new matrix method. Corresponding results are also shown using the previous iterative program. The wall pressure signature fitted by "MATCH" passes through every experimental point: the iteratively obtained signature must approximate because it has fewer degrees of freedom. Though the source-sink geometries differ considerably, the two methods predict remarkably similar distributions of interference velocity.

2.3 Geometrical Considerations

Singularity Spacing and Location

In early studies, solutions were obtained using arrays like those shown in Figure 2.1. Though good interference prediction was possible (Fig. 2.3), wildly oscillating singularity strengths were obtained which were obviously unrelated to the flow physics. Closing up the arrays and placing them around the model location would, in principle, relieve this problem but in practice did not because the matrix became increasingly ill-conditioned. It is evident from Figure 2.3 that a satisfactory solution is obtained with a reduced number of singularities, provided that their placement recognizes the model and flow geometry appropriately. To satisfy the greater number of boundary conditions a least-squares approach is therefore required.

In addition to the downstream sink, matching each source in the test section matrix, a single, upstream source is also provided, explicitly, to allow the overall signature to shift vertically. This helps to achieve a better match to the experimental upstream asymptote.

Singularity Span

It has been found that the present, generalized method is fairly forgiving with regard to errors in estimating vortex or source span. It is stated in Reference 10 that span-solution within $\pm 0.10B$ will hold errors to an acceptable level. This tolerance is fairly coarse and should not be too difficult to attain in practice. An exception, found recently, occurs when wall signatures measured in the tunnel corners are employed. These locations are significantly more span-sensitive than the central ones.

Wall Pressure Orifice Location - Peripheral Direction

Both theoretical and practical considerations arise in selecting the peripheral locations for wall pressure orifice rows. Figure 2.4 shows theoretical wall pressures, as a function of peripheral location in the bound vortex plane and far downstream of a horseshoe vortex in a wind tunnel. As expected, center-roof and center-floor locations give the largest pressure signals due to lift and so are good candidates, from a theoretical standpoint, for upwash interference predictions. The tunnel corner locations, 5 and 13, are much less sensitive*. While roof locations are usually very practical, there may be difficulties with floor orifices. In large tunnels there is the obvious problem of foot traffic but in all tunnels powered models may involve jets or jet sheets which impinge on the tunnel floor. Even if tunnel floor separation is controlled (see Section 4), jet-impingement may compromise the floor pressure signature.

Wall Pressure Orifice Location - Axial Direction

As indicated in Reference 9, Section 4, a test section length of about 1.5 times tunnel width is desirable to obtain adequate asymptotes to the pressure signatures. Orifice spacing should be smallest opposite to the model and its immediate wake and may increase towards the test section ends where pressure gradients are less.

A generous number of orifices should be provided on the floor at and ahead of likely jet impingement locations, for monitoring ground boundary layer control. In jet-impingement situations, only the forward part of a floor-orifice row may be usable for tunnel interference estimation. In other situations a less dense selection from the whole row will be useful.

Vortex-Induced Upwash Effects at the Tunnel Sidewall

In broad terms, floor and roof orifice rows may be thought of as responsible for sensing vortex-induced flows and thereby providing data for upwash interference corrections. The sidewall orifices are used for estimation of blockage corrections.

Far downstream of the bound vortex, Figure 2.4 shows that upwash induced by the trailing vortex systems can have a significant effect upon sidewall pressures. This could affect the downstream asymptote of the sidewall pressure signature and cause an apparent increase in wake blockage. However the implicit assumption of Figure 2.4, that the trailing vortex remains horizontal, must be reviewed before any legitimate comment can be made regarding corrections for such cross flow effects.

*Note, however, that 13 becomes the proper location for the "sidewall" row in ground-effect tests. It is also needed for semi-span model tests.

In Reference 13, vortex roll-up calculations are described for wings situated in tunnels of various relative sizes and shapes. Though the central vortex sheet deflected significantly in some cases, the vortex centers drifted downwards very little. A more extreme, experimental result is presented in Figure 5.2 of Reference 8 concerning flow measurements behind a partial-span jet-flapped model. In this case the tip vortex path was horizontal and the flap vortex moved down significantly only at high C_{μ} . On this basis, it appears reasonable to assume that the trailing system remains essentially horizontal and to consider correcting sidewall pressure signatures for trailing vortex-induced upwash. Since there is no corresponding source effect on floor/roof increments due to lift, for centrally mounted models, it is possible to analyze these first and then correct the wall signature for vortex-induced crossflow, prior to setting up the blockage analysis. No iteration is required and the lift and blockage problems remain essentially uncoupled for unswept configurations.

2.4 Effects, on Measured Signatures, of Sweep, Angle-of-Attack and Model Offset

At zero angle of attack the addition of sweep to the source and vortex lines only affects the shapes of the velocity distributions at the tunnel surface and there are no "cross" effects such as vortex-induced apparent blockage or source-induced apparent lift. However, on pitching the swept system, these effects appear and must be considered. To interpret them, a relationship must be established between Q/BH and Γ/\sqrt{BH} , the respective normalization velocities for source and vortex-induced effects.

We may find the ratio of total drag to total lift for a line-source, line-vortex system as follows:

$$\text{Lift} = \rho U_{\infty} \Gamma b \text{ where } b \text{ is vortex span}$$

$$\text{Induced Drag} = \frac{\pi}{8} \rho \Gamma^2$$

$$\text{Profile Drag} = \rho U_{\infty} Q$$

$$\text{Thus } \frac{D_{\text{tot}}}{L} = \frac{\frac{\pi}{8} \rho \Gamma^2 + \rho U_{\infty} Q}{\rho U_{\infty} \Gamma b} = \frac{\pi}{8} \frac{\Gamma}{U_{\infty} b} + \frac{Q}{\Gamma b} \quad 2.1$$

At $(L/D)_{\text{MAX}}$ induced and profile contributions are equal so

$$\left(\frac{D}{L} \right)_{\text{MIN}} = \frac{\pi}{4} \frac{\Gamma}{U_{\infty} b} = \frac{2Q}{\Gamma b}$$

$$\text{Thus } \frac{2Q}{\Gamma b} = \left(\frac{D}{L} \right)_{\text{MIN}} \quad 2.2$$

This permits us to interpret the source-strength, vortex strength relationship in terms of $(L/D)_{MAX}$. After some algebra, we obtain

$$\frac{Q}{\Gamma \sqrt{BH}} = \frac{1}{2} \frac{\left(\frac{b}{B}\right) \sqrt{B/H}}{(L/D)_{MAX}} \quad 2.3$$

For the basic, knee-blown flap model, tested in the 30" x 43" tunnel, $b/B = 0.465$, $B/H = 1.433$

$$\text{so that } \frac{Q}{\Gamma \sqrt{BH}} = \frac{1}{2} \frac{.4651 \times 1.1972}{(L/D)_{MAX}} = \frac{.2784}{(L/D)_{MAX}}$$

$$= .0928 \text{ for } (L/D)_{MAX} = 3$$

$$= .0398 \text{ for } (L/D)_{MAX} = 7$$

2.4

In a typical test case, for the knee blown flap model at $C_\mu = 2$ and low angle-of-attack, it was found that

$$\text{total } Q/U_\infty BH = 0.0338$$

$$\text{and total } \Gamma/U_\infty \sqrt{BH} = 0.5527$$

$$\text{so that } Q/\Gamma \sqrt{BH} = 0.0612$$

which is within the range in Equation 2.4.

Effects of Sweep and Angle-of-Attack on Wall Signatures

To demonstrate these effects, an example has been selected which is based upon the geometry of the swept, knee-blown flap model in the no-tips configuration. Effects at the tunnel wall are shown in Figure 2.5. Sweep and angle-of-attack effects will be discussed first.

Figure 2.5(a) shows that adding sweep to the line-source system shifts the axial velocity signature downstream. This is expected, since the same value of root (X/B) is used. The shift is insensitive to angle-of-attack, which is a welcome feature.

Vortex-induced axial velocities at the sidewall (Figure 2.5(b)) are entirely dependent upon angle-of-attack. For typical relative strength values (Equation 2.4) it is apparent that peak "cross"-induced velocities at high angle-of-attack may be comparable with the direct, source-induced velocities. This probably explains the over-corrections for blockage noted in Reference 9 for swept-wings.

Vortex-induced upwash at the sidewall (Figure 2.5(c)) is comparable, in normalized units, with the source induced horizontal velocities (Figure 2.5(a)) - as might be expected. It is appropriate to relate the upwash to the mainstream velocity: this may be accomplished via the lift parameter CL_{hb} (i.e. lift coefficient normalized on model span times tunnel half-height, in the present case). As a CL_{hb} value of 2.0, which corresponds to incipient tunnel flow breakdown (see Reference 8) the maximum value in Figure 2.5(c) of 0.60 represents an upwash equal to about 25% of mainstream. When added vectorially to a unit mainstream, an increase of only about 3% occurs in the total vector. This would increase somewhat at the higher CL_{hb} values permissible when ground-blowing is used; correction for the effect on blockage is probably desirable at this point.

Figure 2.5(d) shows that source-induced upwash at the sidewall location is an order-of-magnitude smaller than the source-induced axial velocity (Figure 2.5(a)). When combined vectorially with the total axial velocity the effects of source-induced upwash will be negligible.

Effects, at the Sidewall, of Change to Model Pivot Location

Curves are included in Figure 2.5 which show the effect of changing from the standard, mid-semi-span α -center to one at the wing root. The latter was used for swept KBF model tests. At 25-degrees angle-of-attack, this places the entire model approximately 7½% nearer to the tunnel floor. In most of the cases in Figure 2.5, the effects of this change are small. For Figure 2.5(d) this is also true because the overall effects are small (see above). However the effect on vortex-induced horizontal velocity is noticeable and it is apparent that offset effects must be included when calculating this correction to the blockage signature. This feature could be troublesome because it is angle-of-attack dependent.

Effects on Roof-Minus-Floor Signature

Figure 2.6(a) shows that the sum of the roof supervelocity and the floor countervelocity, induced by the vortex system, is substantial. Sweep reduces the peak velocity differences ($u_R - u_F$). It is found that the swept vortex curve, at zero angle-of-attack, is essentially unchanged by adding 25-degrees of incidence. The pivot location is consequently immaterial.

Source "cross" effects, on the "lifting" (roof-minus-floor) signature (Figure 2.6(b)) are small when relative vortex/source strength is considered. The fact that the forward pivot case produces less "cross" effect is, at first sight, surprising. This arises because the tunnel roof and floor centerlines are most affected by the central region of the source system, which remains on the tunnel axis for the forward pivot, but which moves towards the roof, with increase in α , for the mid semi-span pivot.

Ground Effects Testing

For in-ground-effect testing, either the tunnel floor ("ground") or the first ground image may be regarded as part of the model under test. The true "center-sidewall" orifice row is now situated at the foot of the tunnel sidewall and, strictly speaking, the blockage sensing orifice row should be located here. The roof orifice row remains correctly located but, in impingement-free cases, the tunnel floor row senses pressures which correspond to the with-blockage double-tunnel centerline velocity distribution.

Though it would be possible to set up the necessary computation schemes on the above, somewhat idealistic basis, it is more practical to consider the in-ground configuration as a below-center test when recovering source/sink and vortex strengths from the measured pressure signatures. In the second-stage analysis, interference velocities are then calculated at the tunnel floor location, rather than at the true tunnel centerline. Both the in-tunnel vortex/source arrays and their first ground images are omitted when calculating blockage and upwash interference.

Offset Models

Sometimes, the need arises to conduct a "center-tunnel" test with the model displaced vertically from the tunnel centerline. One reason for doing this would be to increase 'ground' clearance so as to reduce the severity of impingement problems for powered models. Ground-effects testing would, of course, involve below-center models. An orifice row situated at mid-sidewall "sees" not only the desired blockage effect associated with (for example) an above-center model but also a bound-vortex-induced counterflow which, wrongly interpreted, would appear as a negative solid blockage component. Distortion of the tunnel roof and floor signatures would also occur because of offset effects for both vortex and source systems.

A swept-wing model at angle-of-attack has several similarities to the off-center model. The front of the model, situated above-center, has some of the properties just described while the tips, below center, yield increments of opposite sign and shifted aft. The net effects are illustrated in Figures 2.5 and 2.6.

2.5 Use of Least-Squares Smoothing

Though the results of the pilot study (Figure 2.3) were encouraging, doubts remained about the response of the alternating inverse elements (Figure 2.2) to severe data scatter. Figure 2.7 explores this problem. A single point on a smooth, 'standard' wall pressure signature, designated 'A' in Figure 2.7(a), was perturbed upward and downward as indicated at 'B' and 'C'. Though the interference results from case A agreed quite well with those derived via the older, iterative method (Figure 2.7(c)), the consequence of perturbations 'B' and 'C' were serious (see Figure 2.7(b)). This provided strong motivation towards a least-squares approach.

Derivation of Least-Squares Equations

We define v_{ij} as the velocity induced at the j th observation point by the i th singularity and its image system in the tunnel walls. Due to the complete set of N singularities the total velocity induced at the j th point is given by

$$V_j = \sum_{i=1}^N v_{ij} \sigma_i$$

where σ_i are the required individual singularity strengths. If the corresponding measured velocity V_j differs from the calculated value V_j by a residual amount δ_j we may write

$$\delta_j = |V_j - V_j|$$

or

$$\delta_j = \left| V_j - \sum_{i=1}^N v_{ij} \sigma_i \right|$$

The objective of the least squares approach is to minimize the net area between the V_j and the V_j curves as determined at the N observation points. To do this we minimize

$$\sum_{j=1}^N \delta_j^2$$

i.e minimize

$$\sum_{j=1}^N \delta_j^2 = \sum_{j=1}^N \left[V_j - \sum_{i=1}^N v_{ij} \sigma_i \right]^2 \quad (2.1)$$

To minimize this sum for a particular member k of the singularity set N , differentiate (2.1) with respect to σ_k and equate to zero. Thus:

$$\frac{\partial}{\partial \sigma_k} \left[\sum_{j=1}^N \left[V_j - \sum_{i=1}^N v_{ij} \sigma_i \right]^2 \right] = 0$$

or

$$\sum_{j=1}^N 2 \left[V_j - \sum_{i=1}^N v_{ij} \sigma_i \right] (-v_{kj} \cdot 1) = 0$$

which leads to

$$\sum_{i=1}^N \sigma_i \sum_{j=1}^N v_{ij} v_{kj} = \sum_{j=1}^N V_j v_{kj} \quad (2.2)$$

for

$$1 \leq k \leq N$$

The previous $N \times N$ equation set used to obtain an exact match at every observation point j is now replaced by an $N \times N$ set. N , the number of singularities, may be greater than, equal to or (more usually) less than N , the number of observation points. The case $N = N$ is not equivalent to the "MATCH" procedure described previously because the theoretical curve is fitted to the experimental data in a least-squares sense. On writing equation (2.2) in the form

$$[A_{ik}] [\sigma_i] = [B_k]$$

we notice that the elements of A_{ik} no longer can be identified simply as influence coefficients. The B_k elements are no longer simply observed velocity increments at k but are now weighted sums of all N increments.

Figure 2.8 is the least-squares equivalent of Figure 2.2, which generates an exact match. It is evident that the least-squares process

has caused the upper source-sink matrix to become symmetrical about the leading diagonal and the largest element is now only 16-times the smallest, rather than almost 300-times. However the 'chequerboard' plus and minus pattern in the inverse matrix (center table) still remains. The lowest matrices, used to obtain centerline interference directly from wall velocity increments, do have a changed structure, however. It may be seen that, rather than the previous 'chequerboard' plus-minus structure (Figure 2.2), signs now alternate by column. However, the significance of this must be appraised via studies of some typical cases.

Examples of the Least-Squares Approach

Figure 2.9 repeats the example shown in Figure 2.7, which demonstrated the sensitivity of the 'MATCH' approach to data scatter, but applies the above, least-squares solution to it. It is evident that the previous sensitivity to "noise" in the data has been largely eliminated.

Figure 2.10 is an example of a complex, double-peaked wall pressure signature, measured under tunnel flow breakdown conditions with no tunnel boundary layer control applied. Though the example is somewhat artificial for this reason, it shows that the restriction of the previous, iterative method to simple, single-peaked pressure signatures have been removed. This flexibility, the data smoothing capability and the reduction of matrix size afforded by the least-squares approach represent a significant advance over the previous approaches.

2.6 Mathematical Summary

Having reviewed the physics of vortex and source variables in the previous sections, we are in a position to set up the equations from which source and vortex strengths may be obtained. In the interests of clarity, these will be set up as direct influence rather than least-squares equations.

Notation

| | |
|--------------|---|
| Subscript | i is the index for the source or vortex. j is the index for the sensing point. |
| Summations | I_Q is the number of source variables, equal to the number of wall X-locations. I_Γ is the number of vortex variables, equal to the number of roof/floor X-locations. |
| Superscripts | R Roof F Floor RF Roof value - Floor value W Sidewall |
| U,V,W | "Direct" influence coefficients, due to unit singularity i.e. due to Γ for rod/floor sensing points and due to Q for wall points. |
| u,v,w | "cross" influence coefficients including both axial and normal-to-mainstream effects. |
| C_p | Measured static pressure coefficient |

Influence Equations

Equating measured and theoretical roof-minus-floor axial velocity components, we obtain

$$U_{\infty} (\sqrt{1 - c_{p_j}^R} - \sqrt{1 - c_{p_j}^F}) = \sum_{i=1}^{I_{\Gamma}} \underset{\substack{\uparrow \\ \text{Fig 2.6(a)}}}{u_{ij}^{RF}} \Gamma_i + \sum_{i=1}^{I_Q} \underset{\substack{\uparrow \\ \text{Fig 2.6(b)}}}{u_{ij}^{RF}} Q_i \quad (1)$$

Equating measured and theoretical sidewall pressure coefficients taken as the mean of the two sides, we obtain:

$$U_{\infty}^2 c_{p_j}^w = U_{\infty}^2 - \left[\left(\sum_{i=1}^{I_Q} \underset{\substack{\uparrow \\ \text{Fig 2.5(a)}}}{u_{ij}^w} Q_i + \sum_{i=1}^{I_{\Gamma}} \underset{\substack{\uparrow \\ \text{Fig 2.5(b)}}}{u_{ij}^w} \Gamma_i \right)^2 + \left(\sum_{i=1}^{I_{\Gamma}} \underset{\substack{\uparrow \\ \text{Fig 2.5(c)}}}{w_{ij}} \Gamma_i \right)^2 + \left(\sum_{i=1}^{I_Q} \underset{\substack{\uparrow \\ \text{Fig 2.5(d)}}}{w_{ij}} Q_i \right)^2 \right] \quad (2)$$

We note that equations (1) and (2), which will be needed to find Γ_i and Q_i are coupled and, because of terms four and five of Equation (2), nonlinear. However, we saw previously (Figure 2.5(d) and related discussions) that the fifth term is very small. Dropping this term makes (2) linear in Q_i and permits us to write (1) and (2) as:

$$\Gamma_i = \left[u_{ij}^{RF} \right]^{-1} \left[U_{\infty} (\sqrt{1 - c_{p_j}^R} - \sqrt{1 - c_{p_j}^F}) - \sum_{i=1}^{I_Q} u_{ij}^{RF} Q_i \right] \quad (3)$$

$$= \left[u_{ij}^{RF} \right]^{-1} \left[T_1 + T_2 \right] \quad (3a)$$

and

$$Q_i = \left[u_{ij}^w \right]^{-1} \left[\left\{ U_{\infty}^2 (1 - c_{p_j}^w) - \left(\sum_{i=1}^{I_{\Gamma}} w_{ij}^w \Gamma_i \right)^2 \right\}^{\frac{1}{2}} - \sum_{i=1}^{I_{\Gamma}} u_{ij}^w \Gamma_i \right] \quad (4)$$

$$= \left[u_{ij}^w \right]^{-1} \left[\left\{ T_3 + T_4 \right\}^{\frac{1}{2}} + T_5 \right] \quad (4a)$$

If the w_{ij}^w term is also negligible, as for small span or low lift cases, (3) and (4) may be combined as

$$\begin{bmatrix} \Gamma_i \\ Q_i \end{bmatrix} = \begin{bmatrix} U_{ij}^{RF} & U_{ij}^{RF} \\ U_{ij}^W & U_{ij}^W \end{bmatrix}^{-1} \begin{bmatrix} U_\infty (\sqrt{1-C_{p_j}^R} - \sqrt{1-C_{p_j}^F}) \\ U_\infty \sqrt{1-C_{p_j}^W} \end{bmatrix} \quad (5)$$

Solution of Influence Equations

For the general, large Γ , case the four sub influence matrices U_{ij}^{RF} , U_{ij}^{RF} , U_{ij}^W and U_{ij}^W and the upwash matrix W_{ij}^W are required. The form of equation (5) is less useful than it appears, not only because it lacks the W_{ij}^W correction but also because data is taken from two distinct populations (the roof/floor and sidewall signatures) which violates an underlying assumption of least-squares theory. For these reasons an iterative scheme has been adopted. This is illustrated in Figure 2.11. For convenience of layout the pressure terms, which are dominant, are shown last in the equations given in the figure.

3.0 TEST MODELS, RIGS AND PROCEDURES

3.1 General Comments

Many of the tests which will be described are essentially repeats of earlier tests (Reference 8) with augmented wall pressure instrumentation and, in appropriate cases, floor blowing to suppress tunnel flow breakdown. Since detailed descriptions of the models concerned have been given previously, particularly in Reference 8, only the main dimensions and details of any relevant changes will be presented here.

The models and rigs to be described comprise a simple, semi-span wing (subsection 3.2), the unswept and swept knee-blown-flap models (subsection 3.3) and wind tunnel instrumentation. All tests were conducted in the 30" x 43" low speed wind tunnel (the "MTF") at Lockheed-Georgia. The tests on the simple wing were conducted as part of an in-house, pilot program on upwash interference determination by the wall pressure signature method. Selected results are included in the present report for illustrative purposes.

3.2 The Simple Wing

Figure 3.1 shows a floor-mounted semi-span wing having a whole-wing aspect ratio of 3.0. It has an NACA0012 section and body-of-revolution tips. At the quarter-chord location, a 1-inch diameter bar extends downward through a clearance hole in the floor and attaches to a 3-component platform balance via a turntable which is used to set angle-of-attack. The bar may be replaced by a cylindrical balance which adds wing normal force, normal bending and end load to the lift drag and pitching moment measured by the platform balance. There is a clearance of approximately 0.10" between the wing root and the tunnel floor. The wing root is immersed in the tunnel floor boundary layer which is uncontrolled. Nonetheless, checks between data from the present wing and established finite wing theory show minimal performance degradation due to wing root effect.

The photograph of Figure 3.1 was taken through a new, laser velocimeter window which now comprises the back wall of the 30" x 43" test section. Part of the laser velocimeter may be seen at the right.

3.3 The Unswept and Swept Knee-Blown-Flap Models

Figure 3.2 was also taken through the new back window/wall of the test section. Though the swept knee-blown-flap model is the object of the photograph, a good view of the sting, model air supply, tunnel wall pressure orifice strips and the floor blowing slot are also obtained. Though the sting appears quite massive in this view, it should be noted that it is only about 2-inches wide. Most of it disappears into the floor at high angle-of-attack, as shown in Figure 3.3.

Figures 3.4 and 3.5 show the principal dimensions of the unswept and 25-degrees-swept knee blown flap models. For both models the tips and the slats are removable. The flaps are integral with the model, however and have upper surface angles of 76- and 60-degrees to the wing reference line respectively for the unswept- and swept-wing models. Further dimensional and sectional details are given in TABLE I.

3.4 Floor Boundary Layer Control

The boundary layer control rig used for ground blowing in previous tests (References 3, 6 and 8) was modified for the present test series by providing the capability to control three spanwise slot segments independently. Separate controls were provided for a central 8-inch span slot and two 6-inch segments to each side of this, for a 20-inch total, equal to the powered span as recommended in Reference 8. (Previous tests employed a 30-inch span slot). The change in supply arrangements made it necessary to revise the blowing slot detail to the form indicated in Figure 3.6. The slots had been situated above the middle of each plenum in earlier tests. Spacers were used at regular spanwise intervals to maintain the 0.067-inch slot height. More were required than previously because of a change from stainless steel to aluminum plenum covers.

Slot calibration procedures were as documented in Reference 3. As before, blowing rate was monitored using plenum static pressure taps.

3.5 Wall Pressure Instrumentation

Figure 3.7 shows details of wall pressure orifice locations used for tests on the knee-blown flap models. It should be noted that, for these tests, rows 3 and 5 were located on the upper and lower side walls and not on the roof and floor as shown in Figure 3.2. The orifice strips were moved after completion of the main tests to accommodate the laser velocimeter window.

Previous instrumentation comprised the sidewall orifice rows, 2 and 4 and the floor rows, 7 and 8. The latter rows were augmented for the present tests to give better resolution for identifying the ground vortex and hence flow breakdown. Rows 1, 3 and 5, in the tunnel corners, are new. Rows 1, 3, 5, 6 and the aft parts of 7 and 8 were made from aluminum strips, as may be seen in Figure 3.2. This, newer arrangement is preferable to orifices installed directly in the tunnel walls. General comments about pressure orifices, their location and their use may be found in Section 4 of Reference 9.

3.6 Tunnel Speed Control

The desirability of running at "corrected-q" during powered model tests is well known. In previous tests in the present series (References 6 and 8) this was achieved by sensing wall pressures upstream and downstream of the model at suitable locations and using a voltage divider network (Figure 3.5 of Reference 6) to interpolate for an effective pressure at the model location. Though this approach was quite successful, the fact that it relies upon only two pressures, rather than a whole pressure signature, is an obvious weakness. A specific shortcoming is that solid or separation bubble-induced blockage is likely to be underestimated.

For the present tests, the matrix method for blockage was available in time to permit on-line, whole-signature analysis to be used for speed control. A combined inverse and centerline interference matrix (similar to Figure 2.2, lower part) was applied to supersonic data derived from the sidewall orifice rows. Tunnel 'q' and thereby C_u was determined at the model using the on-line

data reduction program and the tunnel speed control was adjusted until the desired C_D was obtained. At the time of testing, no swept-bound vortex capability had been developed, so a straight wing matrix was used for the swept wing tests.

4.0 USE OF TUNNEL-FLOOR BLC TO SUPPRESS FLOW BREAKDOWN

4.1 Effects of Tunnel Blockage and Flow Breakdown.

The major problems confronting the test engineer in a powered model test have been, in order of decreasing importance: the difficulty in running 'whole' C_u 's, the related difficulty in correcting forces for blockage effects on 'q', the difficulty in recognizing when flow breakdown effects have become excessive, the impossibility of correcting for them and, finally the problem of angle-of-attack correction with curved, powered wakes present.

It is believed that the studies described below represent the first successful attempt to solve the overall problem and identify the specific contributions, to model forces, attributable to the various effects mentioned above. The general approach will be to start with uncorrected lift data for the unswept knee-blown flap model, at high C_u , and illustrate the effects of first correcting for blockage and then applying floor blc to suppress tunnel flow breakdown.

Blockage and Angle-of-Attack Corrections

Figure 4.1 shows $C_L \sim \alpha$ curves measured using on-line blockage corrections, as described in Section 3, at 'whole' C_u values of 4.0 and 10.0. For comparison, 'free air' curves are included (broken lines) which represent data measured in the 7' x 10' tunnel at NASA-Ames. The crosses in Figure 4.1 show C_L -values which employ nominal tunnel-q and uncorrected α -values. Since corrected C_L is held constant, uncorrected C_u values vary with α and are greater than the set values.

The circles represent data corrected for blockage, by the matrix method and for angle-of-attack, by the Williams and Butler method (see References 11 and 6 - section 5). We shall see in Section 5 that use of pressure signatures to determine angle-of-attack correction procedures almost identical results in many cases. Chained lines in Figure 4.1 connect corresponding uncorrected (crosses) and corrected data points. It is evident that although corrections are reasonably successful at lower angles-of-attack and C_u -values, significant errors remain at high α 's.

Use of Tunnel-Floor Blowing

The first tests on the unswept knee-blown flap model in the present series were used to develop ground-blowing strategy, recognizing that, in distinction to previous tests, the objective is to remove the ground vortex entirely, if possible. For the previous, ground-effect tests the objective was to establish a zero-skin friction condition at the ground.

Several candidate criteria were considered for determining the tunnel-floor BLC setting. However, it rapidly became apparent that the best procedure, was to eliminate entirely the negative pressures upstream of the jet impingement, as illustrated in Figure 4.2. Line printer symbol plots were made routinely of the center-floor static pressure signature and blowing was increased until the suction peak disappeared. No attempt was made to prevent jet impingement. At this point, no force correlations had been made and no flow field measurements had been attempted.

Figure 4.3 shows that the use of floor-blowing to suppress flow breakdown was remarkably successful in removing the residual errors in the Figure 4.1 lift curves. The errors in the previous blockage and incidence corrected data (circles), were virtually eliminated when floor-blowing was applied (triangles). Only for the last two points at $C_{\mu} = 10$ was floor-blowing not fully effective: for these the limit of blowing capability evidently had been reached.

Figure 4.3 also demonstrates the significance of the distinction between ground boundary conditions appropriate to ground-effects as opposed to center-tunnel testing. The moving-ground points (pluses in Figure 4.3) give the correct result for a ground-effects case. It is evident that, for this case, a floor vortex should be present, rolling just above the moving ground. Because of this, some lift degradation would occur, relative to the corresponding free air case, in flight near the ground.

Magnitudes of correction and ground blowing quantities

Figure 4.4 shows typical blockage corrections, angle-of-attack corrections and ground-blowing C_{μ} values as a function of angle-of-attack at typical model C_{μ} values.

In the most extreme case, the tunnel-q setting was only 65% of the q experienced by the model. Angle-of-attack corrections appear to be less sensitive to C_{μ} and peak at about 4-degrees. Some scatter is evident in the ground-blowing C_{μ} settings but the general trends are clear. Though values of the order of 0.6, for the $C_{\mu} = 10$ case, seem high they are a small fraction of the corresponding model blowing momentum coefficients. The blowing pressure ratio scale, to the right of the ground C_{μ} plot in Figure 4.4 does not apply to the $C_{\mu} = 10$ case because this was obtained via a reduction in tunnel-q at constant model mass flow.

4.2 Flow Measurements Using the Laser Velocimeter

At the end of the planned test series on the knee-blown flap models, tunnel modifications were made to install the large window in the back wall of the test section. The laser velocimeter was then installed, in preparation for another test. The opportunity was taken to investigate the flow breakdown phenomena just described by making LV flow traverses near to the model center plane. To reduce "shadowing", the straight-winged model was reinstalled.

Figures 4.5 and 4.6 provide vivid evidence of flow breakdown, ahead of the model, at extreme model C_{μ} 's and angles of attack. These are fixed-floor cases with no blc applied. It will be noted that the incident flow angles, just ahead of the model are quite low in Figure 4.5 and 4.6. Figures 4.7 and 4.8 show the same model conditions with blowing applied at the tunnel floor; The floor vortex has been pushed back almost to the impingement point in both cases and it's size has been reduced markedly. Just ahead of the model, the incident flow angles are much greater and the flow vectors are longer. These changes are consistent with the lift increases observed when floor blowing was applied.

The data of Figures 4.5 through 4.8 confirm the choice of the criterion, discussed previously, of increasing floor blowing until suctions below the floor vortex vanish.

4.3 Interpretation of Wall Pressure Signatures

Wall supervelocity data, derived from pressure signatures for the previous $C_D = 6.0$, $\alpha = 28^\circ$ case, are shown in Figures 4.9 and 4.10. With no floor blowing (solid points) the floor vortex peak is readily identifiable in rows 7 and 5 and may contribute to the row 2 and 4 (i.e. sidewall) peaks. However, it appears that row 3 is not affected: its peak is too far forward to be vortex-related.

On applying blowing through the 20-inch slot (+ symbols), the suction peak disappears entirely at the center floor row 7 (by definition), but is not entirely removed at row 5, the lower sidewall, where there is no blowing to suppress it. It is also very likely that the second peak in rows 2 and 4 also marks the path of the "floor" vortex in the 20" blown-floor case.

Data with the slot-width reduced to 8 inches (triangles) shows that this is less effective than the standard, 20-inch slot. This is confirmed by force measurements.

Effects on Tunnel Corrections

It is disturbing that, under high- C_D , high- α conditions, the main suction peak measured at the sidewalls (rows 2 and 4) may include a significant component caused by the passage of the floor vortex across the tunnel sidewall orifice row. However, the application of floor blowing shifts the vortex aft leaving what is probably the correct, solid/bubble-blockage induced first peak. Nonetheless, the wall pressure signature input to the tunnel blockage correction program still includes a second peak which is directly induced by a vortex, rather than being a true reflection of tunnel blockage.

Figure 4.11, taken from Reference 10, explores the effect of a dominant second peak upon tunnel centerline blockage interference. The experimental case (circles) is compared with an idealized case (triangles) with the second peak removed. As might be expected, there are significant changes in interference opposite to the second peak itself. However, the effect of the peak on the interference at the model location is surprisingly small.

Another effect of floor blowing, indicated to some degree in the row 3 data of Figure 4.10, is a general reduction in blockage interference. This is especially noticeable on applying BLC to the $C_D = 10$ case illustrated in Figure 4.12. In this case, it is speculated that, with no BLC applied, the separation streamline, from ahead of the floor vortex, rises to perhaps half the model altitude at its crest. Though the pressure signature blockage prediction method probably responds to this with appropriately located corrections of the proper sign, the total flow is far too distorted for any such corrections to be taken seriously. It is obviously better to get rid of the floor vortex, by applying blowing b/c, than to try to correct for it's effects.

Additional Floor-Vortex Data

Figures 4.13 and 4.14 show the development of floor centerline pressure distributions, with angle-of-attack, at $C_D = 2.0$ and $C_D = 4.0$ respectively, with no floor b/c applied. Figure 4.15 summarizes the data for $C_D = 4.0$ in terms of vortex and impingement location. Corresponding pressure data, at both C_D 's are presented in Figure 4.16.

The impingement point moves forward, as expected, with angle-of-attack (Figure 4.15). The maximum suction point remains an almost-constant distance ahead of impingement which suggests that vortex size is not very dependent upon model angle-of-attack. The first positive pressure peak gives a general indication of the location of the ground separation point, however the peaks are not well defined at the high angles of attack.

The development of peak pressures is shown in Figure 4.16. At $C_u = 2$ this plot gives a good definition of the angle-of-attack for the onset of floor separation, i. e. where the vortex and impingement curves diverge from the single, first positive peak, line.

Application of floor blowing eliminates the vortex suction lines in Figure 4.16. However there is very little change in the impingement pressure curves.

5.0 FORCE AND MOMENT CORRELATIONS

5.1 Checkout for a Simple Wing

Before embarking upon an investigation of powered-model corrections, it appeared desirable to test the new, wall pressure signature-based angle-of-attack correction procedure on a simple model. Appropriate tunnel pressure and model force data were therefore obtained in tests on the wing shown in Figure 3.1.

Figure 5.1 compares C_L - α curves corrected by the classical, Glauert method (+-symbols) and by the new wall pressure signature method (circles). Wall pressure signature-derived blockage corrections, which were small, were applied in both cases. It is evident that the new method provides angle-of-attack correction estimates slightly smaller than those determined via the 'Glauert' approach. However the generally good agreement gave confidence that the new method works properly.

5.2 Selection of Singularity Geometry and Iteration Procedure

Geometry of Vortex and Source Elements

The effects of sweep and angle-of-attack on tunnel influence coefficients were discussed in some detail in Section 2 from a theoretical standpoint. Figure 5.2 shows results from a practical application to the swept-wing, knee-blown, jet-flap model in a test at $C_u = 2$. Influence matrices corresponding to two different element geometries were used in Figure 5.2(a) to correct measured data (chain lines) for comparison with "free air" data (circles) measured in the NASA-Ames 7' x 10' wind tunnel.

The broken lines show corrections based upon the "correct" swept element geometry set at 15-degrees angle-of-attack for both bound vortices and sources. For the full lines, simple, unswept elements were used. The influence of geometry is clearly very minor for this model and tunnel combination.

Effect of "cross" terms

Figure 5.2(a) displays over-correction of the lift curve. It has already been mentioned that previous blockage over-correction may have been a consequence of neglecting the effects of vortex-induced upwash "cross" effects on the sidewall signature. The broken lines in Figure 5.2(b) show the results of a full iteration, as outlined in Figure 2.11, applied to the previous example. The differences between the broken lines and the full lines are the effects of "cross" terms. As anticipated, the over-correction of the lift curve has been almost eliminated.

Further examination of the "cross" terms revealed that w-squared term - i.e. wake upwash at the tunnel wall centerline is by far the largest. It is also found that the effects of these terms become excessive beyond $C_L = 2$ (see Figure 5.2(c)). This suggests that the horizontal trailing vortex model starts to fail because its geometry is fixed. It may be shown that incremental C_L -corrections due to the effect of w-squared on blockage are

proportional to C_L -cubed for a fixed-geometry wake. The system is very sensitive, at high C_L , to small changes in wake location.

5.3 Analysis of Angle-of-Attack Corrections

The corrections for the knee-blown-flap models are dominated by blockage effects and the sensitivity to errors in angle-of-attack corrections is quite small when plotted in conventional lift curve and drag polar form. The present angle-of-attack corrections will therefore be assessed in comparison with other predictions.

The wall pressure signature method provides a continuous distribution of $\Delta\alpha$ along the tunnel axis and an effective model position must be selected which characterizes its aerodynamics. In the present case, a fixed location at $x = 0$ has been selected for both unswept and swept wings, recognizing that other locations - such as varying load centers derived from C_M and C_L - could be considered.

For the swept wing, the choice of the correction location at the root quarter-chord could be questioned. However an aft shift in C.P. location on adding sweep did not occur because a lower flap angle was also introduced, during design, to improve the drag polar. In fact, the measured swept-wing C.P. lay slightly forward of that for the straight wing in most cases. Both lay between the quarter and three-quarter root chord locations and moved forward or aft depending upon the balance between wing and flap lift.

Figure 5.3 shows angle-of-attack corrections, $\Delta\alpha$ for the basic swept wing as a function of blockage-corrected C_L . The three parts correspond to a) unpowered or low- C_u (i.e. BLC) conditions, b) moderate C_u 's with no floor impingement and c) cases with floor impingement, with floor blowing used. In all cases full-length roof and floor pressure signatures were employed, recognizing that errors arise from impingement regions.

Figure 5.3(a) shows that, as for the simple wing, wall-signature derived angle-of-attack corrections are slightly lower than the classical Glauert method but increase, per C_L , during and after stall. The hook-shaped $\Delta\alpha$ curves occur because the wing center-of-pressure moves back less rapidly with C_L after stall than it had moved forward prior to stall. It is known that the flap separates before the leading edge does at zero and low C_u values.

At moderate C_u values, with no floor impingement, Figure 5.3(b) shows smaller angle-of-attack corrections than both the Glauert (straight-wing) and the Williams-Butler estimates, even though the latter include a C_u -related attenuation factor. However the increase with C_L is more rapid for the signature-based estimates than for the others. Though the C.P. does move forward with angle-of-attack in both the cases shown, the streamwise angle-of-attack gradients are insufficient for this to be the full explanation. Changing flow geometry may also be partly responsible. This is almost certainly true in the impingement cases, at $C_u = 4.0$ and 6.0 , shown in Figure 5.3(c). Here, the trends are generally similar to those of the previous figure but the levels are in better agreement with the other estimates.

Angle-of-attack corrections for the unswept KBF model (not shown) are generally greater than for the swept geometry as should be expected, and lie above the Glauert values increasingly up to $C_{\mu}=2$. Above this, difficulties in signature analysis obscured the trends.

Comments

In the non-impinging cases described above, the $\Delta\alpha$ estimates by various methods are generally within a spread of about one-degree. Within this range, there is no experimental basis for saying which result is correct. Further refinement would probably require investigations of surface pressures - particularly leading edge suction peaks, in large and small tunnels. As mentioned previously, the consequences of these differences to the present force and moment data are not of major importance.

For impinging cases, the signature method indicates quite large $\Delta\alpha$ values at high C_{μ} compared with the simpler theories. However, the theoretical model used in these cases is clearly inadequate because it fails to recognize impingement. Improvement to the correction procedure is also required in these cases with regard to the roof/floor part of signature analysis.

5.4 Force and Moment Correlations for Unswept- and Swept-winged knee-blown jet-flap models.

Figures 5.4(a) through 5.7(c) show "free air" (broken lines) and corrected small tunnel force and moment data (points) for the four model configurations tested. In analyzing the data, 'whole' floor signatures were used in all cases except the straight wing at C_{μ} 's of 4 and above, which failed to converge using this procedure. In these cases, the roof signature only was used for angle-of-attack correction, after removing blockage effects and doubling the roof perturbations. For the same reason, computation was stopped after the first pass for all configurations when C_{μ} was 4 or greater. All uncoupled solutions (i.e. independent angle-of-attack and blockage solutions) are designated by an asterisk in the C_{μ} table.

NASA CR 152,241 (Ref 9) documents the first attempt to apply the wall pressure signature method to the present configurations. Relative to the earlier, 'q-pot' corrections of CR 152,032 (Ref 8) the Ref 9 pressure signature results were disappointing because the correlation with "free air" data was significantly worse for high- C_{μ} cases. This occurred largely because of flow breakdown itself but also to some degree because the signature analysis of the Ref 9 iterative method can respond adequately only to classical, single-peaked pressure signatures.

Straight-Wing, With and Without Slats

The previous over-correction tendency of the iterative, Reference 9 method has been largely overcome as a result of the better flexibility of the present method. The chance for success is increased further by ground blowing, as was seen in Section 4. Figures 5.4 and 5.5 show that the present method improves upon both the Ref 9 and the Ref 8 approaches. The latter had a tendency to over-correct at high C_{μ} and under-correct at low C_{μ} . The overall agreement is now within the limits of experimental error.

Selected unblown ground data have been added to Figure 5.4 (flagged points) to supplement Figure 4.3 which is based upon interim blockage corrections and includes Williams-Butler angle-of-attack corrections.

The crosses in Figure 5.4, at $C_{\mu} = 1$, correspond to an "overblown" ground-blowing case in which the blowing was set as for $C_{\mu} = 6$, $\alpha = 30$. The $C_{\mu} = 1$ case does not include impingement, so the results show that blowing maybe left operative at a "set and forget", worst-case level without significant change to other data. Any q -changes, due to excessive floor blowing, are accommodated automatically via the wall pressure signature, blockage correction procedure.

Swept Wing With and Without Tips Fitted

Relative to previous methods for correction the present swept wing corrections, Figures 5.6 and 5.7, show definite improvements in the drag polar correlations. However, lift curve slope still appears to have been over-corrected at or above $C_{\mu} = 4$, particularly for the with-tips case (Figure 5.7(a)). Pitching moments are less well corrected at $C_{\mu} = 6$ and 10 with the tips added (Figure 5.7(c)) but continue to agree well for the basic swept case (Figure 5.6(c)).

With the above relatively few qualifications it appears that the differences between the corrected and the free air data are not only within the experimental error band but have reached the point where possible corrections to the large-tunnel data should be reviewed. Rough calculations indicate that a large-tunnel C_L -value of 10 would be reduced by approximately 0.2 on correcting for blockage effects. This is of the same magnitude as the anticipated experimental error.

6.0 DISCUSSION

6.1 Aerodynamics

Overview

The methods described above bring to the wall pressure signature method new, more powerful and more comprehensive capabilities. These include an order-of-magnitude reduction in run time and angle-of-attack correction capability. During development, an effort has been made to make an effective trade between flexibility and ease of use. Some typical simplifications which have been included are the use of "whole" tunnel floor pressure signatures knowing that they contain impingement spikes, and the use of a constant effective model location, rather than one which responds to known changes in C. P. location. Despite these self-imposed restrictions the present methods have achieved good successes.

There were major questions, at the start of the present work, concerning the sensitivity of the wall pressure signature method to model geometry, particularly to sweep and angle-of-attack effects. Strong sensitivity would have made the method much less useful. In most respects insensitivity has been found not only to sweep and angle-of-attack but also to singularity spacing. Sensitivity has been found, however, to vortex wake location under high lift conditions. This will be discussed below.

Cases with jet-impingement and floor-blowing were the subject of an extension to the work planned originally. The use of floor tangential blowing and wall pressure signature based blockage corrections is a prerequisite to several of the discussions of impingement effects at high- C_{μ} which appear elsewhere in this report. However, theoretical modeling for cases with impingement is currently much less advanced than for cases without it. It is anticipated that jet-in-crossflow experience (see Part II) will help significantly when improving impinged-jet flow models. Further discussion of impingement modeling and its problems will follow that for non-impinging cases, below.

Wake Modeling for Non-Impinging Cases

AGARD Report 692 is a country-by-country review of wind tunnel correction methods for high angle-of-attack models. Repeated reference is made to the fact that tunnel-induced wake distortion must be considered, even for unpowered models, during the correction process. This appears to contradict the assertion, in sub-section 2.3, that wake vortex movement is not significant for the present KBF tests. While the present very high- Q test results support the AGARD 692 assertions, an apparent paradox remains in the lower ranges, including most of the region of practical interest.

A vortex pair shed to the 50-percent semi-width positions in a rectangular wind tunnel, at mid-height, possesses the special property of being in equilibrium in the cross-plane. This may be confirmed by considering image vortices which give cancelling induced velocities at say, the right-hand trailer (see Figure 6.1). Members of a vortex pair shed near to these special points in the

tunnel orbit them at a rate determined by vortex strength. This appears to be the situation for the basic KBF models, which span 46.5% of the width of the 'MTF' tunnel. This choice of model size may explain the paradox mentioned above.

The above special result for 50% semi-span models is not new, but it may have new significance for sizing and positioning models in tests at very high lift. For example, if a powered model's span must exceed 50% of the tunnel width, consideration of near-wake distortion could be used to locate an optimum, above-center location in the wind tunnel. This would also relieve the impingement problem. Further work in this area appears worthwhile.

Wake Modeling for Impinging Cases

The most significant property of an impinging flow of the present type is probably that the circulation and span of the downstream vortex wake no longer define the total lift on the model. This is because the existence of the floor stagnation point permits vortex lines to link to the tunnel floor. Mathematically, the connectedness of the region is changed by floor stagnation and closed circuits can no longer be drawn which define the model's bound vorticity. It is partly for this reason that an obvious step, of linking total vortex strength to model lift, was not incorporated as part of the angle-of-attack correction procedure in the present work.

The first problem encountered in setting up an impingement model is to determine how much of the bound vorticity trails downstream and how much joins to the tunnel floor via the jet. In unblown-floor cases, the standing floor separation vortex (Figure 4.5 etc.) tends to confuse the issue. Some tentative trials have been made using tunnel surface pressures, in blown floor cases. Tests with several combinations of model-to-floor and trailing vortex systems gave disappointing results. Tests at $C_u = 6$ and 10, and usually 4.0, (Figures 5.4 through 5.7), include impingement, but were corrected using flow models which ignore it entirely, except via the fact that tunnel surface boundary conditions are satisfied. The success of the corrections is difficult to explain. While some necessary conditions for this success certainly can be identified in the present studies (for example, the use of floor blowing and signature-type methods) additional conditions are needed to complete a sufficient set. These are difficult to identify: the topic requires further work.

6.2 Signature Analysis

Inverse Methods

Recognizing that the first stage of signature analysis comprises the solution of a three-dimensional inverse problem, the methods in Section 2 were reviewed by a researcher in inverse wing design. It was found that conventional inverse techniques could be applied to the present problem. A paneled shape corresponding to the model and its wake might be found using tunnel wall pressures as the objective function, leading eventually to interference velocities. Further review reveals, however, that this approach would neither be sufficiently compact, nor sufficiently fast for practical use in routine wind tunnel correction work.

Flow Model Geometry

Though the insensitivity of the overall method to most model details, mentioned above, is interesting aerodynamically, its predominant importance lies in the simplifications it affords when the new methods are applied. If significant sensitivity to sweep and/or angle-of-attack (in particular) had been found, individual influence matrices might have been needed for (at worst) every data point. As it has transpired, relatively few matrices will be needed for any particular test.

While introduction of "cross"-term capability (Sections 2 and 5) lead to the above result, it also revealed sensitivity to wake location as discussed above. Within the present framework, the effect has been to limit quite severely the use of "cross"-terms to improve the results. New experimental and/or theoretical techniques are needed, to locate the vortex wake, before the capabilities of the present methods can be exploited fully.

Data 'Conditioning'

As for the previous, iterative method, the main task of data pre-conditioning is to subtract empty tunnel wall supersonicities from corresponding model-present data (see NASA CR152, 241, Section 4). A subsequent conditioning task, in the present case, will be the removal of jet-in-crossflow induced velocity components when appropriate. The last conditioning stage, which concerns data smoothing, is embedded in the signature analysis itself both for the previous, non-iterative and for the present method. Though the latter employs a least-squares procedure for signature fitting, recent experience has shown this to be insufficient to prevent a blocked pressure orifice at the 'wrong' location from spoiling otherwise good data. A bad-point rejection filter, similar to that used in the earlier algorithm, is needed.

The impingement-case floor-signature is a heavy candidate for data conditioning. Currently, it is either accepted in full, at user option, or it is rejected in favor of 'doubled-up' tunnel roof data. This is not always a good alternative. However, there are a number of unanswered questions concerning how an impingement 'spike', for example, should be treated (e.g.: Is it theoretically correct to fair it out?). The answers to such questions should become more apparent as impingement modeling becomes better understood.

7.0 CONCLUSIONS

Recent advances in wall pressure signature methods are described and used to estimate angle-of-attack and blockage constraint effects for several powered models in low-speed tunnel tests. Tunnel floor BLC was employed at high C_u , to control flow breakdown. The combined techniques permitted successful testing well beyond usually accepted limits.

Use of Tunnel-Floor BLC to Control Flow Breakdown

Control of tunnel flow breakdown was accomplished using tangential blowing, along the tunnel floor, from a point just ahead of the model (Figure 3.6). Floor pressures were monitored to determine blowing settings. Subsequent flow measurements, with an LV anemometer, showed that the floor BLC had destroyed the vortex ahead of jet impingement.

Other observations include:

- (1) Elimination of the floor vortex resulted in a large increase in upwash at the model location.
- (2) Lift loss relative to 'free-air' conditions at high C_u was eliminated.
- (3) There was a significant reduction in tunnel blockage when floor BLC was used.
- (4) Floor pressures may be used to monitor vortex destruction: floor blowing is increased until the suction peak ahead of impingement is eliminated.
- (5) Overblowing is not harmful. An entire test may be performed, without detriment, with blowing set for "worst-case" conditions.
- (6) The span of the blowing slot must be no less than the powered span of the model.
- (7) The BLC needed in the present tests significantly exceeded that which would be provided by a moving ground matched to tunnel speed.

Use of Wall Pressure Signatures for Angle-of-Attack Correction

Tunnel roof and floor pressures were used to determine the strengths of horseshoe vortices, used to represent model lift effects, and thence angle-of-attack corrections. The technique was very successful for a simple wing but the corrections for powered models were less easy to interpret because in many cases strong blockage effects and floor impingement were also present. Some specific observations:

- (8) $\Delta\alpha$ estimates for unpowered cases and for low-range powered cases were generally slightly lower than the classical 'Glauert' predictions.
- (9) In the low- to medium- C_u range, $\Delta\alpha$ values were comparable with Williams/Butler estimates (Ref. 11) at low angle-of-attack but increased more rapidly with α .

- (10) At high- C_u , $\Delta\alpha$ values determined from roof/floor pressures were generally high. Other tendencies were as just noted.

It is not possible to judge, from the present experiments, which of the $\Delta\alpha$ estimates was 'correct'. It is possible that the 'changing- δ ' effect is related to changes in jet-sheet geometry as angle-of-attack is increased.

Combined Blockage and Angle-of-Attack Correction Program

New developments in the wall pressure signature method include:

- o Angle of attack correction capability (see above).
- o Use of fixed geometry, multi-singularity solutions which replace the previous, iterative moving-singularity procedure (Ref. 9).
- o Application of a least-squares approach which gives both smoothed fits to experimental data and reduced matrix size.
- o Use of a generalized singularity routine to generate influence coefficients for swept geometries at angle-of-attack, including "cross" effects for non-planar cases. The latter are also applicable to offset models.
- o Generation of a combined blockage and angle-of-attack algorithm capable of handling non-planar "cross" effects (see Figure 2.11).

The following facts have emerged:

- (11) The matrix method is almost an order-of-magnitude faster than the previous iterative method when applied to a given problem.
- (12) The least-squares approach works well for smoothing 'local noise' but an additional point-rejection scheme is required for "rogue" points (blocked orifices, electrical 'spikes' etc). This has not been implemented.
- (13) The least-squares approach cannot and should not be used when combining blockage and angle-of-attack solutions: iteration between these is effective.
- (14) The use of swept singularities, at angle-of-attack produced little change relative to corresponding straight-wing results in the present applications (Figure 5.2(a)).
- (15) For the cases investigated, the only significant coupling between lift and blockage solutions was via trailing-vortex-induced upwash on sidewall blockage signatures.
- (16) The above coupling is significant at high Q : incremental Q 's, due to wall upwash, are proportional to Q -cubed.
- (17) The coupling term is very sensitive to wake geometry. This was a limiting factor in the present application.

Application to Unswept and Swept-Wing Kne-Blow, Jet Flap Model Data

Application of the above methods gave generally improved correlations of corrected small-tunnel data with large-tunnel, free-air data. The level of disagreement is now comparable with experimental error. The following qualifications should be noted:

- (18) Fully coupled solutions gave improved results, particularly in reducing overcorrection for blockage, only for C_{μ} less than or equal to 2.
- (19) Above $C_{\mu} = 2$, the inclusion of the sidewall upwash term reduced the blockage correction too much. It is suspected that the assumption of an undeflected vortex wake may be responsible for this at mid-range C_{μ} 's. Improved impinging-jet flow models are required for high- C_{μ} cases.
- (20) The tendency to overcorrect lift curves at high C_{μ} , noted previously for the configuration with tips fitted (Figure 5.7(a)), has been reduced but not eliminated by the present methods. Drag polar and pitching moment correlations are quite good.

8.0 REFERENCES

1. Hackett, J. E.; and Justice, J. L.: The Aerodynamics of a Fixed Ground Plane for a Powered STOL Wind Tunnel Model. AIAA Paper 71-266 and *J. of Aircraft*, March 1973.
2. Hackett, J. E.; and Praytor, E. B.: Ground Effect for V/STOL Aircraft Configurations and Its Simulation in the Wind Tunnel, Part I - Introduction and Theoretical Studies. NASA CR 114,495. November 1972.
3. Hackett, J. E.; Boles, R. A.; and Praytor, E. B.: Ground Effect for V/STOL Aircraft Configurations and Its Simulation in the Wind Tunnel, Part II - Experimental Studies. NASA CR 114,496, November 1972.
4. Hackett, J. E.; Praytor, E. B.; and Caldwell, E. O.: Ground Effect for V/STOL Aircraft Configurations and Its Simulation in the Wind Tunnel, Part III - Application to the NASA-Ames 40- by 80-foot Wind Tunnel. NASA CR 114,497, November 1972.
5. Hackett, J. E.; and Boles, R. A.: High Lift Testing in Closed Wind Tunnels. AIAA Paper No. 74-641, July 1974 (also see *J. Aircraft*, August 1976).
6. Hackett, J. E.; Boles, R. A.; and Lilley, D. E.: Ground Simulation and Tunnel Blockage for a Jet-Flapped, Basic STOL Model Tested to Very High Lift Coefficients. NASA CR 137,857, March 1976.
7. Hackett, J. E.; and Wilsden, D. J.: Determination of Low Speed Wake-Blockage Corrections via Tunnel-Wall Static Pressure Measurements. Presented at AGARD Wind Tunnel Design and Testing Techniques Conference, October 1975, in London, England. AGARD CP 174, Paper 23, October 1975.
8. Hackett, J. E.; and Boles, R. A.: Ground Simulation and Tunnel Blockage for a Swept, Jet-Flapped Wing Tested to Very High Lift Coefficients. NASA CR-152032, June 1977.
9. Hackett, J. E.; Wilsden, D. J.; Lilley, D. E.: Estimation of Tunnel Blockage from Wall Pressure Signatures: A Review and Data Correlation. NASA CR 152,241, March 1979.
10. Hackett, J. E.; Wilsden, D. J.; Stevens, W. A.: A Review of the 'Wall Pressure Signature and Other Tunnel Constraint Correction Methods for High Angle-of-Attack Tests.' Presented to the AGARD Fluid Dynamics Panel in Munich, FRG, May 1980. See also AGARD Report No. 692.
11. Williams, J.; and Butler, S. F.: Experimental Methods for Testing High Lift BLC and Circulation Control Models. In *Boundary Layer and Flow Control* by Lachman (ed), Vol. 1, Pergamon Press, 1961, p. 395.
12. Pope, A.; and Harper, J. J.: *Low Speed Wind Tunnel Testing*. Published by John Wiley and Sons, 1966.

13. Hackett, J. E.; Evans, M. R.: Vortex Wakes Behind High Lift Wings.
Journal of Aircraft, May 1971, pp 334-340.
14. Base, T. E.; and Hackett, J. E.: A Generalized Program for u, v and w
Velocities Induced by 3-D Line-Source, Vortex and Doublet Element.
Lockheed-Georgia Engineering Report No. LG80ER0138.

TABLE I
MODEL DIMENSIONS

Fuselage:

| | | |
|------------------------------|-----------------------|-------------------------|
| length | 31.55 cm | (12.42 in) |
| maximum width | 4.46 cm | (1.76 in) |
| maximum height | 7.76 cm | (3.06 in) |
| maximum cross-section | 30.30 cm ² | (4.70 in ²) |
| equivalent diameter | 6.21 cm | (2.44 in) |
| nose location | FS 0.00 cm | (FS 0.00 in) |
| fineness ratio | 5.08 | 5.08 |
| balance centerline location: | | |
| water line | 40.64 cm | (16.00 in) |
| butt line | 0.00 cm | 0.00 cm |
| reference point: | | |
| fuselage station | 0.00 cm | (0.00 in) |
| water line* | 0.00 cm | (0.00 in) |
| butt line | 0.00 in | (0.00 in) |

Straight Wing:

| | | |
|-----------------------------|----------|------------|
| sweep | 0° | 0° |
| quarter chord MAC location: | | |
| fuselage station | 1.27 cm | (0.50 in) |
| water line | 38.10 cm | (15.00 in) |
| butt line | 12.70 cm | (5.00 in) |

Swept Wing:

| | | |
|-----------------------------|----------|------------|
| sweep | 25° | 25° |
| quarter chord MAC location: | | |
| fuselage station | 6.64 cm | (2.71 in) |
| water line | 38.10 cm | (15.00 in) |
| butt line | 12.70 cm | (5.00 in) |

Straight and Swept Wings:

| | | |
|---------------------------------|------------------------|--------------------------|
| wing: | | |
| area | 517.00 cm ² | (0.556 ft ²) |
| aspect ratio (on nominal chord) | 5.00 | |
| span | 50.80 cm | (20.00 in) |
| nominal chord (constant) | 10.16 cm | (4.00 in) |
| quarter chord water line | 38.10 cm | (15.00 in) |
| twist | 0° | 0° |


*Water line 0.0 is small tunnel floor with model on tunnel centerline.

TABLE I - Continued

MODEL DIMENSIONS

| | | |
|--------------------------------------|------------------------|--------------------------|
| wing and tips: | | |
| area | 968.00 cm ² | (1.042 ft ²) |
| aspect ratio (on nominal chord) | 6.00 | |
| span | 76.20 cm | (30.00 in) |
| nominal chord | 12.70 cm | (5.00 in) |
| leading edge slat: | | |
| area (projected onto maximum chord): | | |
| wing only | 103.00 cm ² | (0.111 ft ²) |
| wing and tips | 155.00 cm ² | (0.167 ft ²) |
| span: | | |
| wing only | 50.80 cm | (20.00 in) |
| wing and tips | 76.20 cm | (30.00 in) |
| chord (maximum) | 2.03 cm | (0.80 in) |
| slot width | 0.127 cm | (0.050 in) |
| deflection | 80.00 | |
| trailing edge flap: | | |
| area (projected onto maximum chord) | 234.00 cm ² | (0.252 ft ²) |
| span | 50.80 cm | (20.00 in) |
| chord (maximum) | 4.60 cm | (1.81 in) |
| slot width | 0.041 cm | (0.016 in) |
| deflections (wing chord to flap | | |
| upper surface) | 76.00° | 76.00° |
| straight wing | 60.00° | 60.00° |
| swept wing | | |

FIGURES

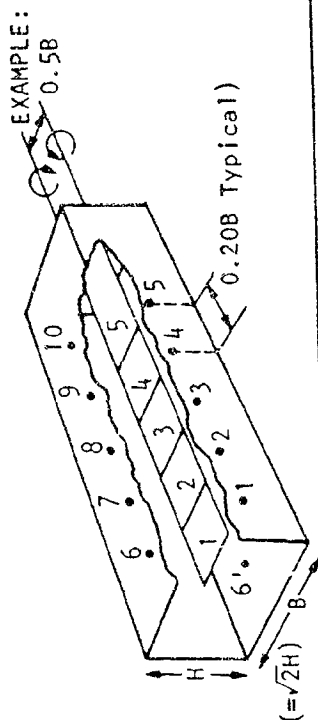

| Location | Source Coefficients | | | | | Vortex Coefficients | | | | |
|----------|---------------------|--------|--------|--------|--------|---------------------|--------|--------|--------|--------|
| | 1 | 2 | 3 | 4 | 5 | 1 | 2 | 3 | 4 | 5 |
| 1 | 0.5000 | 0.1440 | 0.0388 | 0.0115 | 0.0023 | +.4033 | +.2016 | +.0895 | +.0379 | +.0154 |
| 2 | 0.8560 | 0.5000 | 0.1440 | 0.0388 | 0.0115 | +.6052 | +.4033 | +.2016 | +.0895 | +.0379 |
| 3 | 0.9611 | 0.8560 | 0.5000 | 0.1440 | 0.0388 | +.7160 | +.6052 | +.4033 | +.2016 | +.0895 |
| 4 | 0.9885 | 0.9611 | 0.8560 | 0.5000 | 0.1440 | +.7691 | +.7160 | +.6052 | +.4033 | +.2016 |
| 5 | 0.9967 | 0.9885 | 0.9611 | 0.8560 | 0.5000 | +.7939 | +.7691 | +.7160 | +.6052 | +.4033 |
| 6 | 0.5000 | 0.0832 | -.0081 | -.0082 | -.0034 | 0.4113 | 0.2755 | 0.1176 | 0.0458 | 0.0175 |
| 7 | 0.9168 | 0.5000 | 0.0832 | -.0081 | -.0082 | 0.2755 | 0.4113 | 0.2755 | 0.1176 | 0.0458 |
| 8 | 1.0081 | 0.9168 | 0.5000 | 0.0832 | -.0081 | 0.1176 | 0.2755 | 0.4113 | 0.2755 | 0.1176 |
| 9 | .0082 | 1.0081 | 0.9168 | 0.5000 | 0.0832 | 0.0458 | 0.1176 | 0.2755 | 0.4113 | 0.2755 |
| 10 | 1.0034 | 1.0082 | 1.0081 | 0.9168 | 0.5000 | 0.0175 | 0.0458 | 0.1176 | 0.2755 | 0.4113 |
| 6' | 0.5000 | 0.0832 | -.0081 | -.0082 | -.0034 | -.4113 | -.2755 | -.1176 | -.0458 | -.0175 |
| 7' | 0.9168 | 0.5000 | 0.0832 | -.0081 | -.0082 | -.2755 | -.4113 | -.2755 | -.1176 | -.0458 |
| 8' | 1.0081 | 0.9168 | 0.5000 | 0.0832 | -.0081 | -.1176 | -.2755 | -.4113 | -.2755 | -.1176 |
| 9' | 1.0082 | 1.0081 | 0.9168 | 0.5000 | 0.0832 | -.0458 | -.1176 | -.2755 | -.4113 | -.2755 |
| 10' | 1.0034 | 1.0082 | 1.0081 | 0.9168 | 0.5000 | -.0175 | -.0458 | -.1176 | -.2755 | -.4113 |

Figure 2.1 Influence matrices for source and vortex arrays

SOURCE-SINK SYSTEM

| | | | | |
|--------|--------|---------|---------|---------|
| 0.5000 | 0.0832 | -0.0081 | -0.0082 | -0.0034 |
| 0.9168 | 0.5000 | 0.0832 | -0.0081 | -0.0082 |
| 1.0081 | 0.9168 | 0.5000 | 0.0832 | -0.0081 |
| 1.0082 | 1.0081 | 0.9168 | 0.5000 | 0.0832 |
| 1.0034 | 1.0082 | 1.0081 | 0.9168 | 0.5000 |

 $A_{R/F}$

HORSESHOE VORTEX SYSTEM

| | | | | |
|--------|--------|--------|--------|--------|
| 0.4113 | 0.2755 | 0.1176 | 0.0458 | 0.0175 |
| 0.2755 | 0.4113 | 0.2755 | 0.1176 | 0.0458 |
| 0.1176 | 0.2755 | 0.4113 | 0.2755 | 0.1176 |
| 0.0458 | 0.1176 | 0.2755 | 0.4113 | 0.2755 |
| 0.0175 | 0.0458 | 0.1176 | 0.2755 | 0.4113 |

| | | | | |
|--------|--------|--------|--------|--------|
| +3.295 | -0.947 | +0.231 | -0.028 | +0.015 |
| -7.507 | +5.422 | -1.434 | +0.254 | -0.028 |
| +8.630 | -9.931 | +5.956 | -1.434 | +0.231 |
| -8.426 | 10.590 | -9.931 | +5.422 | -0.947 |
| +6.576 | -8.426 | +8.630 | -7.507 | +3.295 |

 $A_{R/F}^{-1}$

| | | | | |
|--------|--------|--------|--------|--------|
| +4.915 | -4.470 | +2.066 | -0.818 | +0.246 |
| -4.470 | +8.968 | -6.308 | +2.707 | -0.818 |
| +2.066 | -6.308 | +9.700 | -6.308 | +2.066 |
| -0.818 | +2.707 | -6.308 | +8.968 | -4.470 |
| +0.246 | -0.818 | +2.066 | -4.470 | +4.915 |

| | | | | |
|--------|--------|--------|--------|--------|
| +0.398 | +0.116 | +0.228 | -0.131 | +0.181 |
| -6.855 | +3.254 | -0.165 | -0.128 | +0.273 |
| +4.725 | -6.216 | +3.466 | -0.743 | +0.493 |
| -9.653 | +8.663 | -5.958 | +2.201 | +0.429 |
| +3.997 | -7.672 | +8.045 | -6.080 | +2.819 |

 $A_{R/F}^{-1} * A_C$

| | | | | |
|--------|--------|--------|--------|--------|
| +0.409 | +0.173 | -0.191 | +0.079 | -0.056 |
| -1.391 | +2.049 | -0.750 | +0.187 | -0.072 |
| -0.165 | -0.145 | +0.948 | -0.206 | -0.049 |
| -1.011 | +1.540 | -1.596 | +1.507 | -0.354 |
| -0.763 | +1.079 | +0.218 | -0.523 | +0.701 |

Figure 2.2 Application of influence matrices

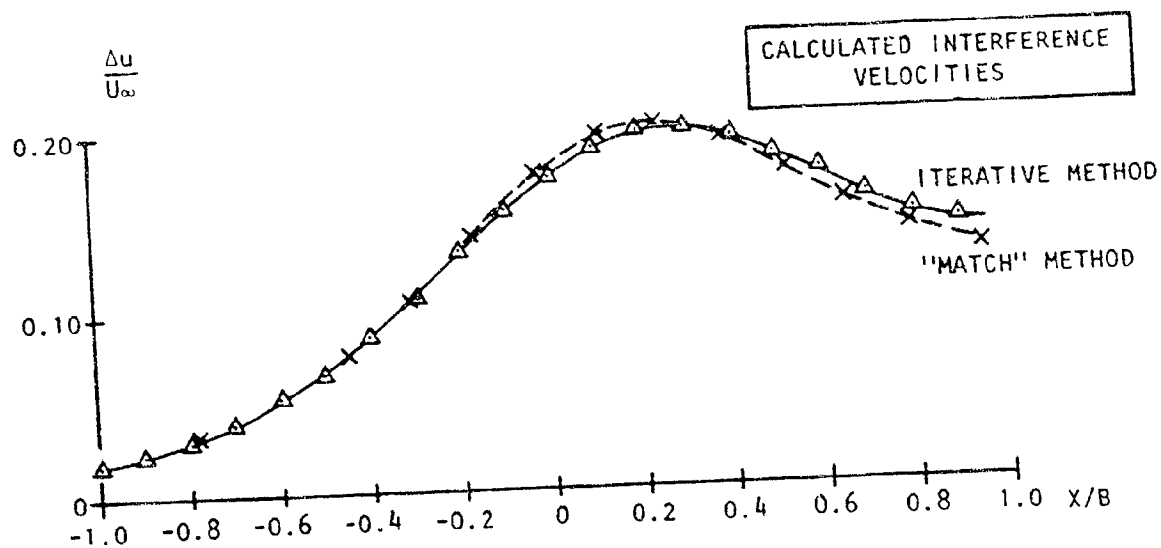
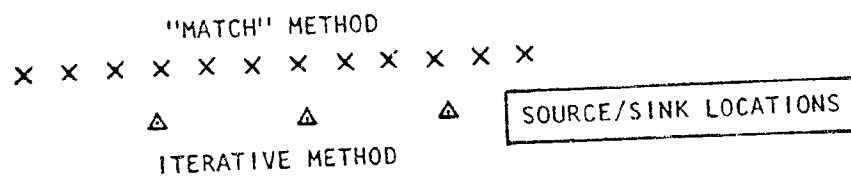
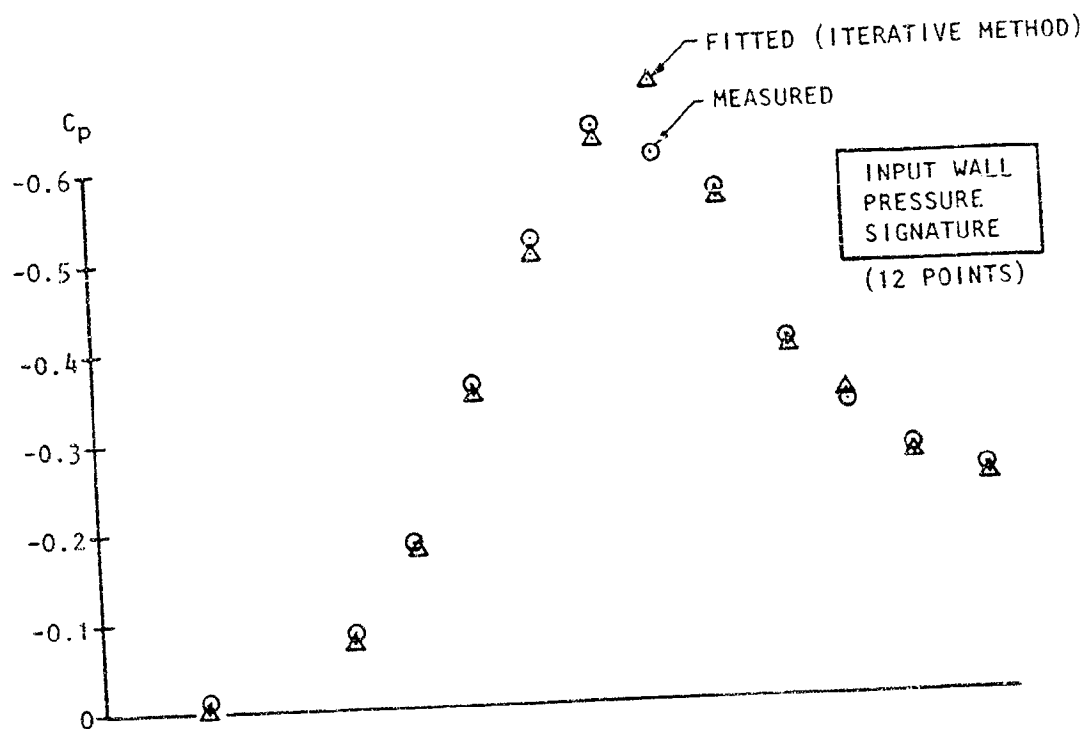


Figure 2.3 Performance of "match" and iterative methods (6' x 6' normal plate in 16½' x 23½' tunnel).



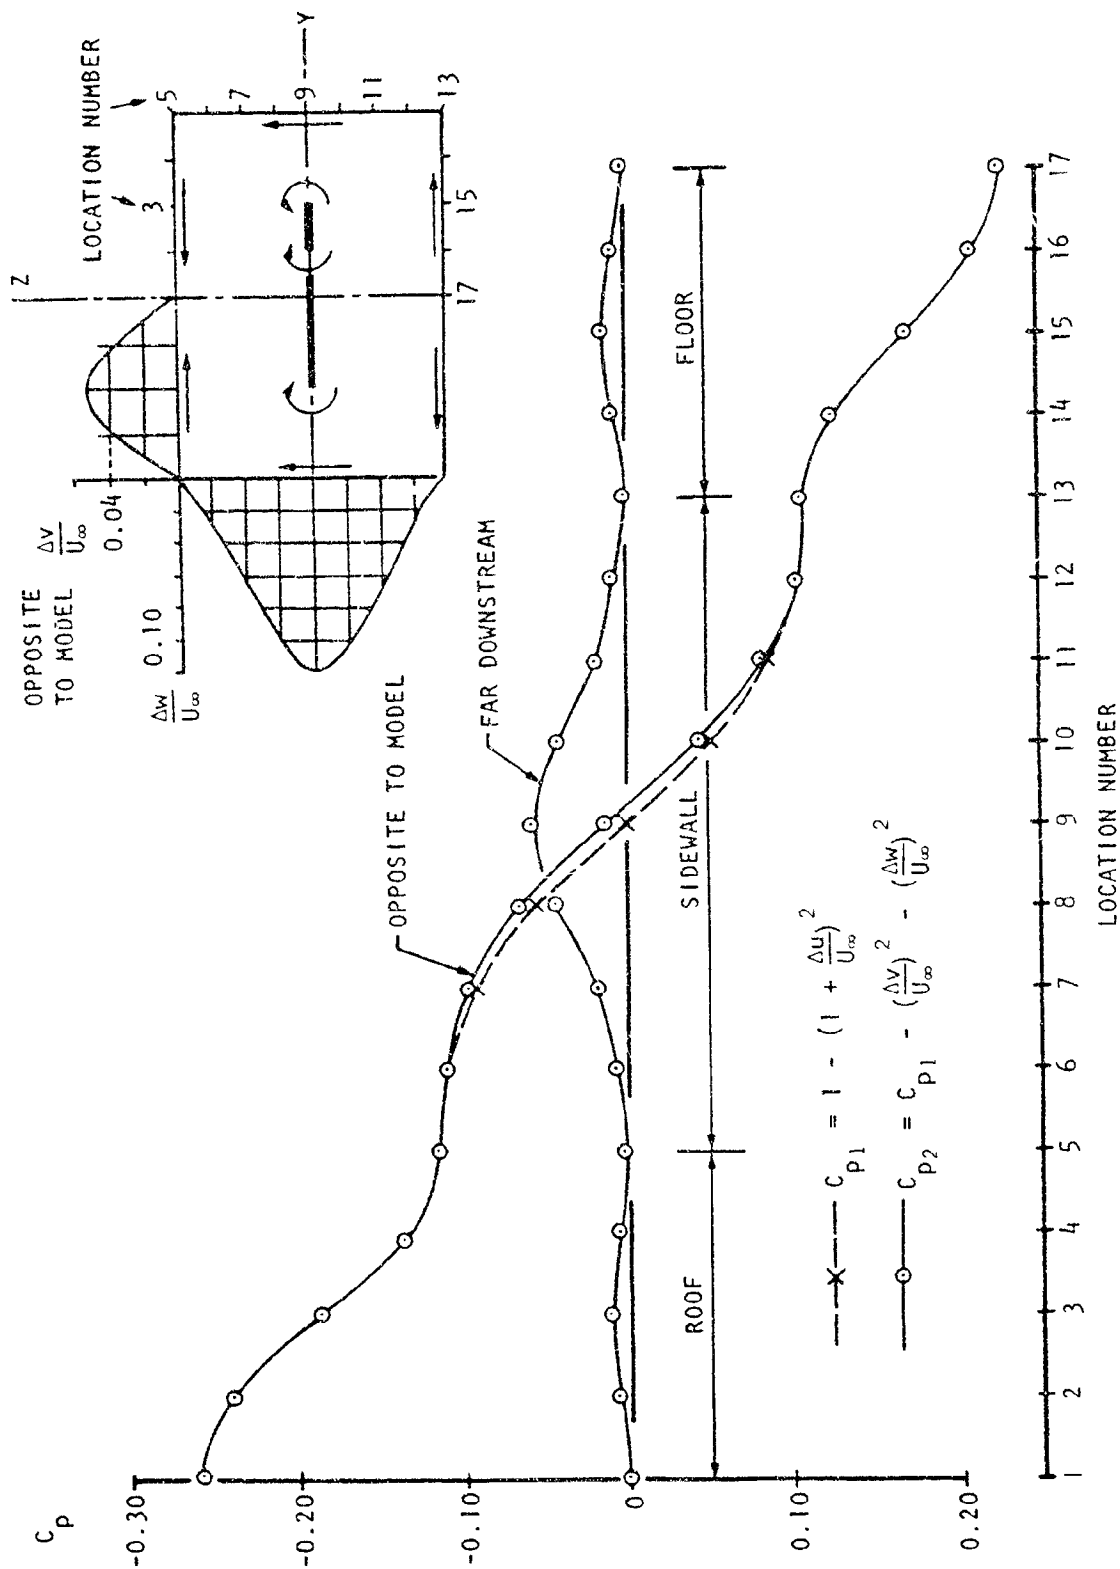



Figure 2.4 Tunnel surface pressures for a horseshoe vortex, ($C_L/AR = 1.0$)

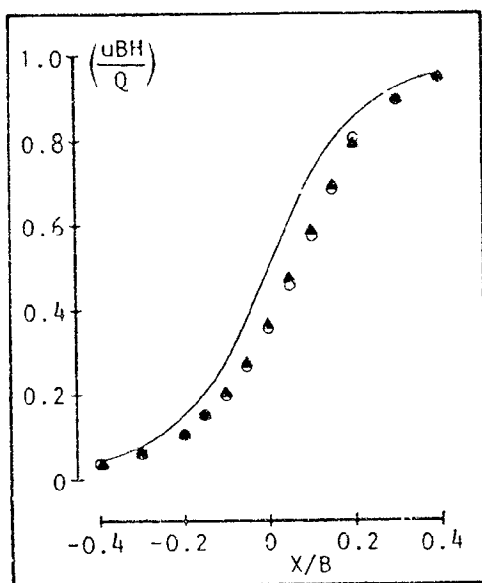


(a) AXIAL VELOCITY DUE TO SOURCES

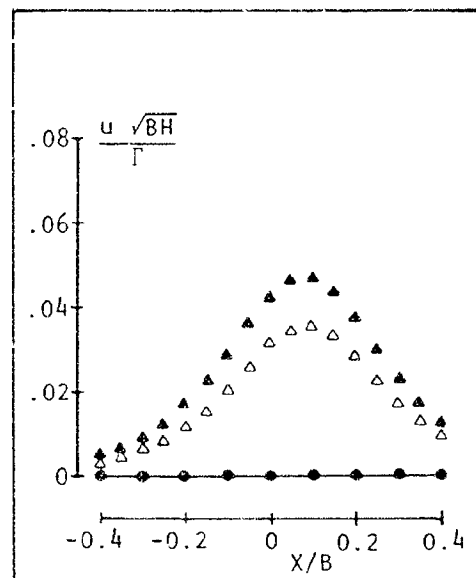

(b) AXIAL VELOCITY DUE TO VORTICES

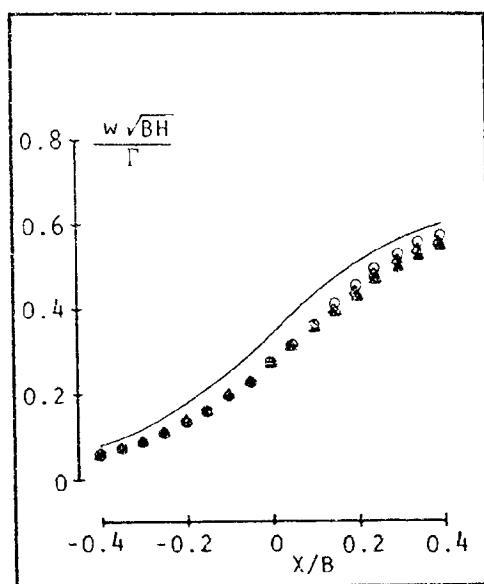


(c) UPWASH DUE TO VORTICES

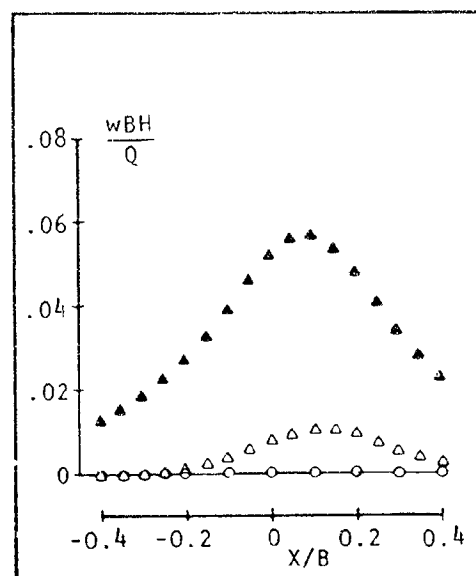


(d) UPWASH DUE TO SOURCES

— STRAIGHT WING
 ○ ● 25° SWEEP, $\alpha = 0^\circ$
 △ ▲ 25° SWEEP, $\alpha = 25^\circ$
 — PIVOT AT ROOT
 — PIVOT AT MID-SEMI-SPAN

Figure 2.5 Effect of combined sweep and angle-of-attack on influence curves for tunnel sidewall

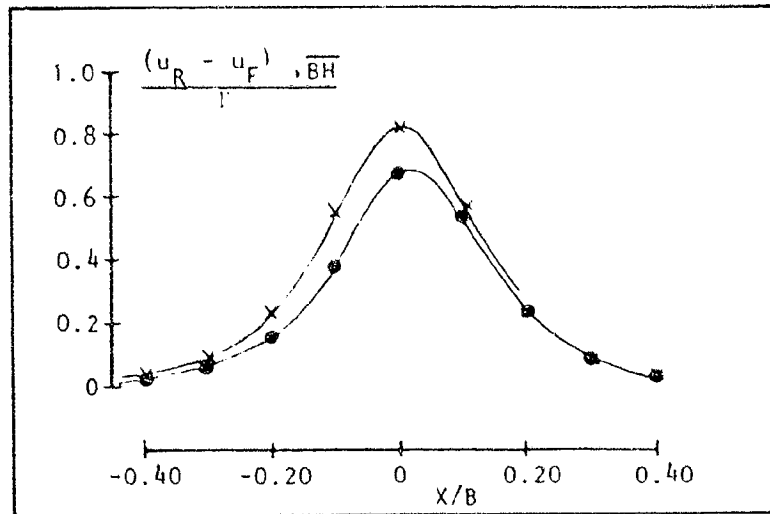

(a) AXIAL VELOCITY DUE TO VORTICES

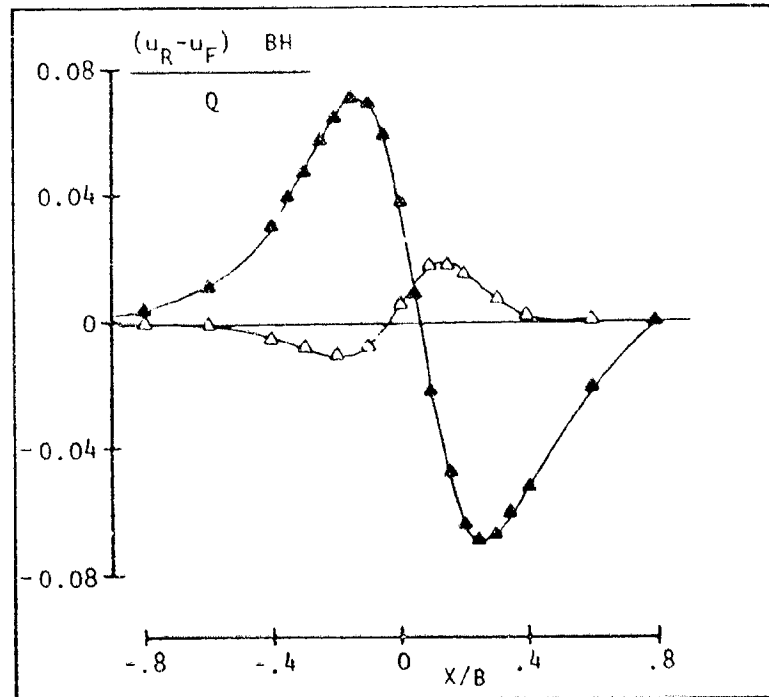

(b) AXIAL VELOCITY DUE TO SOURCES

× STRAIGHT WING

○

● 25° SWEEP, $i = 0^\circ$

△

▲ 25° SWEEP, $i = 25^\circ$

└ PIVOT AT ROOT

└

└ PIVOT AT MID SEMI-SPAN

Figure 2.6 Effect of combined sweep and angle-of-attack on roof-minus-floor influence curves

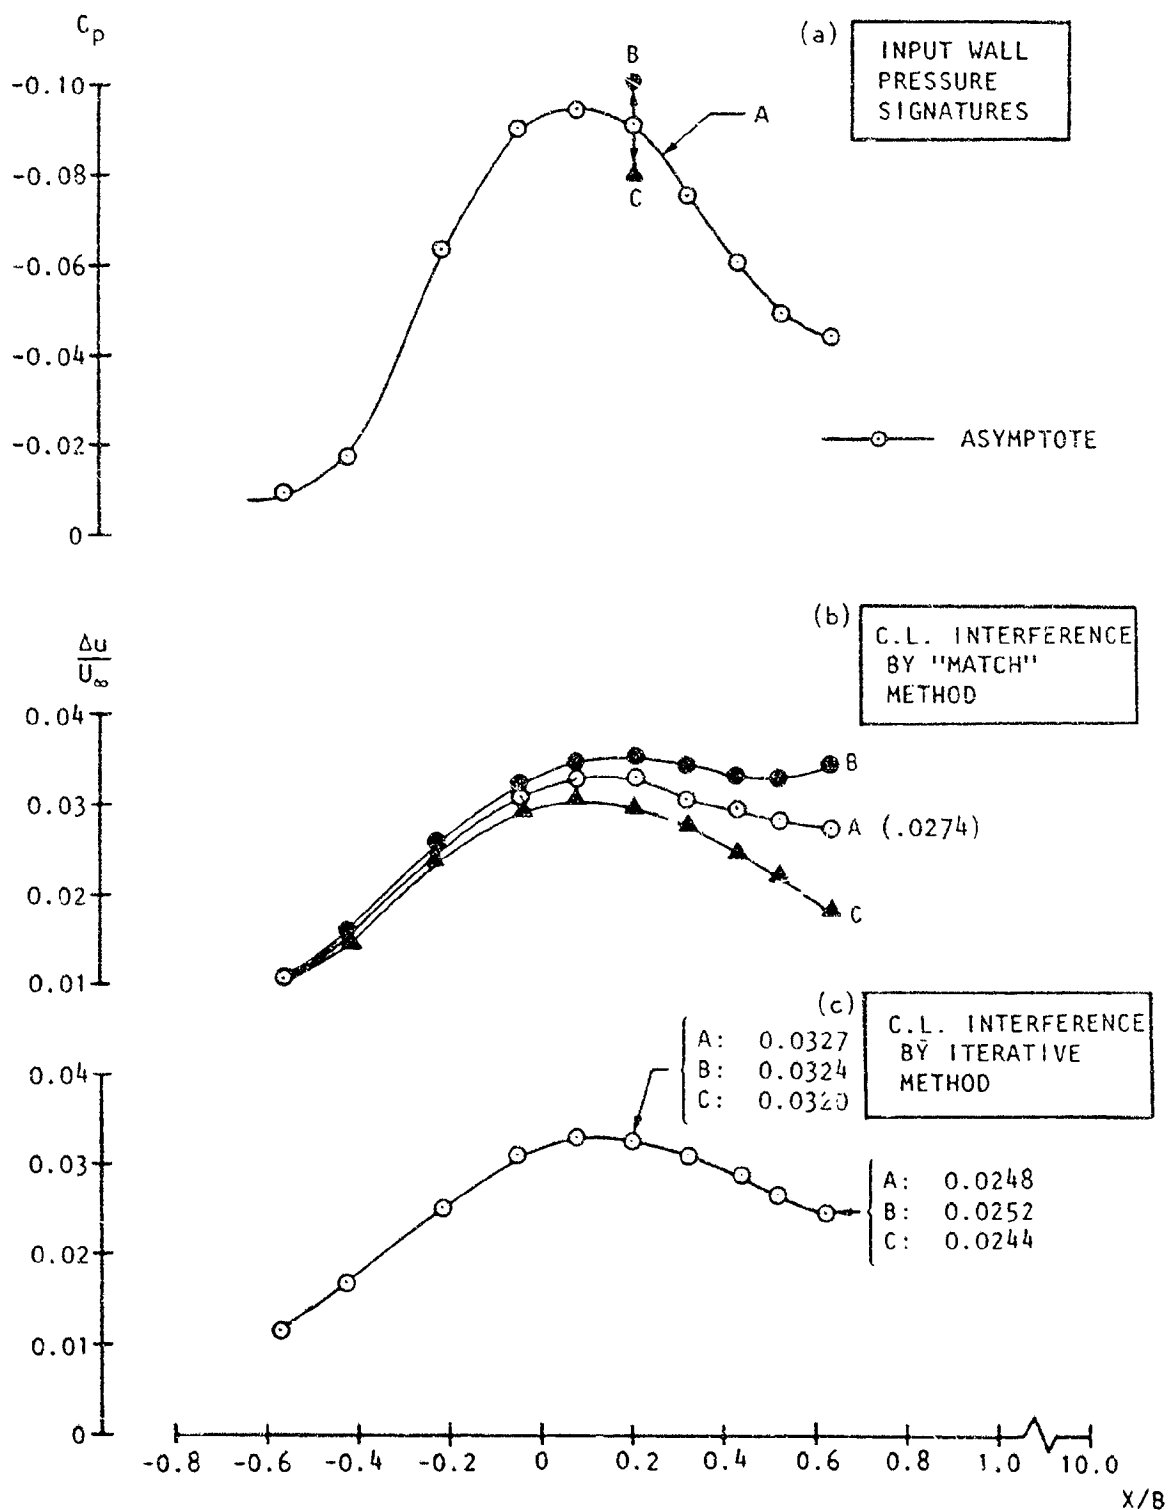


Figure 2.7 Sensitivity of "MATCH" and iterative methods to data scatter ("SAS" car model in $16\frac{1}{2}' \times 23\frac{1}{4}'$ tunnel)

| | SOURCE-SINK SYSTEM | | | | | HORSESHOE VORTEX SYSTEM | | | | |
|--------------------|--|--|--|---|--|---|---|---|---|---|
| $A_{R/F}$ | 4.1301 3.4523 2.5121 1.4963 0.5681 | 3.4523 3.1302 2.4400 1.4999 0.5761 | 2.5121 2.4400 2.1138 1.4236 0.5756 | 1.4963 1.4999 1.4236 1.0976 0.4994 | 0.5681 0.5761 0.5756 0.4994 0.2571 | 0.18152 0.18400 0.12964 0.0742 0.0372 | 0.18400 0.23387 0.20578 0.13690 0.07420 | 0.12964 0.20578 0.24192 0.20578 0.12964 | 0.07420 0.13690 0.20578 0.23387 0.18400 | 0.03720 0.07420 0.12964 0.18400 0.18152 |
| $A_{R/F}^{-1}$ | 11.819 -30.239 39.304 -40.297 31.928 | 30.239 87.972 -127.700 136.490 -109.550 | 39.304 -127.700 210.970 -245.350 203.600 | 40.297 136.490 -245.350 312.460 -274.470 | 31.928 -109.550 203.600 -274.470 256.170 | 69.57 -109.44 90.29 -52.91 19.64 | -109.44 209.03 -205.39 134.72 -52.91 | 90.29 -205.39 25.68 -205.39 90.29 | -52.91 134.72 -205.39 209.03 -109.44 | 19.64 -52.91 90.29 -109.44 69.57 |
| $A_{R/F}^{-1} A_G$ | 1.4358 1.5511 1.9638 2.9241 4.6633 | -3.7245 -4.2895 -6.1057 -9.6820 -15.8120 | 5.9404 7.5369 11.4460 18.7290 29.7270 | -7.7723 -10.3330 -15.7330 -24.8560 -40.7450 | 7.2772 9.8603 15.0590 23.9840 39.6700 | 3.2593 3.5767 3.4637 3.4428 3.4323 | -4.0683 -4.0744 -3.8549 -3.9375 -3.9746 | 2.7926 2.8261 3.0208 3.2108 3.2352 | -1.4665 -1.5108 -1.5972 -1.3740 -1.3723 | 0.45240 0.44508 0.42590 0.31090 0.62470 |

Figure 2.8 Matrices for a least-squares solution.

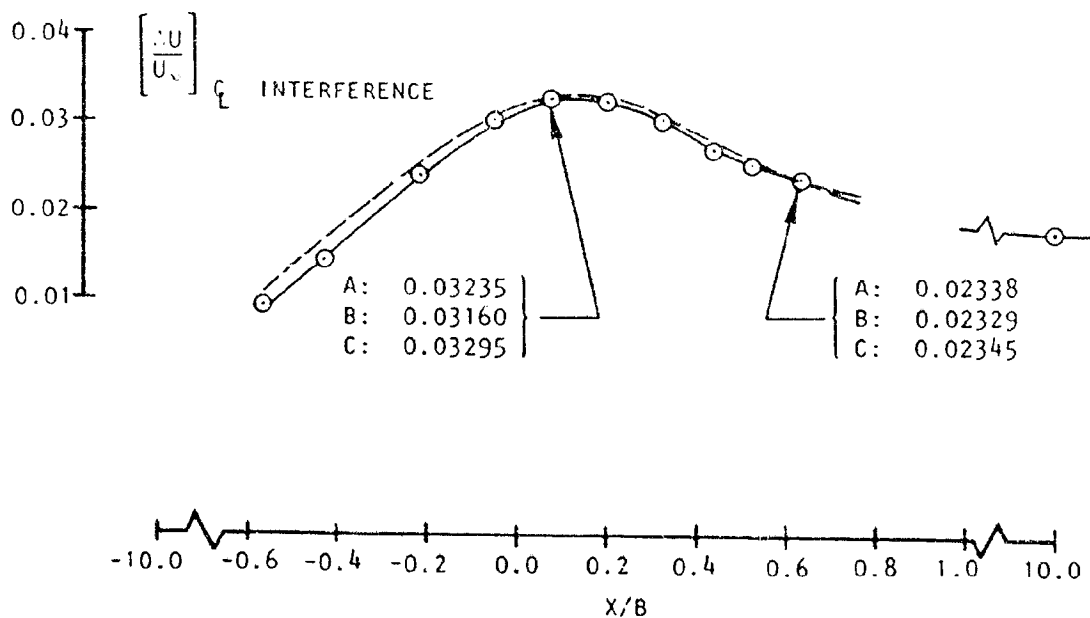
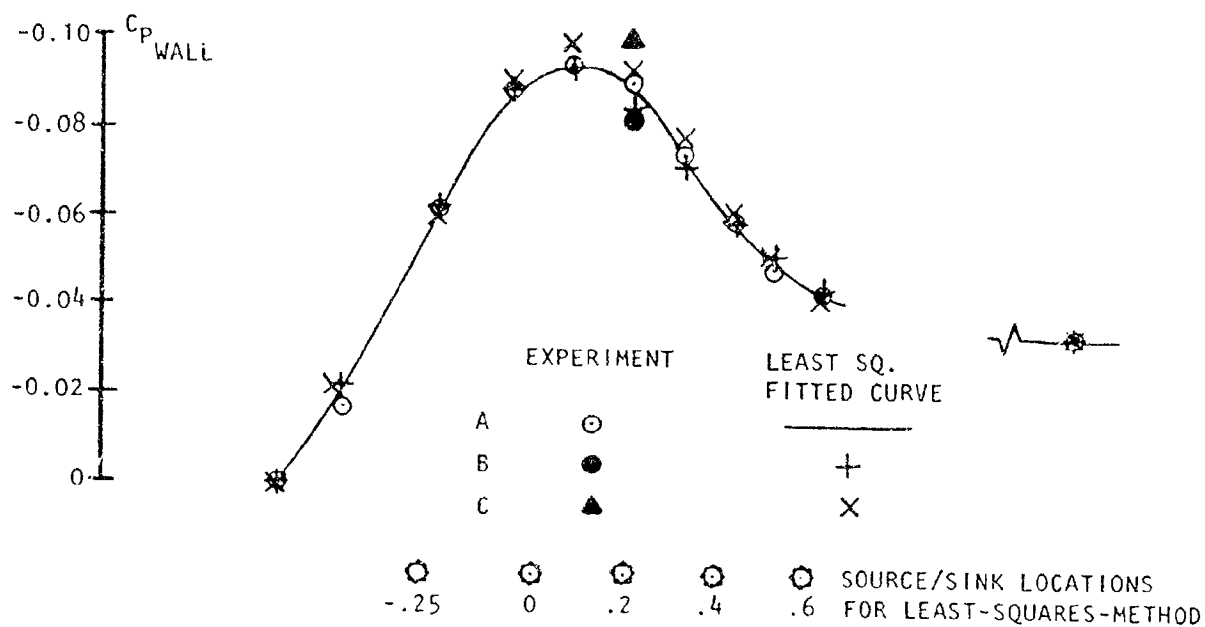


Figure 2.9 Application of the "Least-Squares" Approach to "noisy" Data (SAS Car Model in 16½' x 23½' Tunnel)

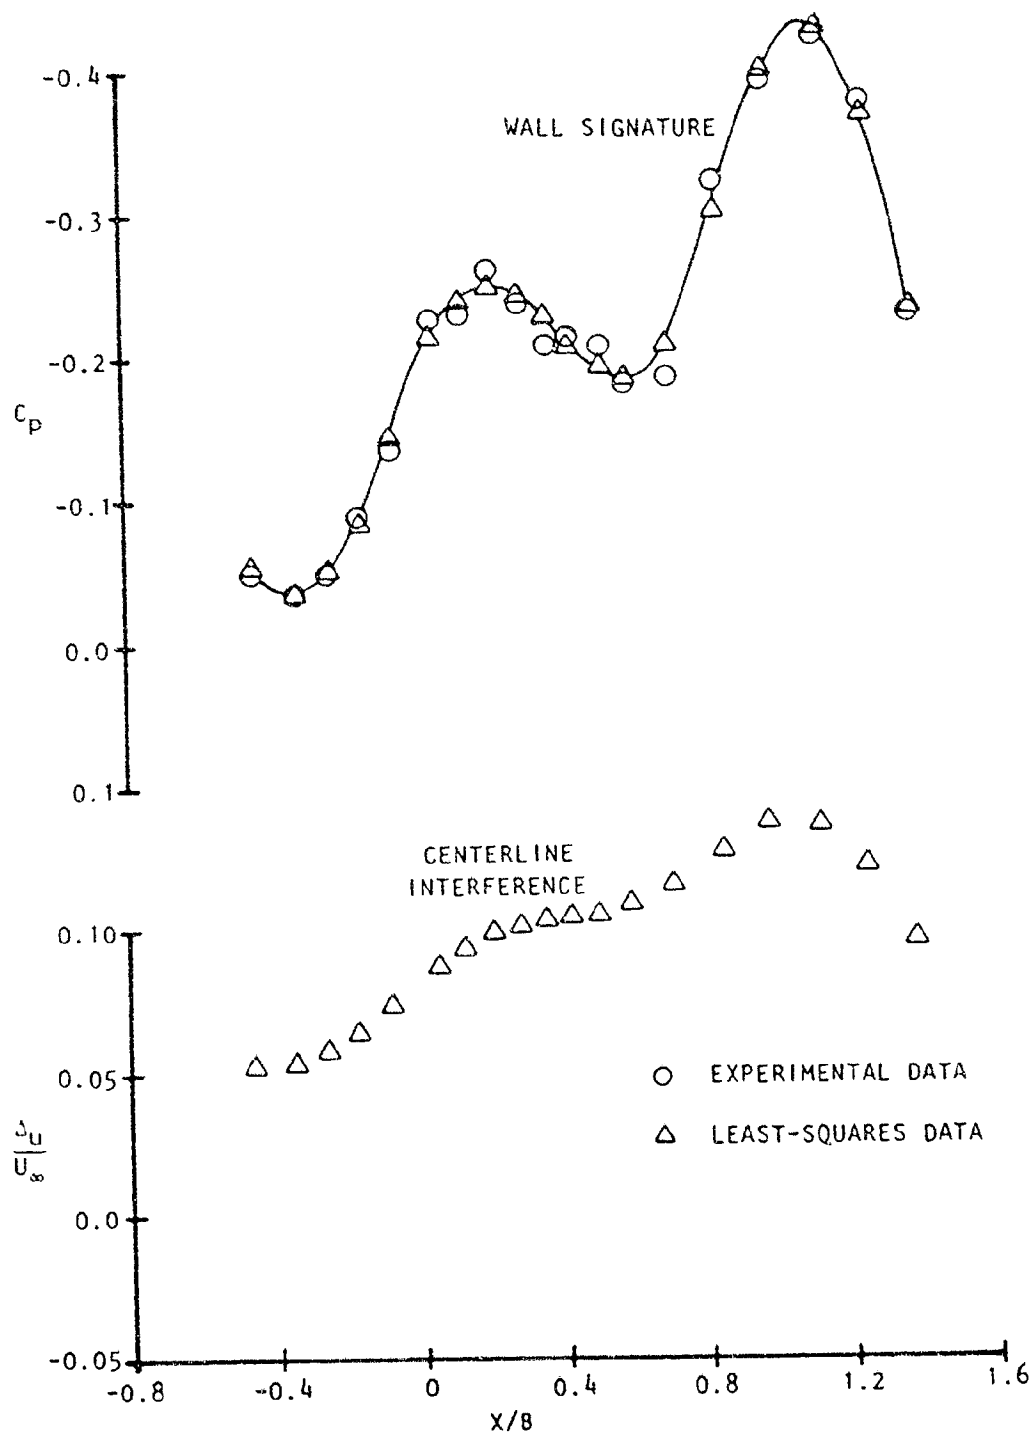


Figure 2.10 Application of least-squares approach to a complex signature (knee-blown flap model, at high C_u and angle-of-attack in the 30" x 43" tunnel).

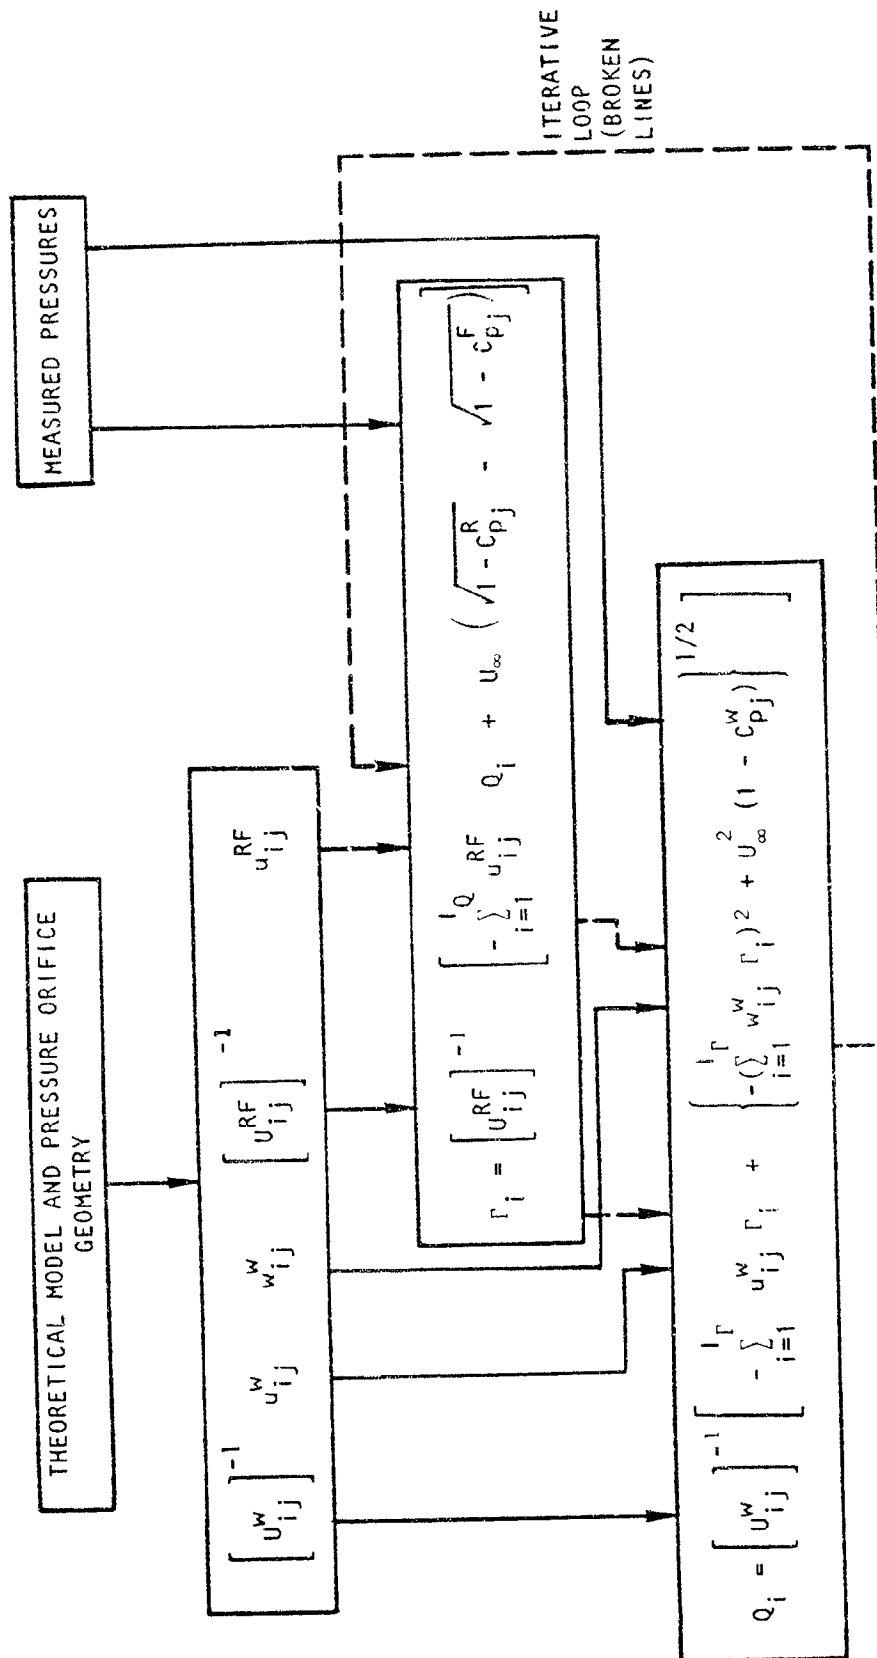


Figure 2.11 Iterative scheme for solving equations 3 and 4

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

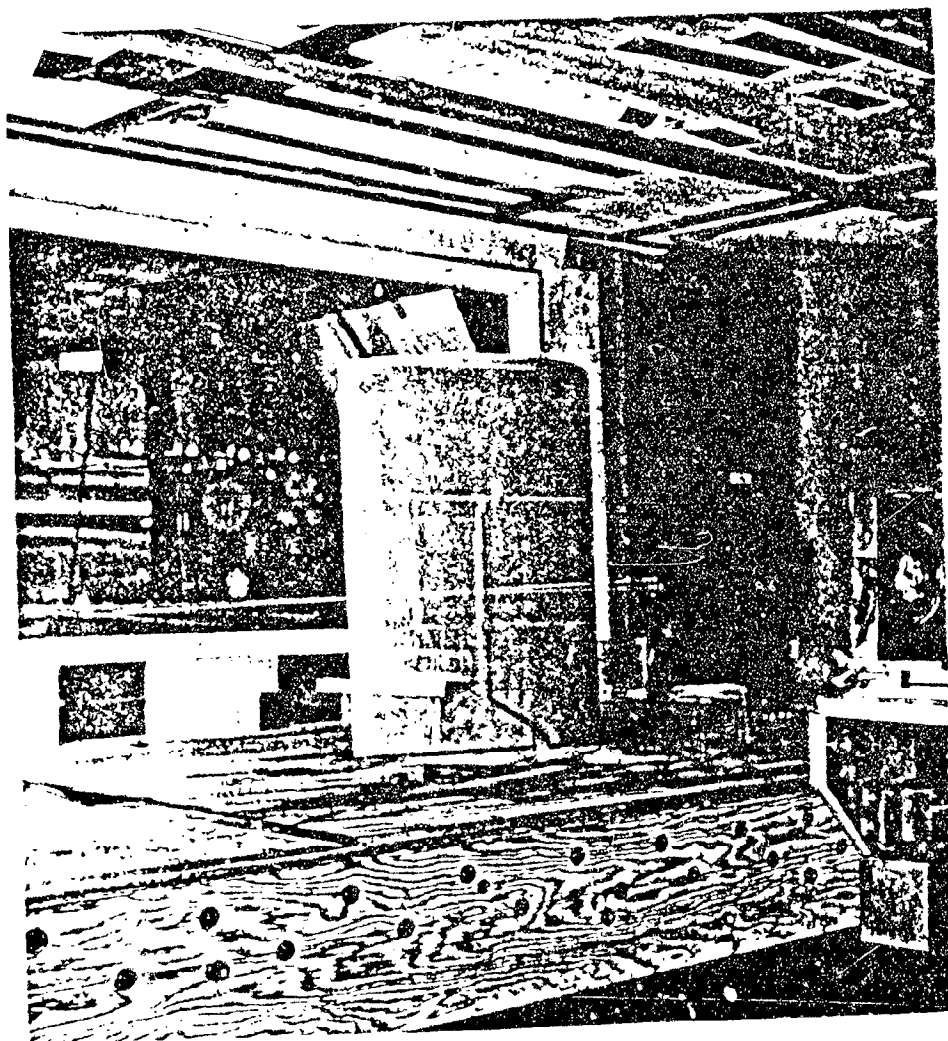


Figure 3.1 18-inch semispan, 12-inch chord half wing model in the 30" X 43" wind tunnel.



Figure 3.2 basic swept arc-blow flap model in the 50" X 43" test section (view through the LV window from the 'back' platform).

ORIGINAL PAGE
BLACK AND WHITE PHOTOGRAPH

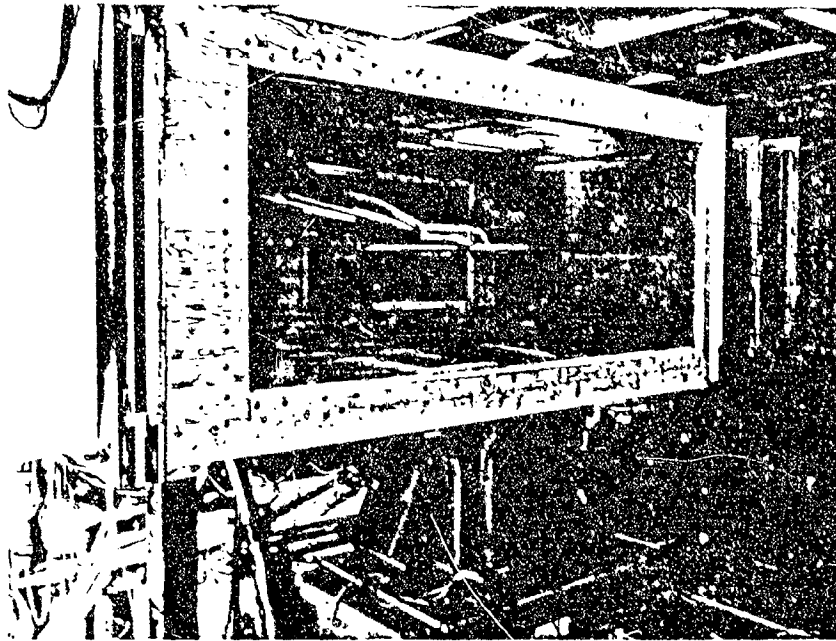


Figure 3.2(a) Continued



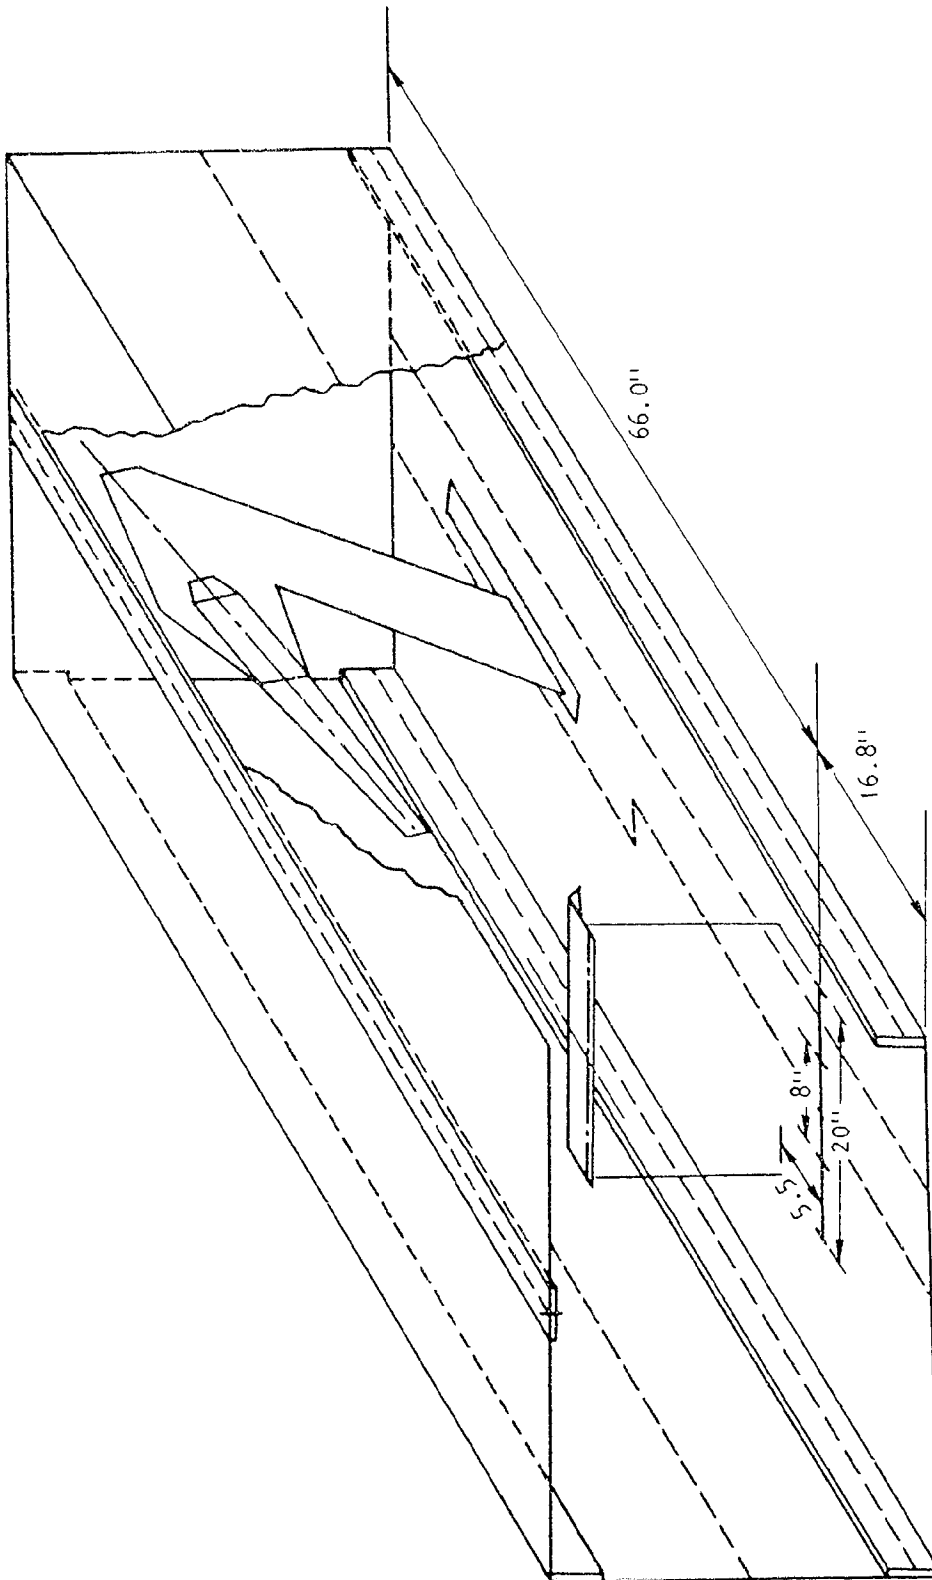


Figure 3.3 Model, sting and instrumentation layout in the 30" X 43" wind tunnel.

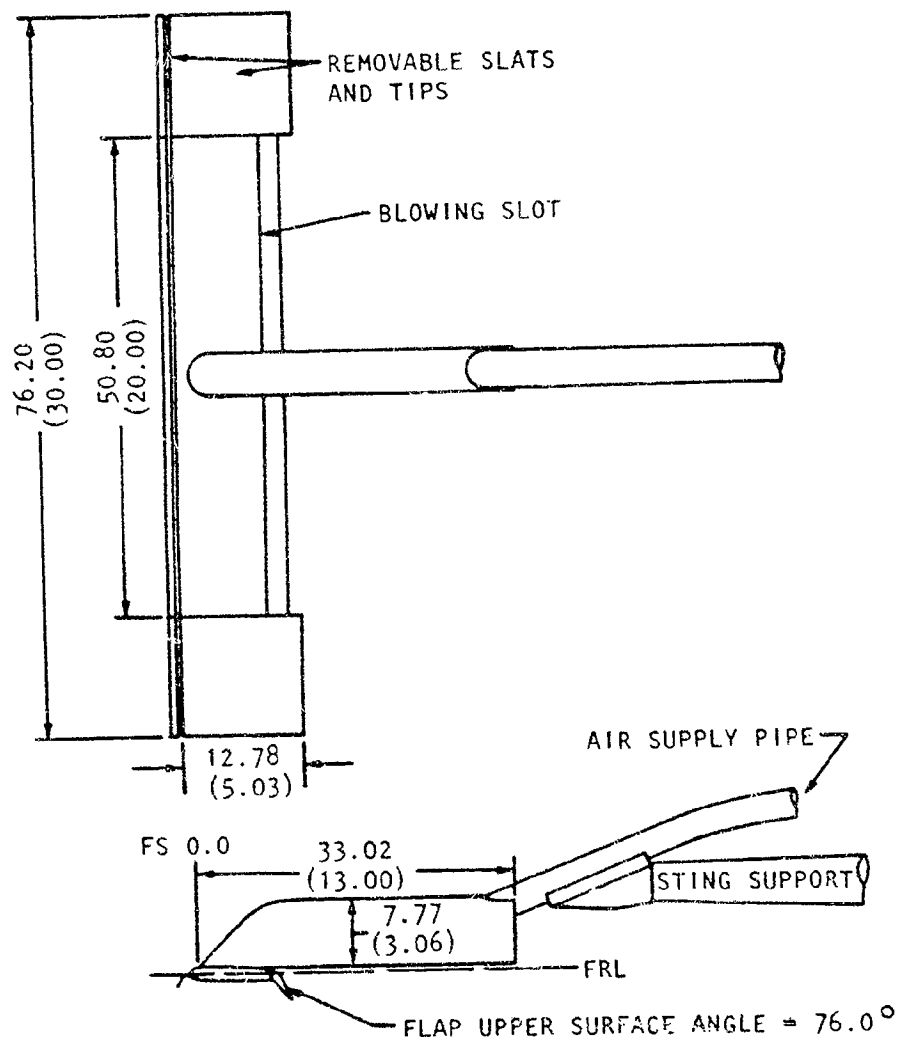


DIMENSIONS SHOWN IN INCHES (CENTIMETERS)

Figure 3.4. Principal Dimensions of the Unswept Knee-Blown Flap Model

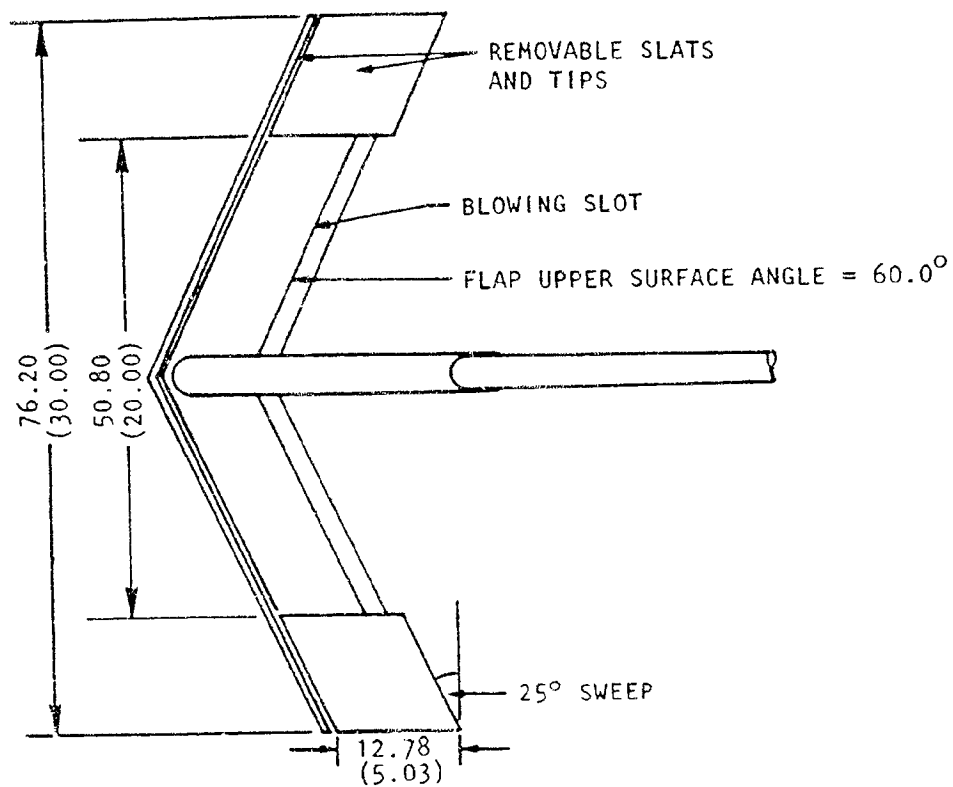


NOTE: SIDE VIEW IS SIMILAR TO UNSWEPT MODEL, FIGURE 3.4

Figure 3.5 Principal Dimensions of the Swept Knee-Blown Flap Model

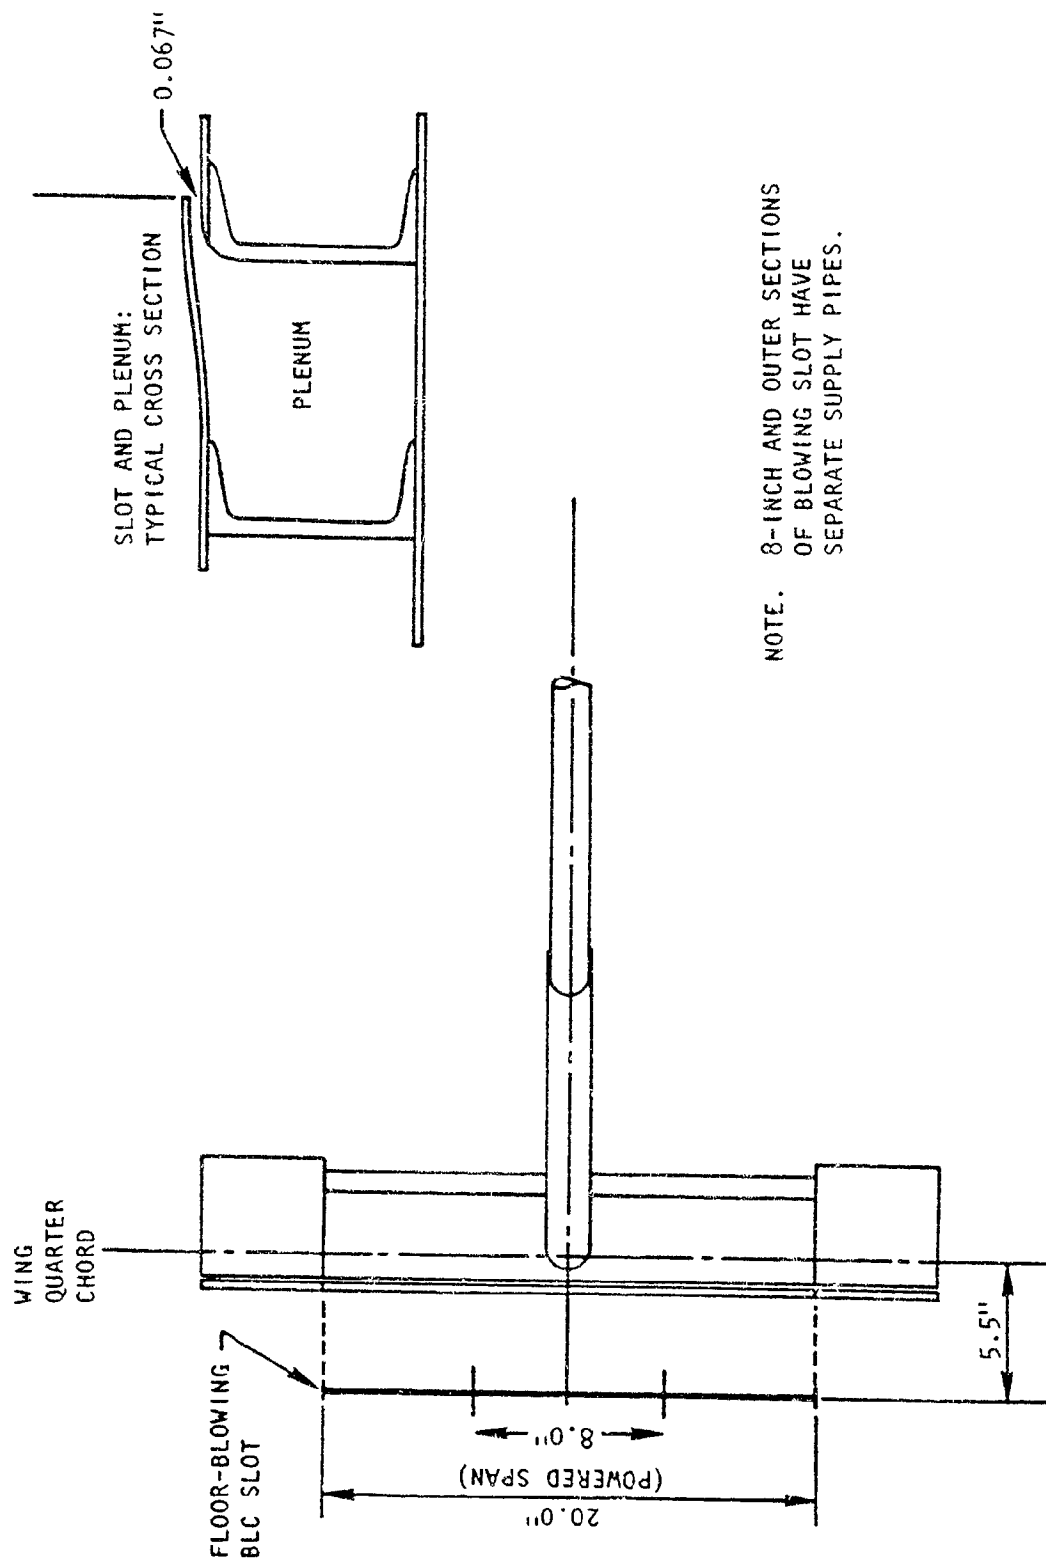

NOTE. 8-INCH AND OUTER SECTIONS
OF BLOWING SLOT HAVE
SEPARATE SUPPLY PIPES.

Figure 3.6 The Floor-Blowing BLC Slot

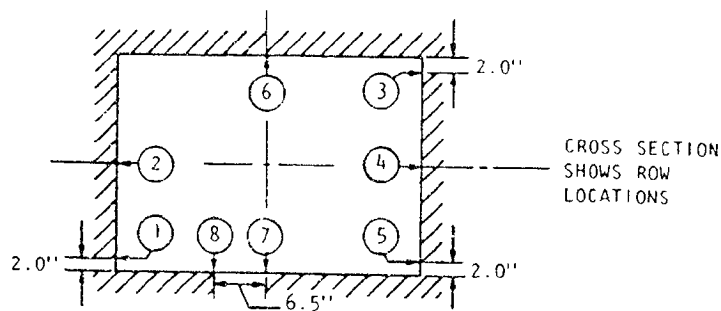

| # | ROWS 1 THRU 6 | # | ROW 7 | # | ROW 8 |
|----|------------------|-----|----------|----|----------|
| 1 | -0.814 | 1 | -0.814 | 1 | -0.814 |
| 2 | -0.465 | 2 | -0.514 | 2 | -0.514 |
| 3 | -0.372 | 3 | -0.426 | 3 | -0.426 |
| 4 | -0.279 | 4 | -0.333 | 4 | -0.333 |
| 5 | -0.186 | 5 | -0.237 | 5 | -0.237 |
| 6 | -0.093 | 6 | -0.144 | 6 | -0.144 |
| 7 | 0.000 | 7 | -0.051 | 7 | -0.051 |
| | | 8 | +0.019 | | |
| 8 | 0.070 | 9 | 0.042 | 8 | 0.042 |
| | | 10 | 0.065 | | |
| 9 | 0.140 | 11 | 0.088 | 9 | 0.088 |
| | | 12 | 0.112 | | |
| 10 | 0.209 | 13 | 0.158 | 10 | 0.158 |
| 11 | 0.279 | 14 | 0.209 | 11 | 0.209 |
| | | 15 | 0.251 | 12 | 0.251 |
| 12 | 0.349 | 16 | 0.298 | 13 | 0.298 |
| 13 | 0.419 | 17 | 0.349 | 14 | 0.349 |
| 14 | 0.488 | 18 | 0.419 | 15 | 0.419 |
| 15 | 0.587 | 19 | 0.488 | 16 | 0.488 |
| 16 | 0.698 | 20* | 0.558 | 17 | 0.558 |
| 17 | 0.837 | 21* | 0.698 | 18 | 0.698 |
| 18 | 0.977 | 22* | 0.837 | 19 | 0.837 |
| 19 | 1.116 | 23* | 0.977 | 20 | 0.977 |
| 20 | 1.256 | 24* | 1.116 | 21 | 1.116 |
| 21 | 1.395 | 25* | 1.256 | 22 | 1.256 |
| | | 26* | 1.395 | 23 | 1.395 |

← TUNNEL REFERENCE
STATIC

TABLE SHOWS
X/B VALUES

(B = 43.0")

*OFFSET 3.5" RIGHT TO AVOID STING

Figure 3.7 Wall pressure orifice locations for experiments with the knee-blown flap models.

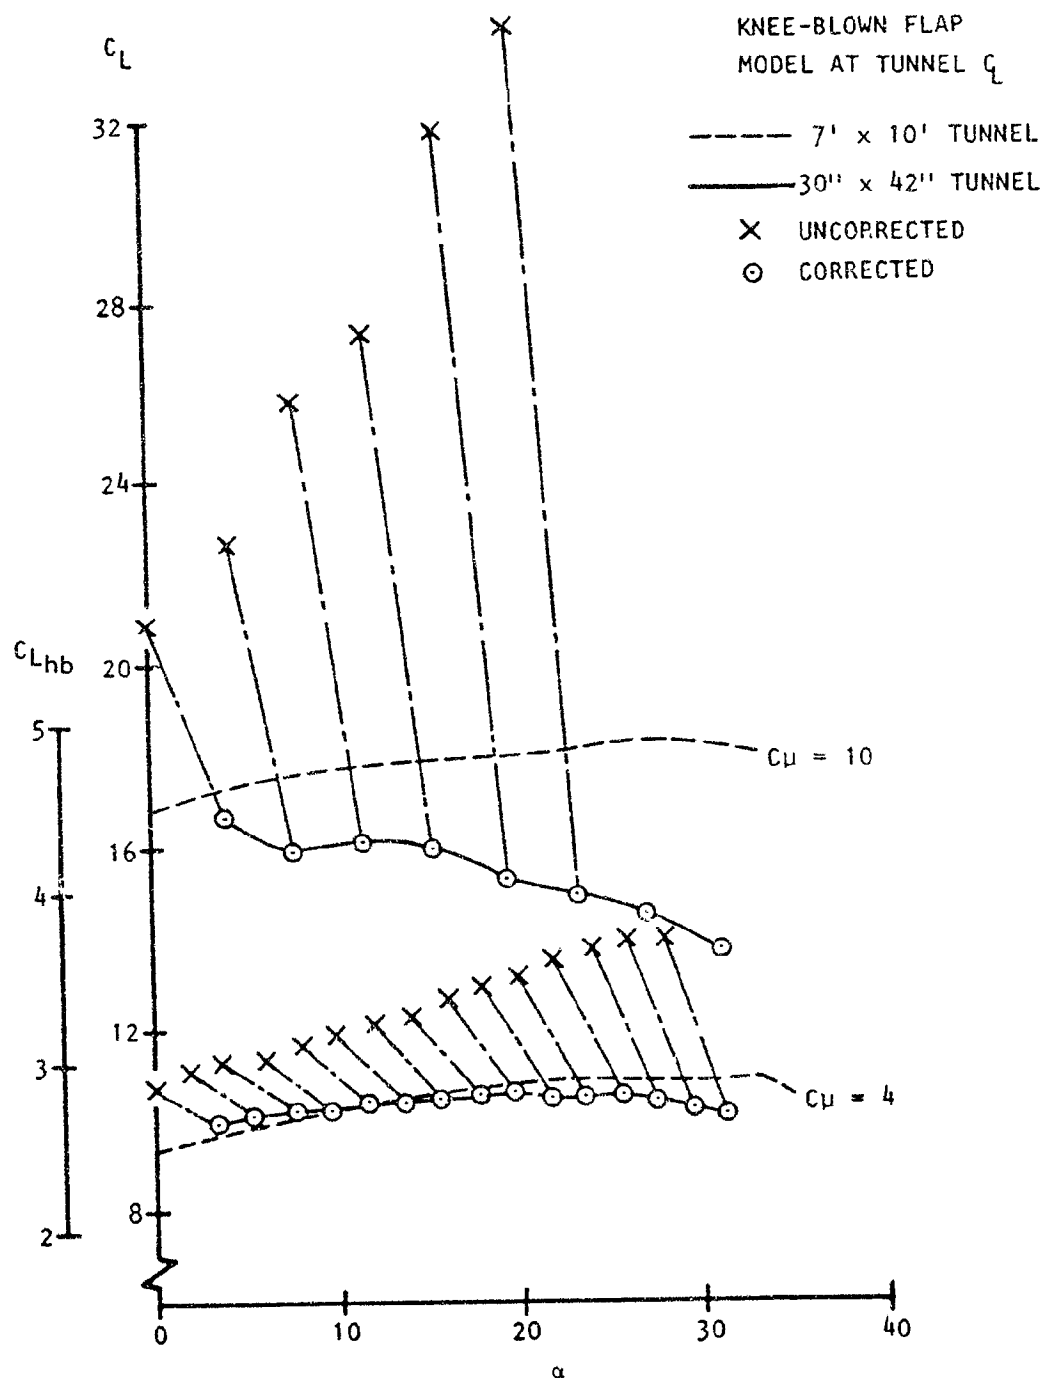


Figure 4.1 Implied corrections for "true-q" tests

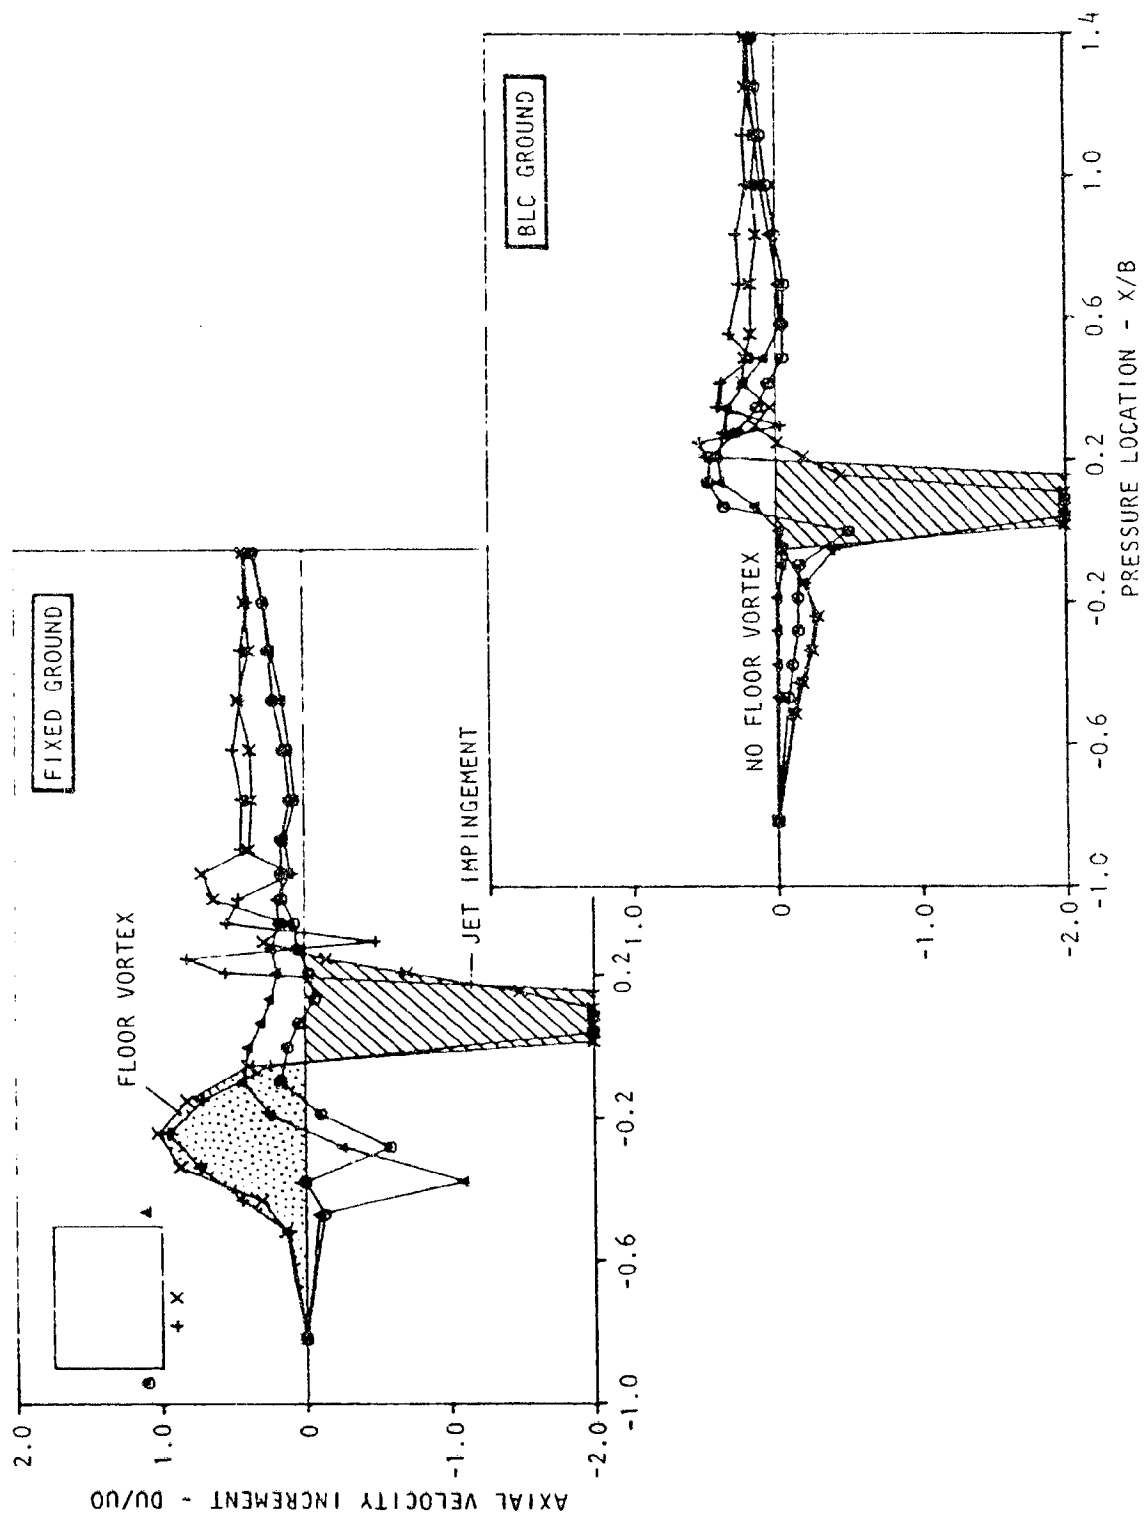


Figure 4.2 Use of ground pressures for BLC feedback

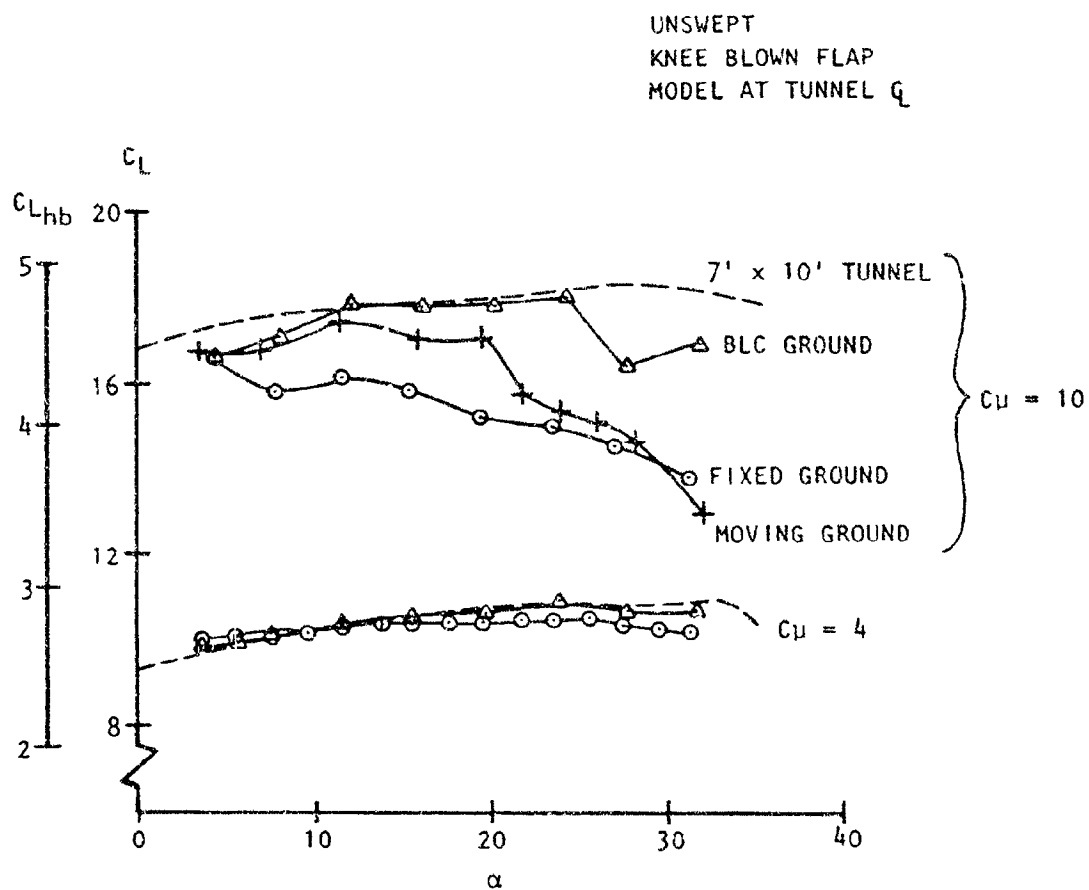


Figure 4.3 Effect of ground-blowing BLC on lift-loss due to the floor vortex

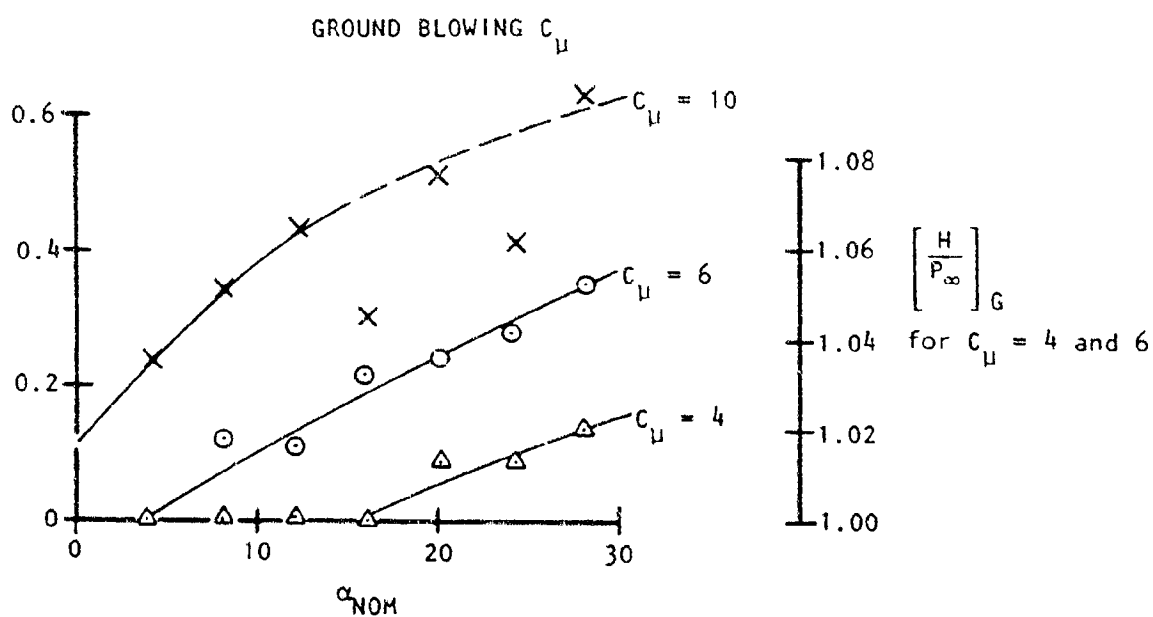
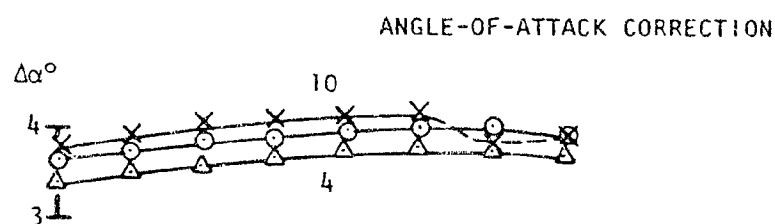
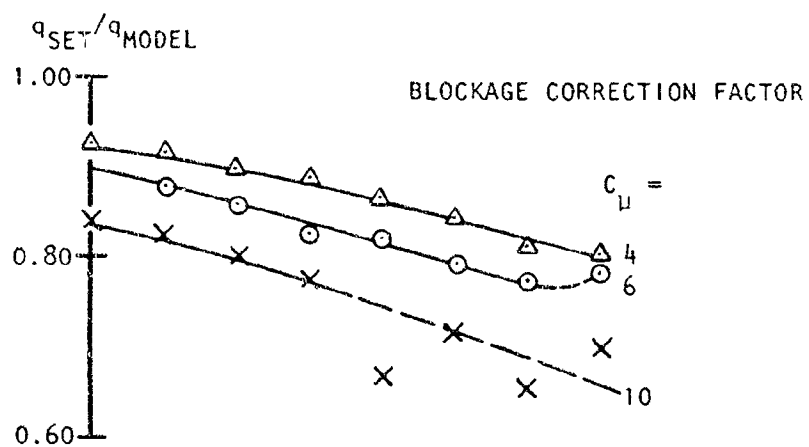


Figure 4.4 Test details for straight wing KBF runs

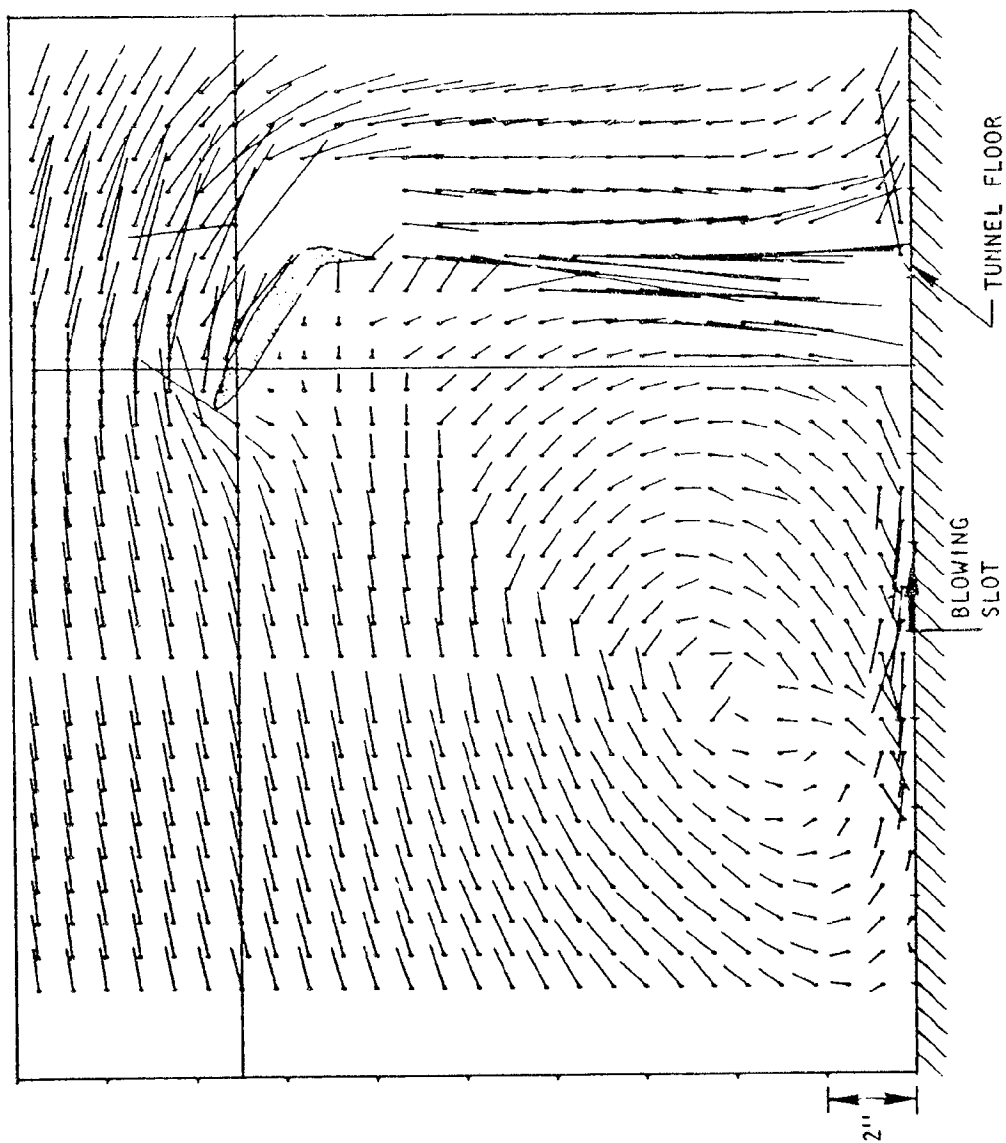


Figure 4.5 Laser velocimeter measurements of tunnel flow breakdown condition. $C_{II} = 6$, $\alpha = 28^\circ$.

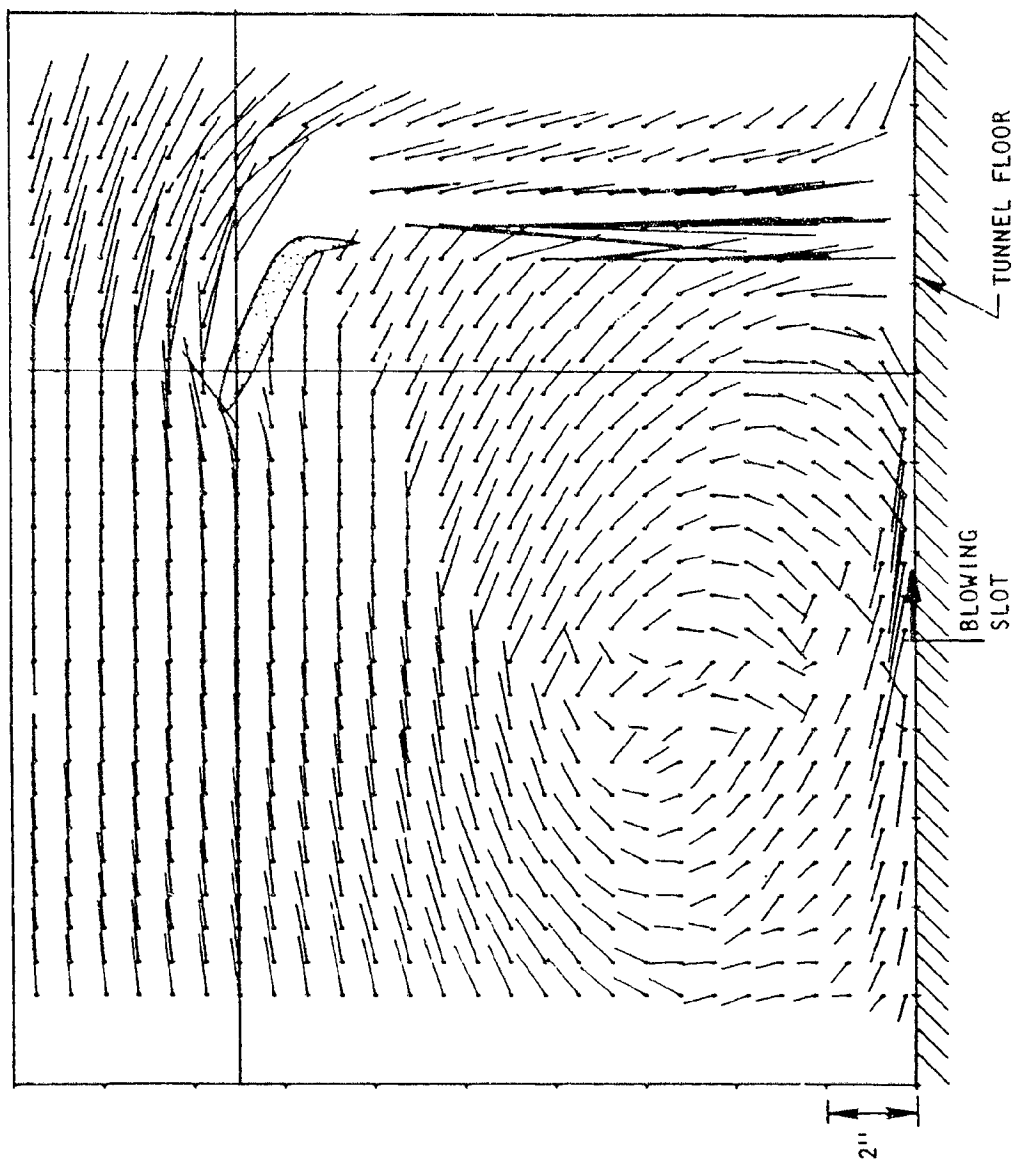


Figure 4.6 Laser velocimeter measurements of tunnel flow
breakdown condition, $C_u = 10$, $\alpha = 20^\circ$.

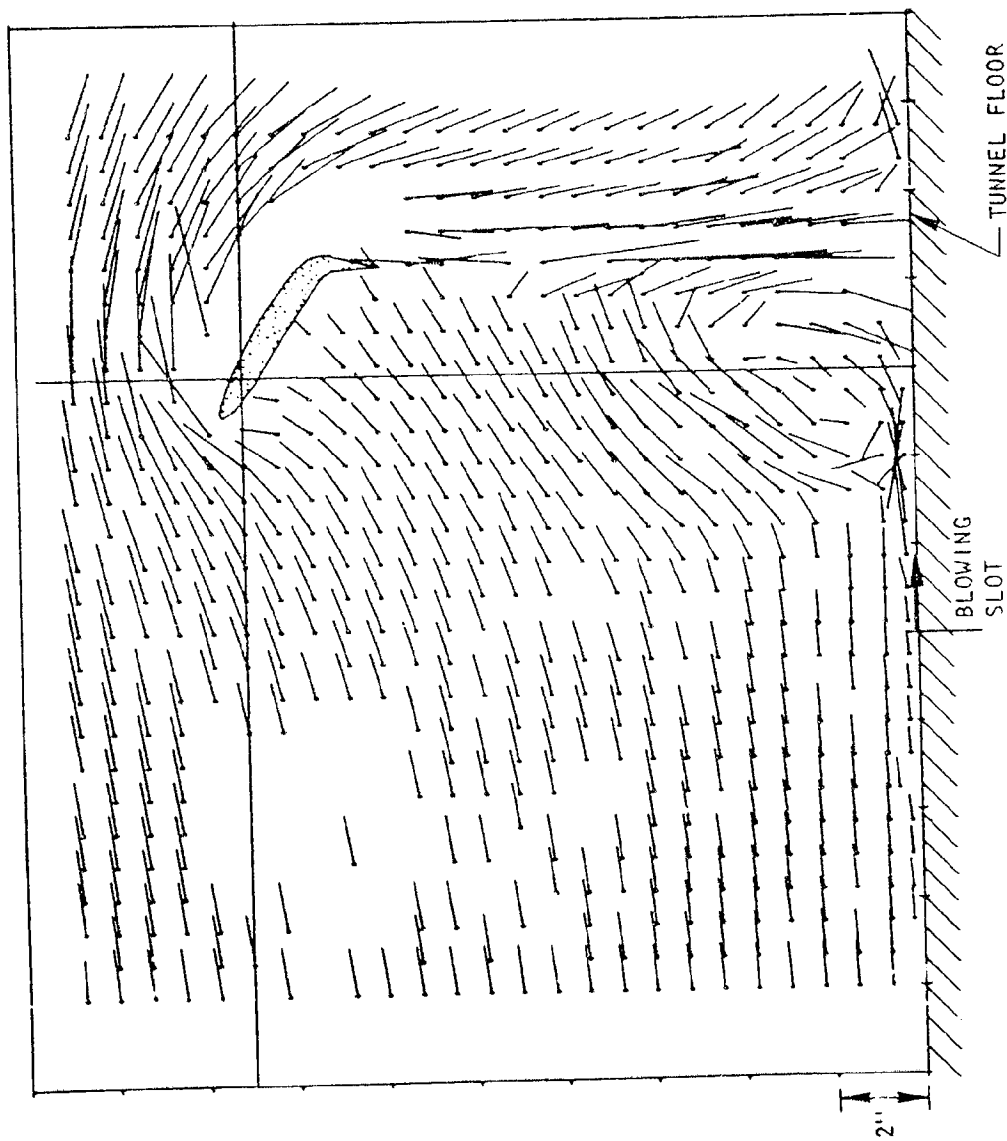


Figure 4.7. Laser Velocimeter measurements with floor blowing BLC Applied,
 $C_{bl} = 6$, $\alpha = 28^\circ$.

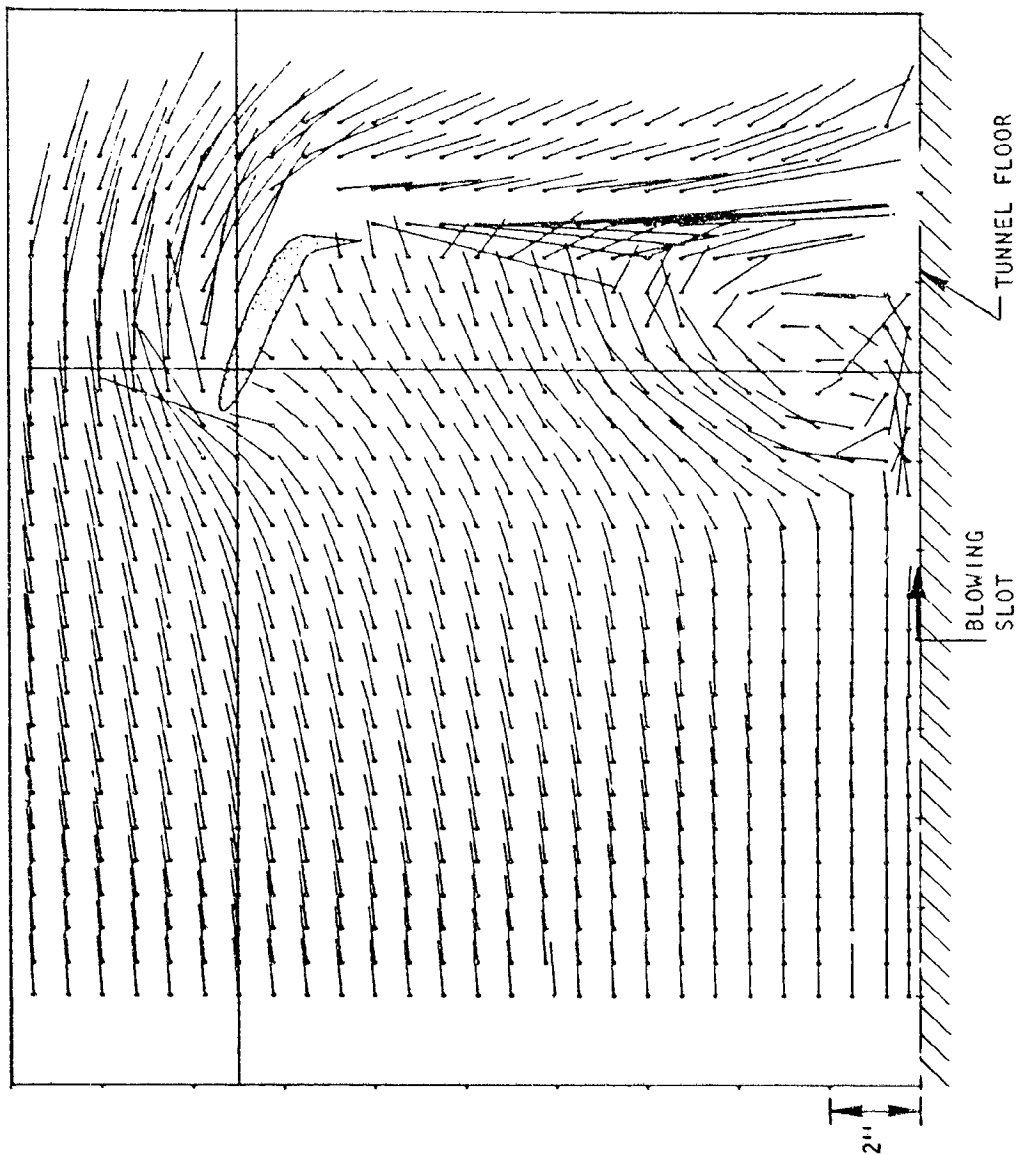


Figure 4.8. Laser Velocimeter measurements with floor blowing BLC Applied,
 $C_{\mu} = 10$, $\alpha = 20^\circ$.

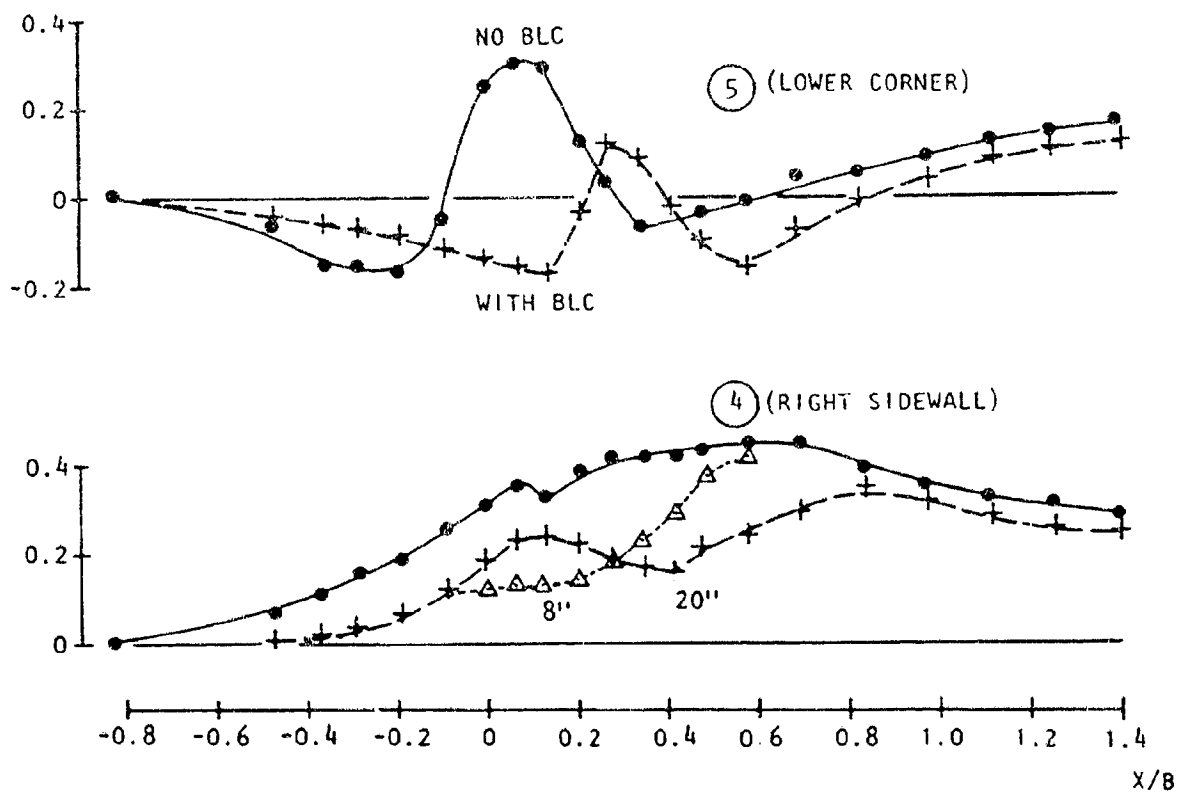
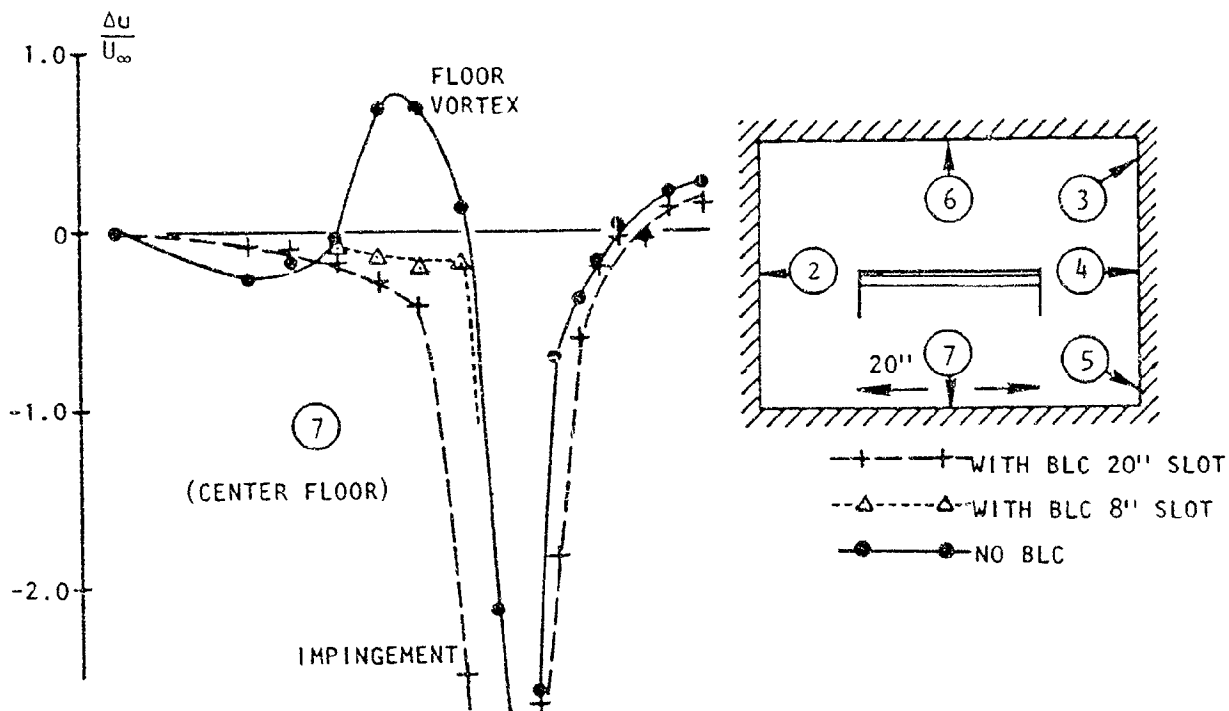


Figure 4.9 Effect of ground BLC on floor and sidewall signatures. $C_u = 6.0$ $\alpha = 28^\circ$.

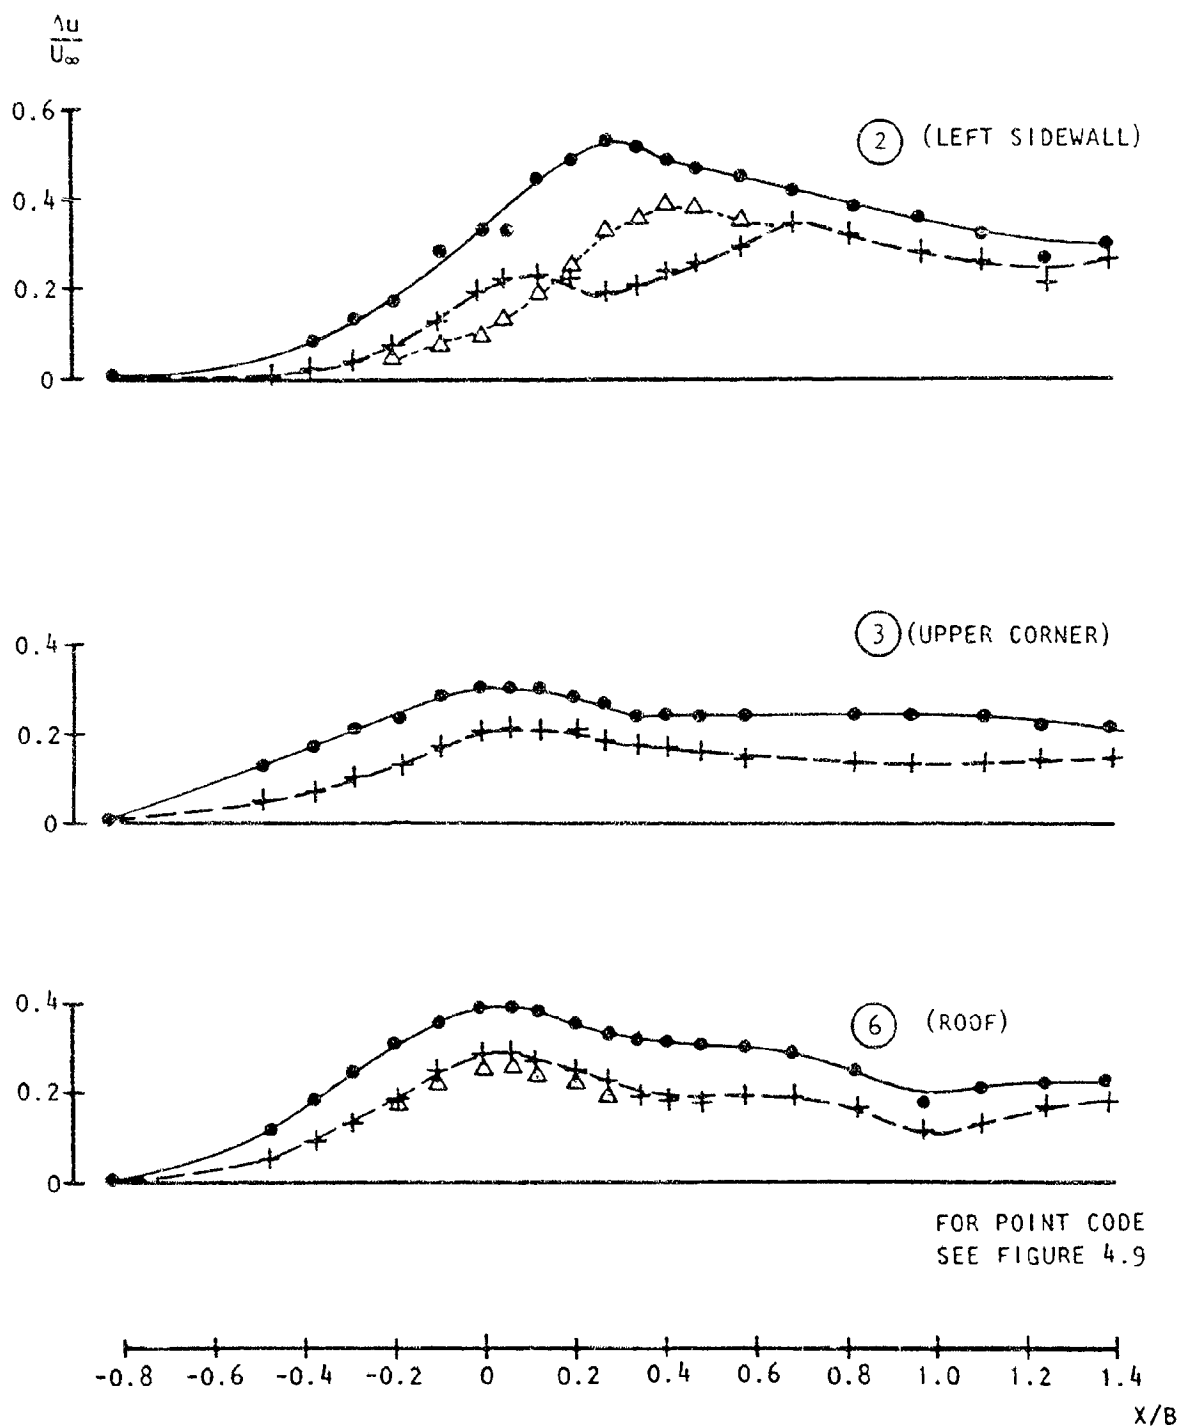


Figure 4.10 Effect of ground BLC on sidewall and roof signatures. $C_U = 6.0$ $\alpha = 28^\circ$

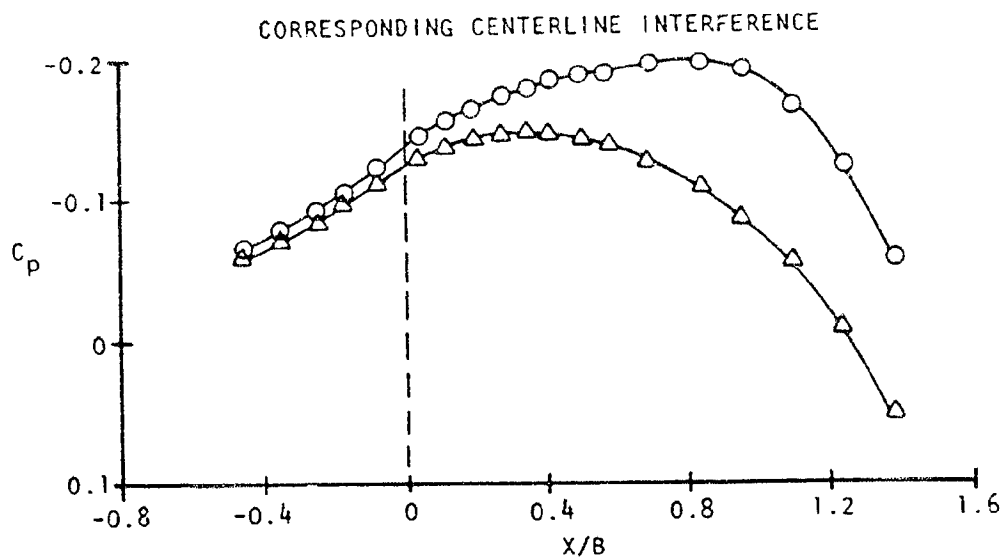
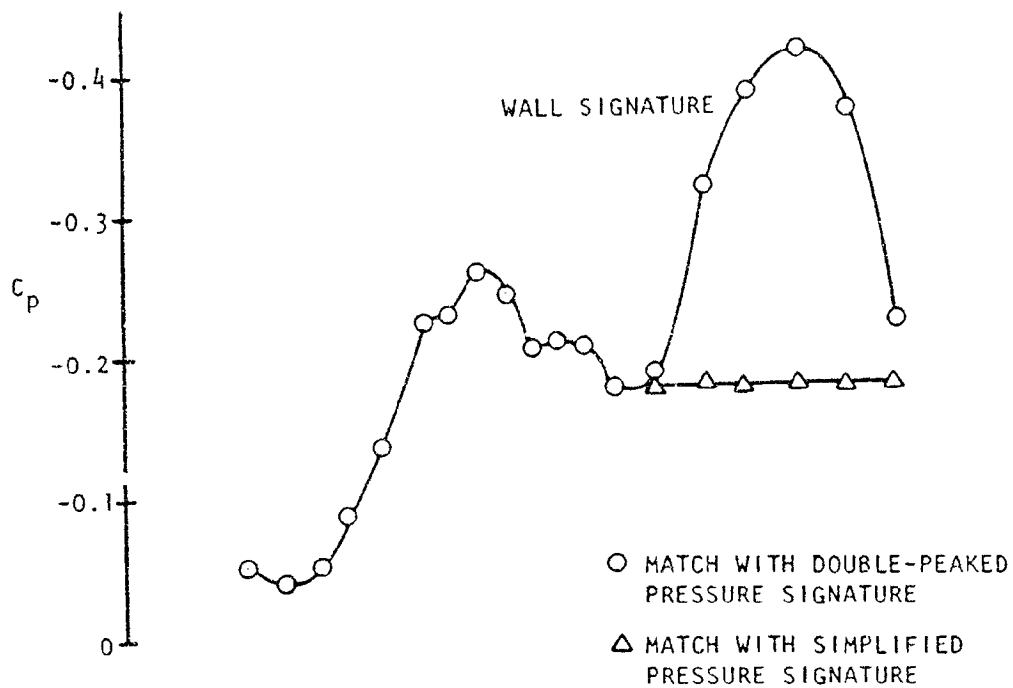


Figure 4.11 Effect of the second peak on predicted blockage. (Unswept KBF model, $C_{\mu} = 4.0$ $x = 12''$ from Figure 6.2 of Reference 8).

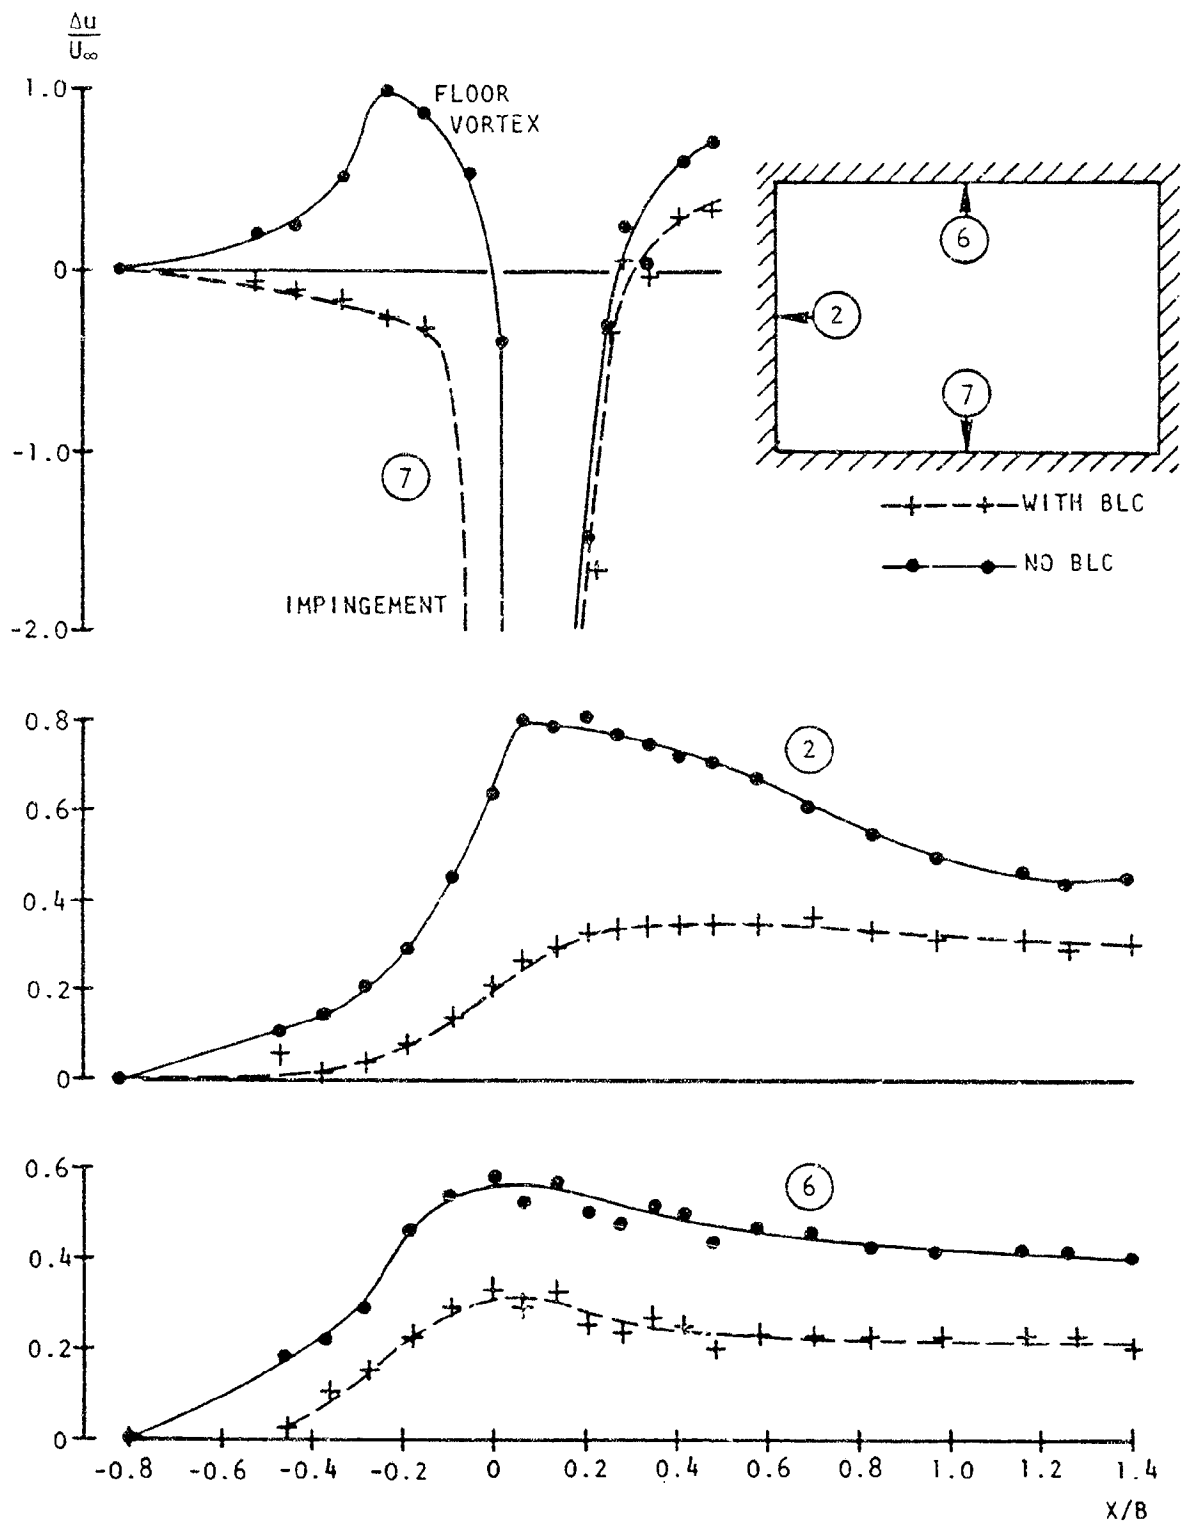


Figure 4.12 Effect of ground BLC on typical signatures
 $C_u = 10.0$ $\alpha = 20^\circ$

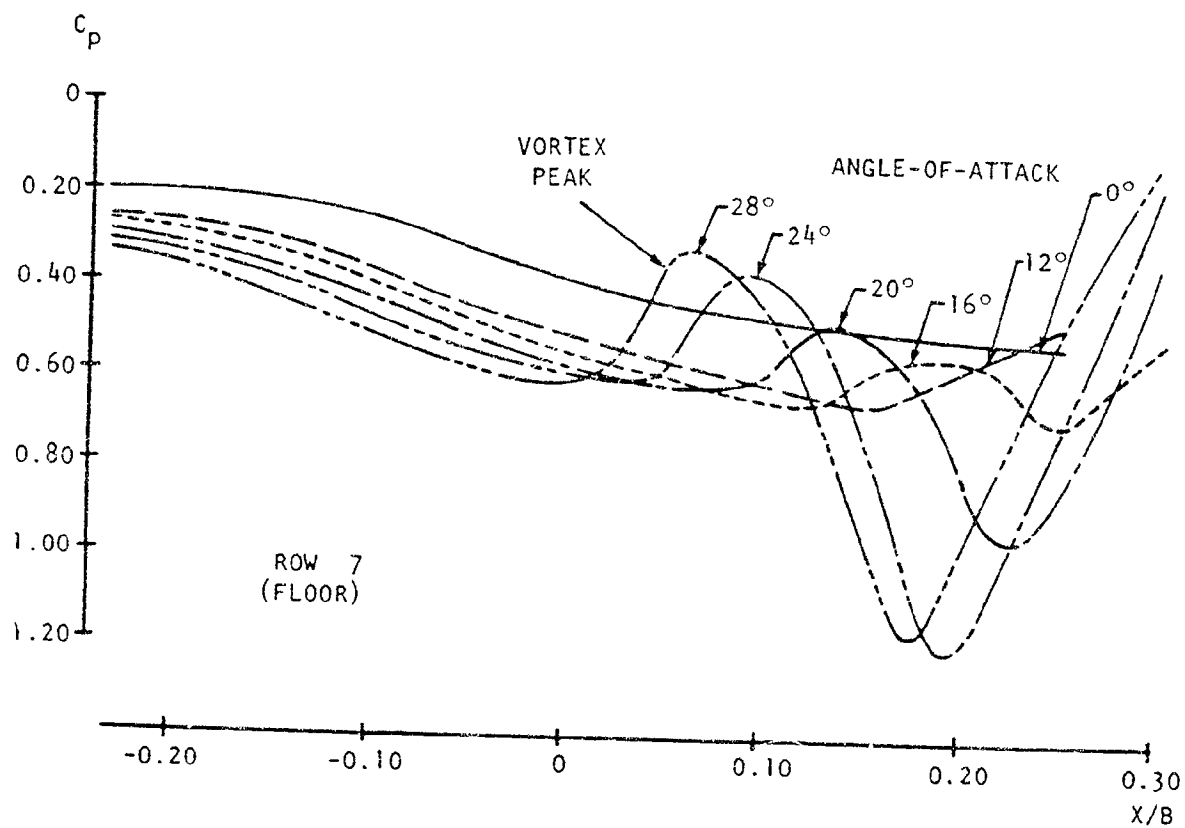


Figure 4.13 Development of floor vortex with increasing α : $C_{\mu} = 2.0$.

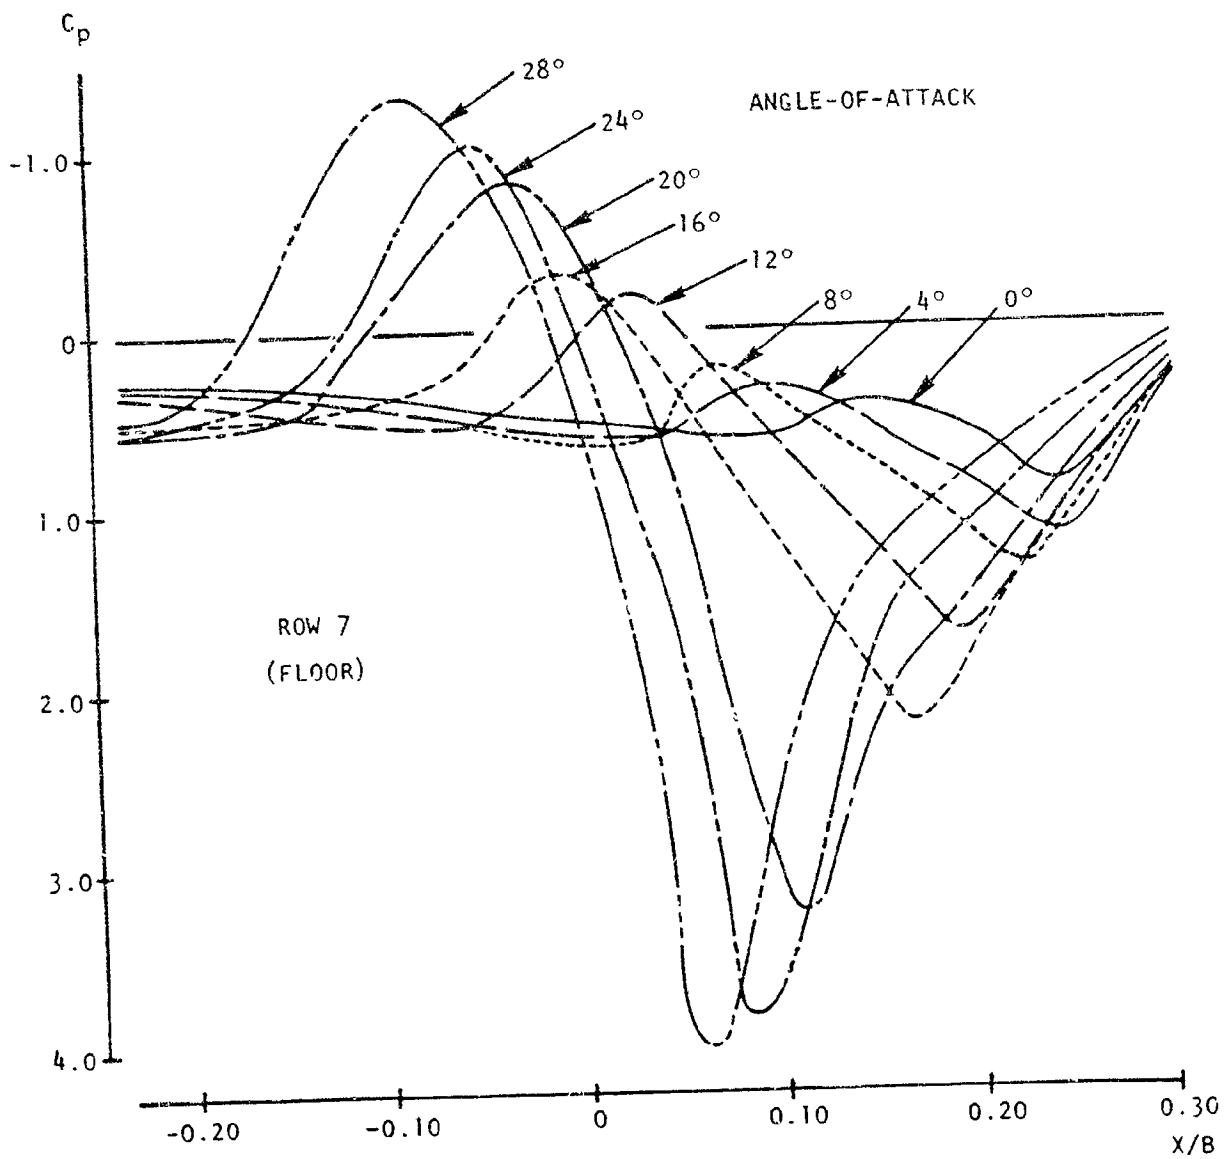


Figure 4.14 Development of floor vortex with increasing α : $C_L = 4.0$

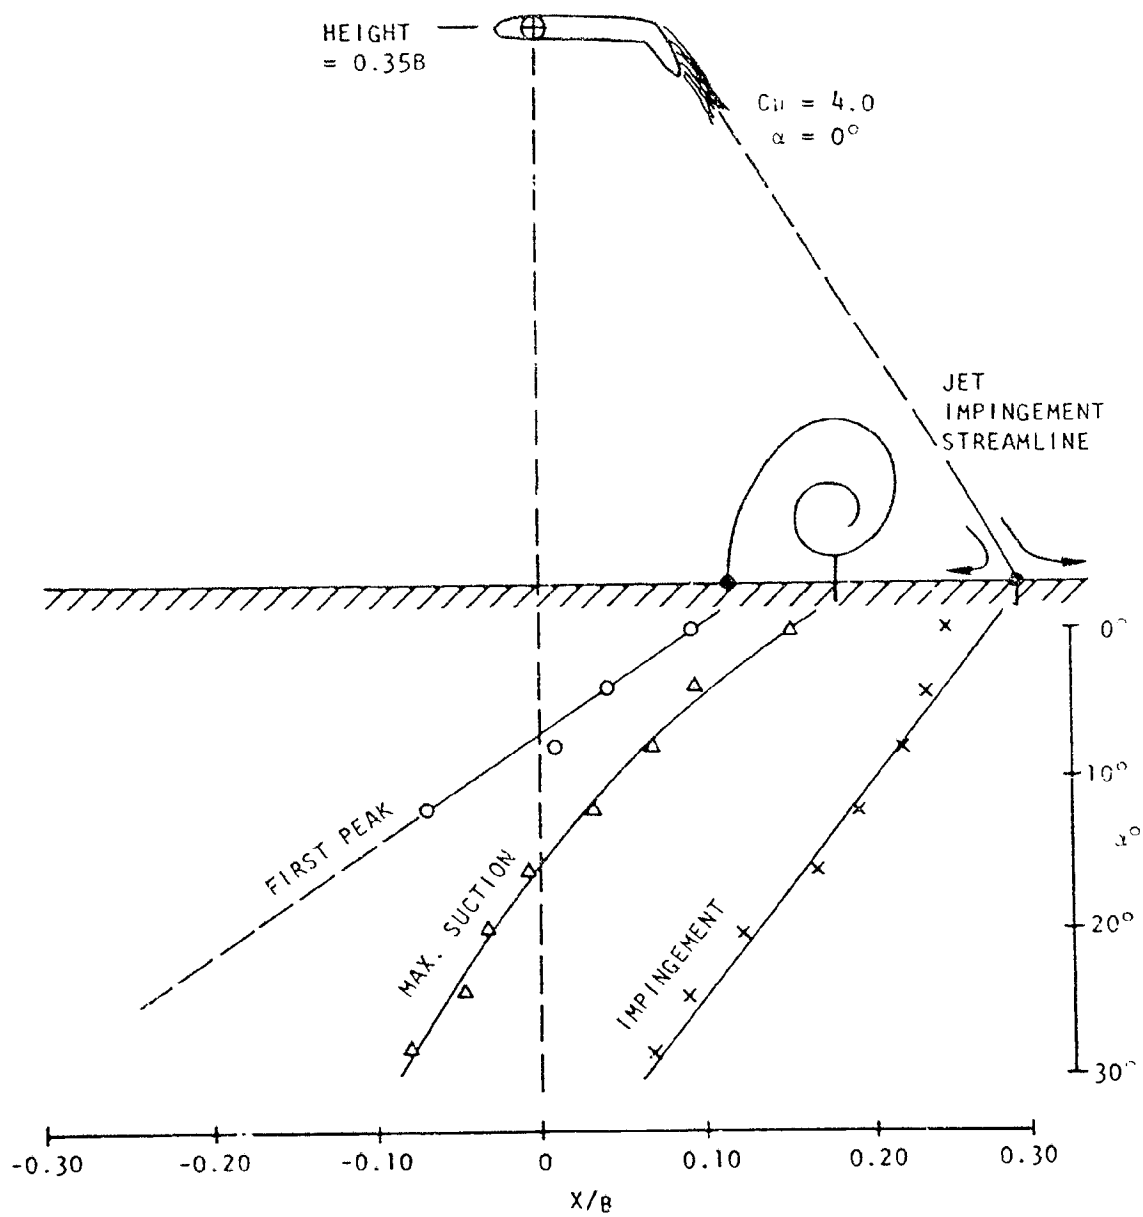


Figure 4.15 Dimensions of floor separation for $C_D = 4.0$.

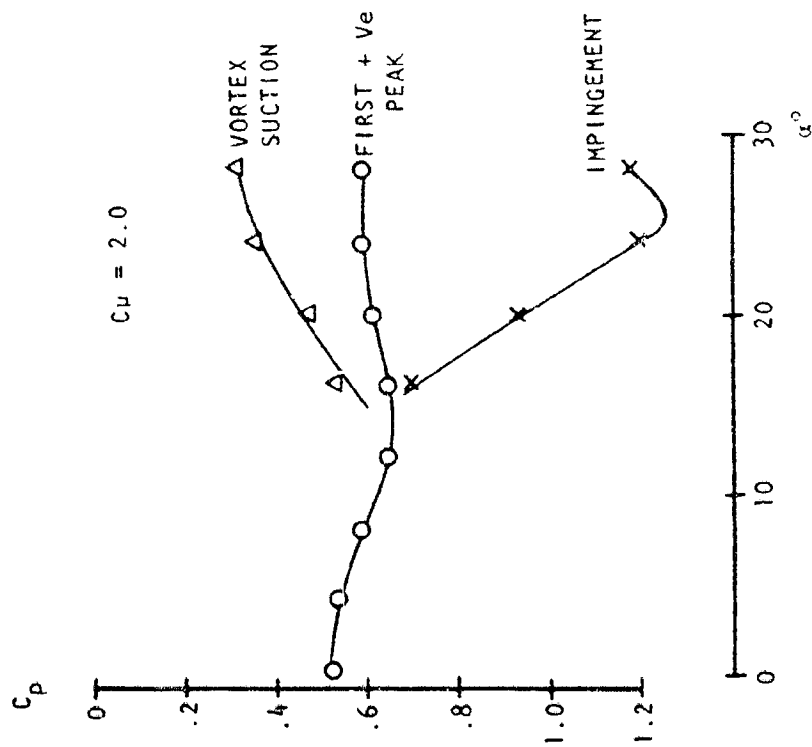
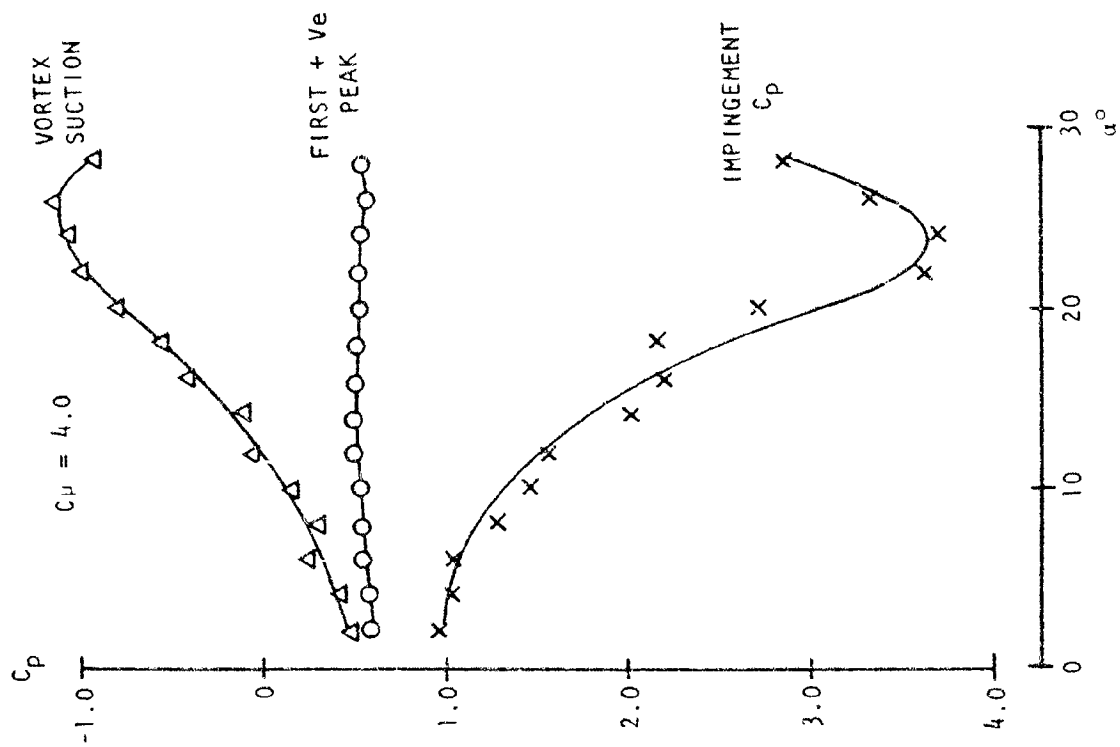


Figure 4.16 Development of floor vortex in terms of peak pressures.
(No BLC applied)

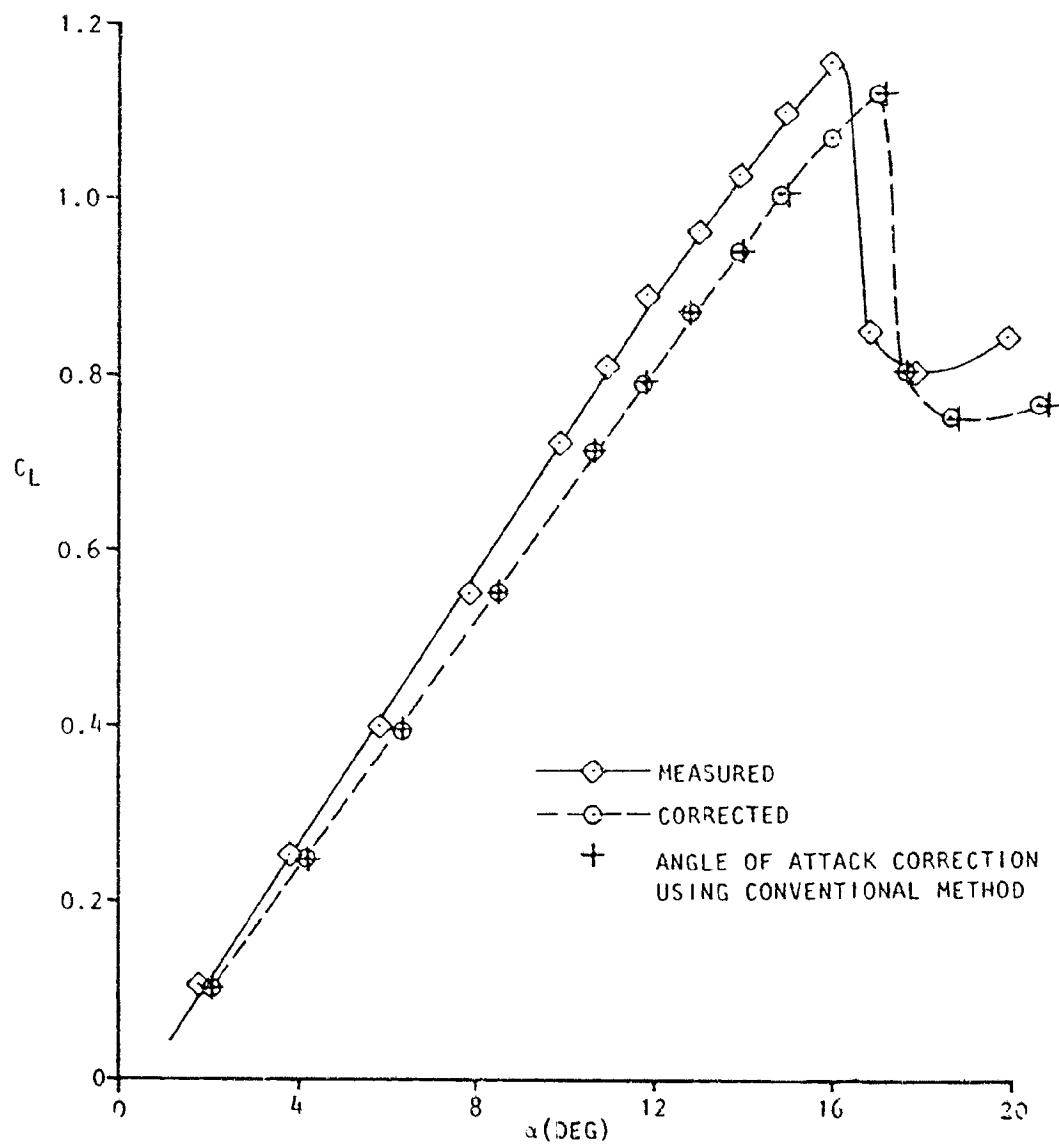


Figure 5.1 Angle-of-attack corrections for a simple wing using the wall pressure signature method

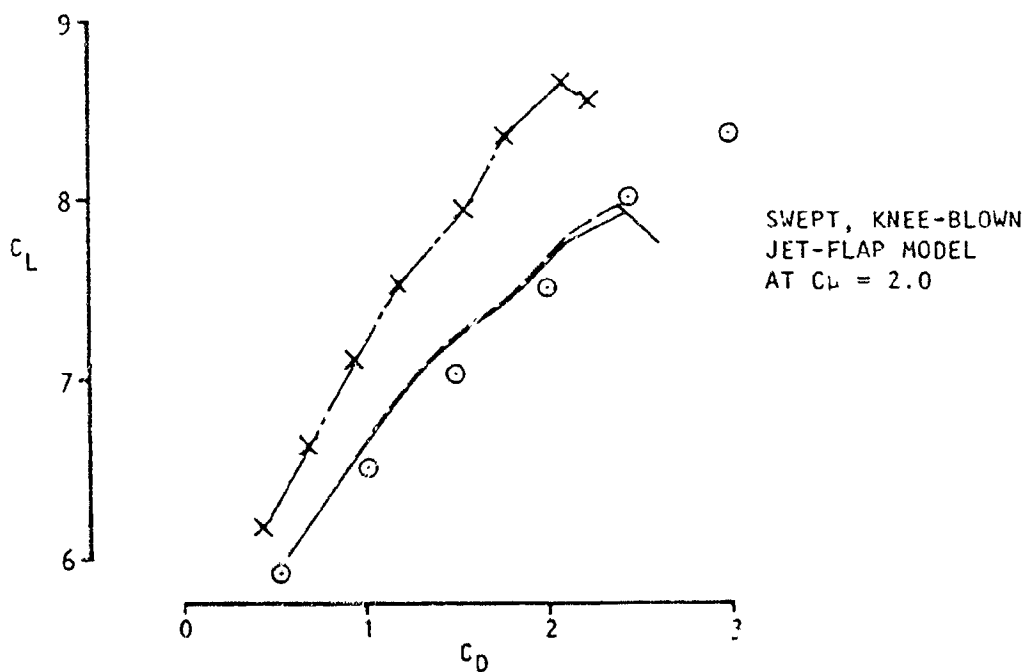
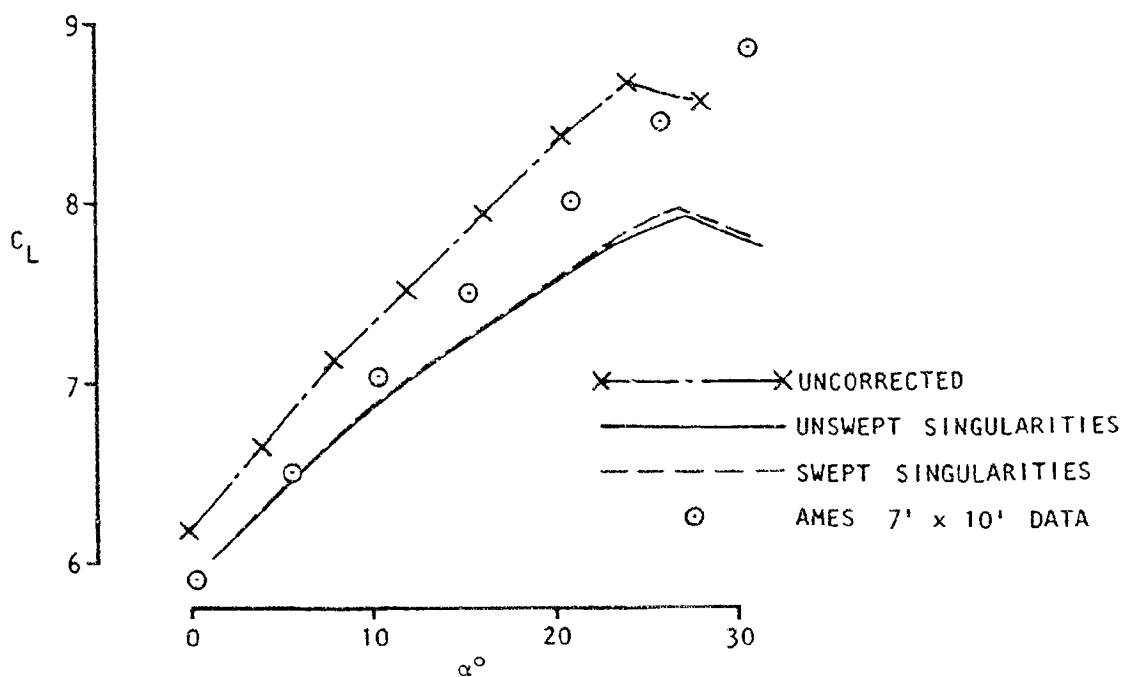


Figure 5.2 Correction of lift and drag data for the swept, knee-blown, jet-flap model.
a) Sensitivity to sweep of line singularities ("cross" effects included)

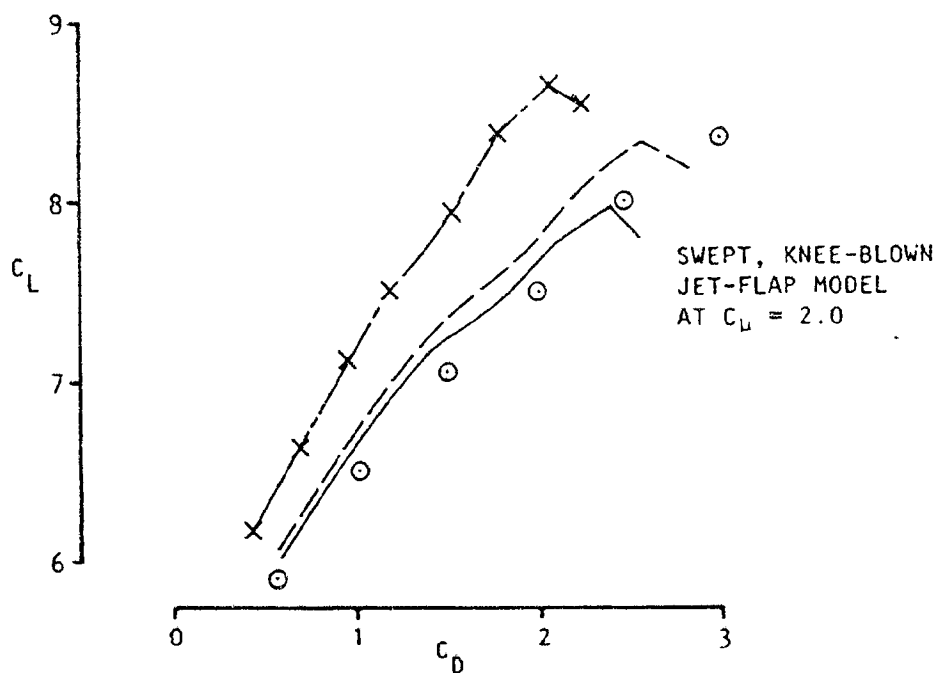
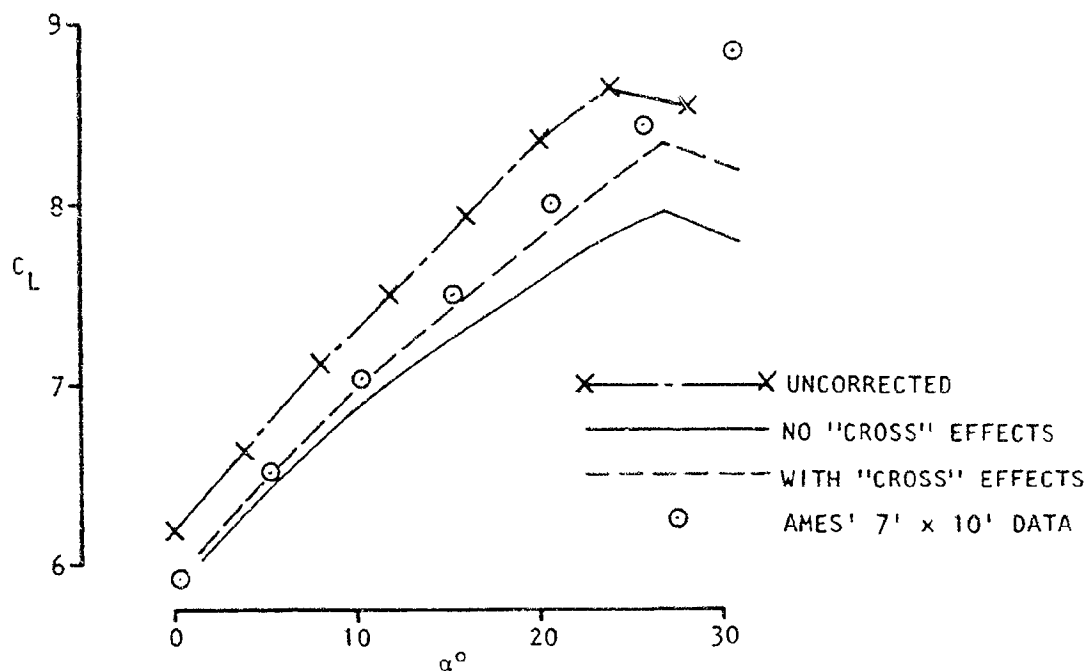


Figure 5.2 (continued) Correction of lift and drag data for swept, knee-blown, jet-flap model
 b) Sensitivity to 'cross' effects.
 (Swept singularities used set at 15° angle of attack)

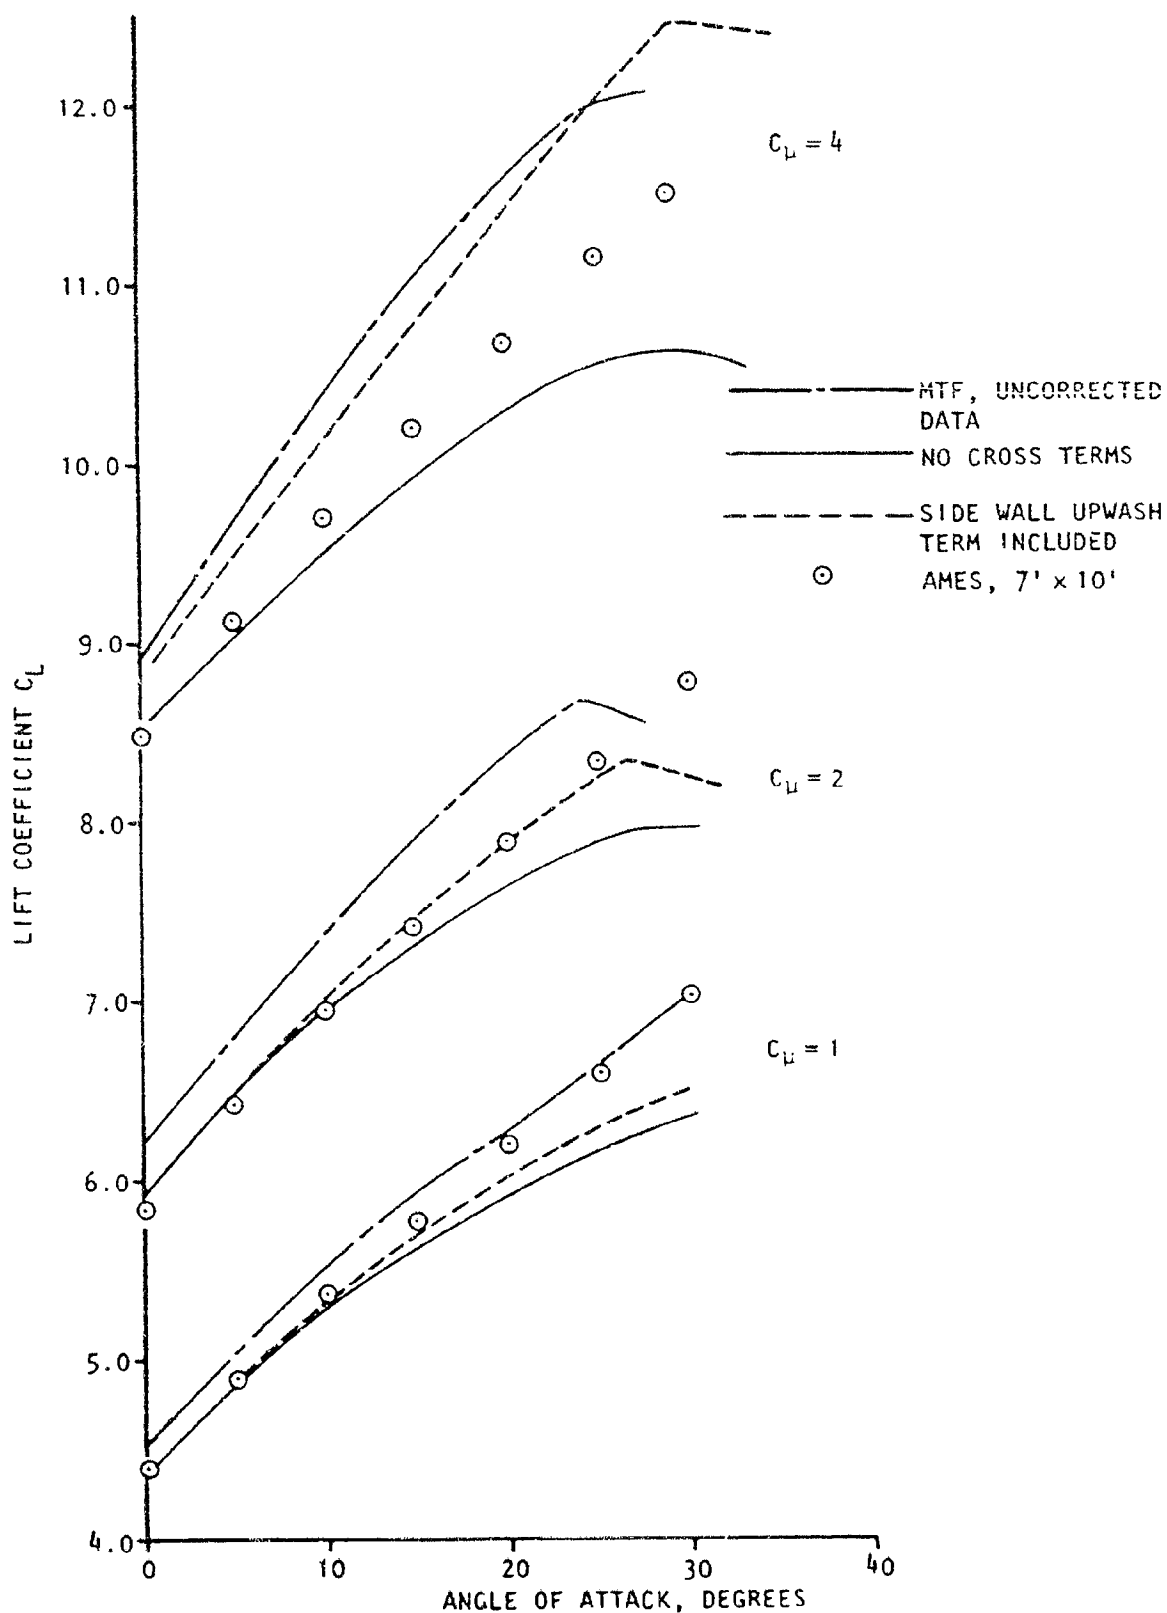


Figure 5.2 (concluded) Correction of lift and drag data for a swept, knee-blown, jet-flap model.
(c) Sensitivity to the side wall upwash term.

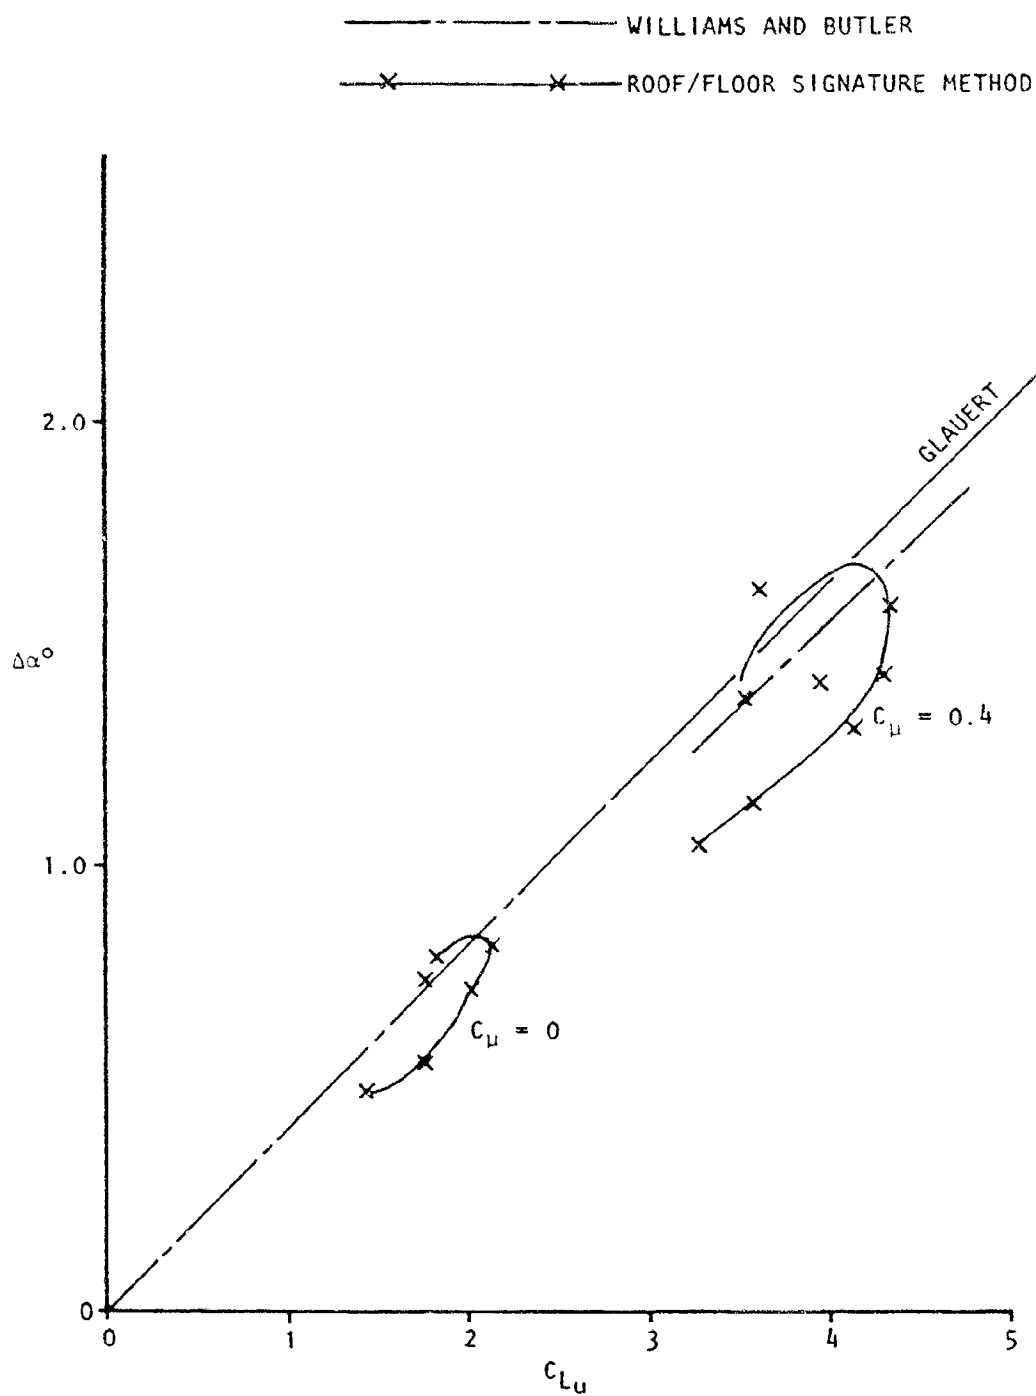


Figure 5.3 Angle-of-attack corrections for the swept,
 knee-blown jet-flap model
 a) $C_\mu = 0$ and 0.40

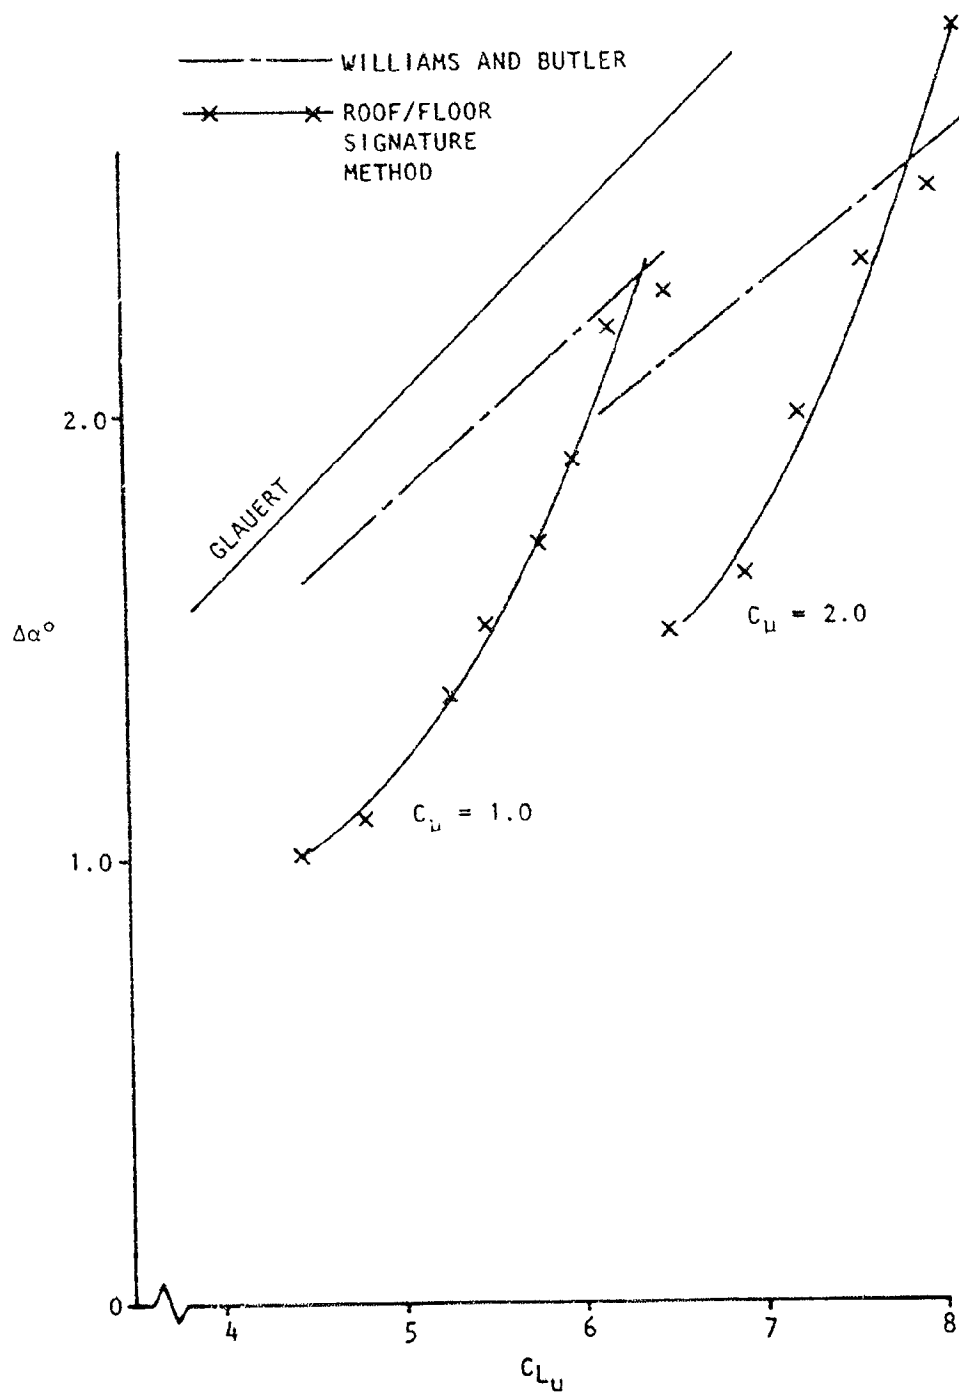


Figure 5.3 (continued) Angle-of-attack corrections for the swept, knee blown, jet-flap model
b) $C_u = 1.0$ and 2.0

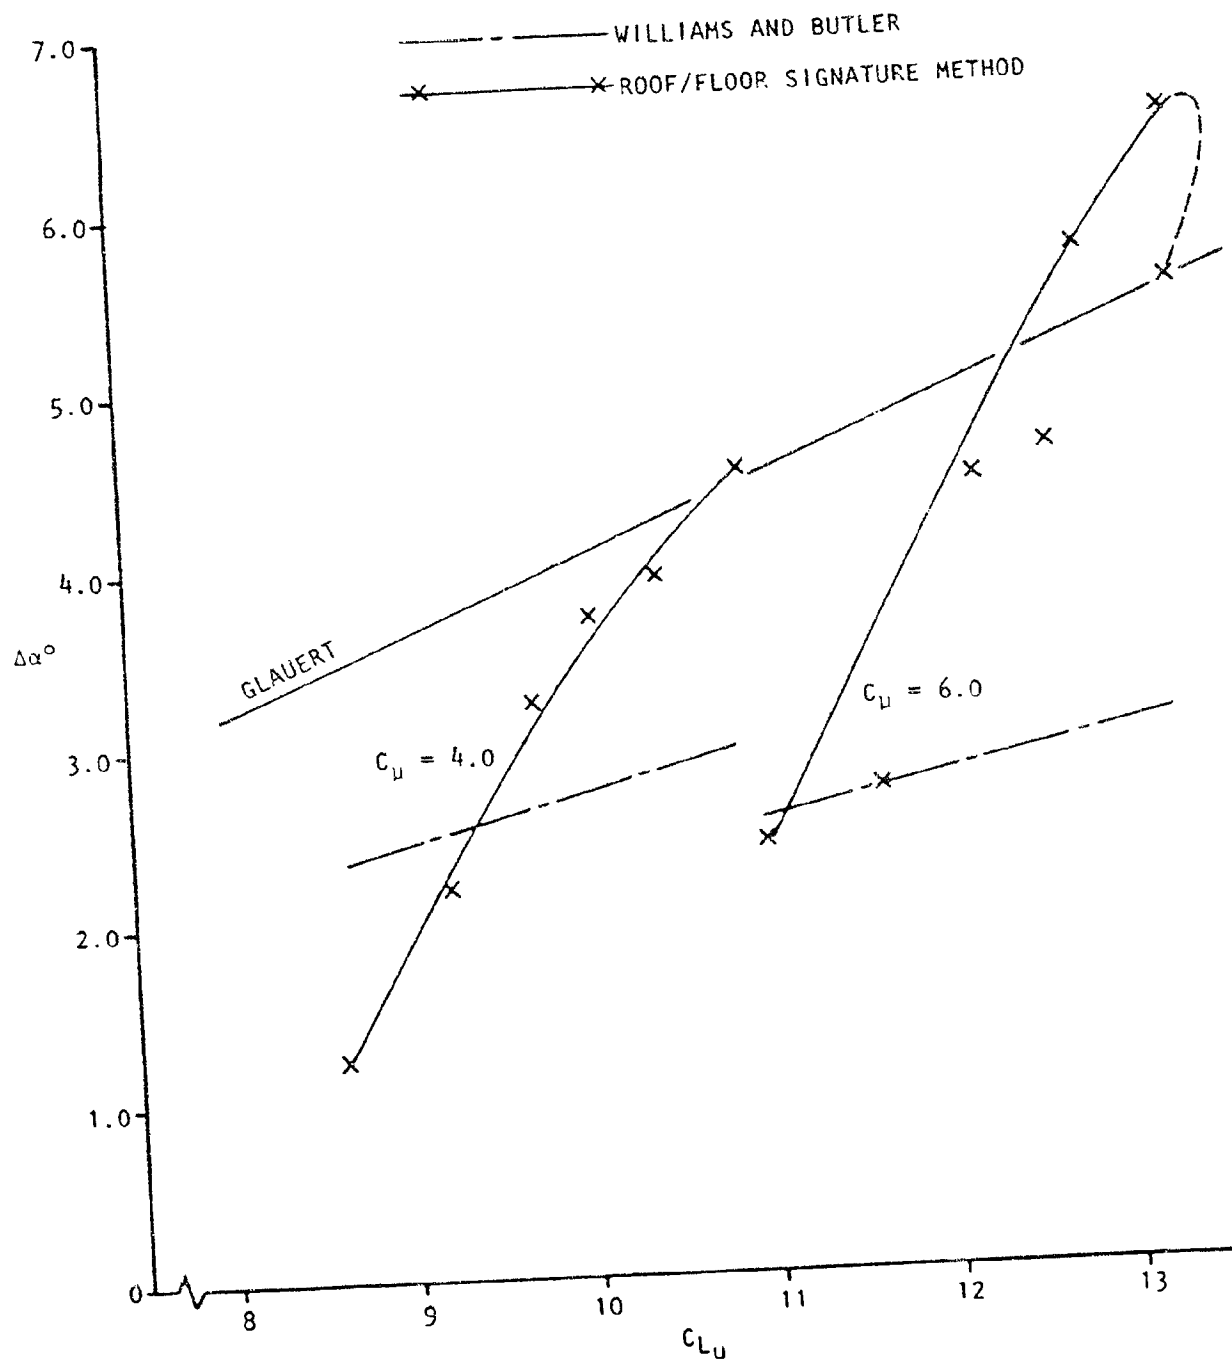


Figure 5.3 (concluded) Angle-of-attack corrections for the swept, knee-blown, jet-flap model
c) $C_\mu = 4.0$ and 6.0

ORIGINAL PAGE IS
OF POOR QUALITY

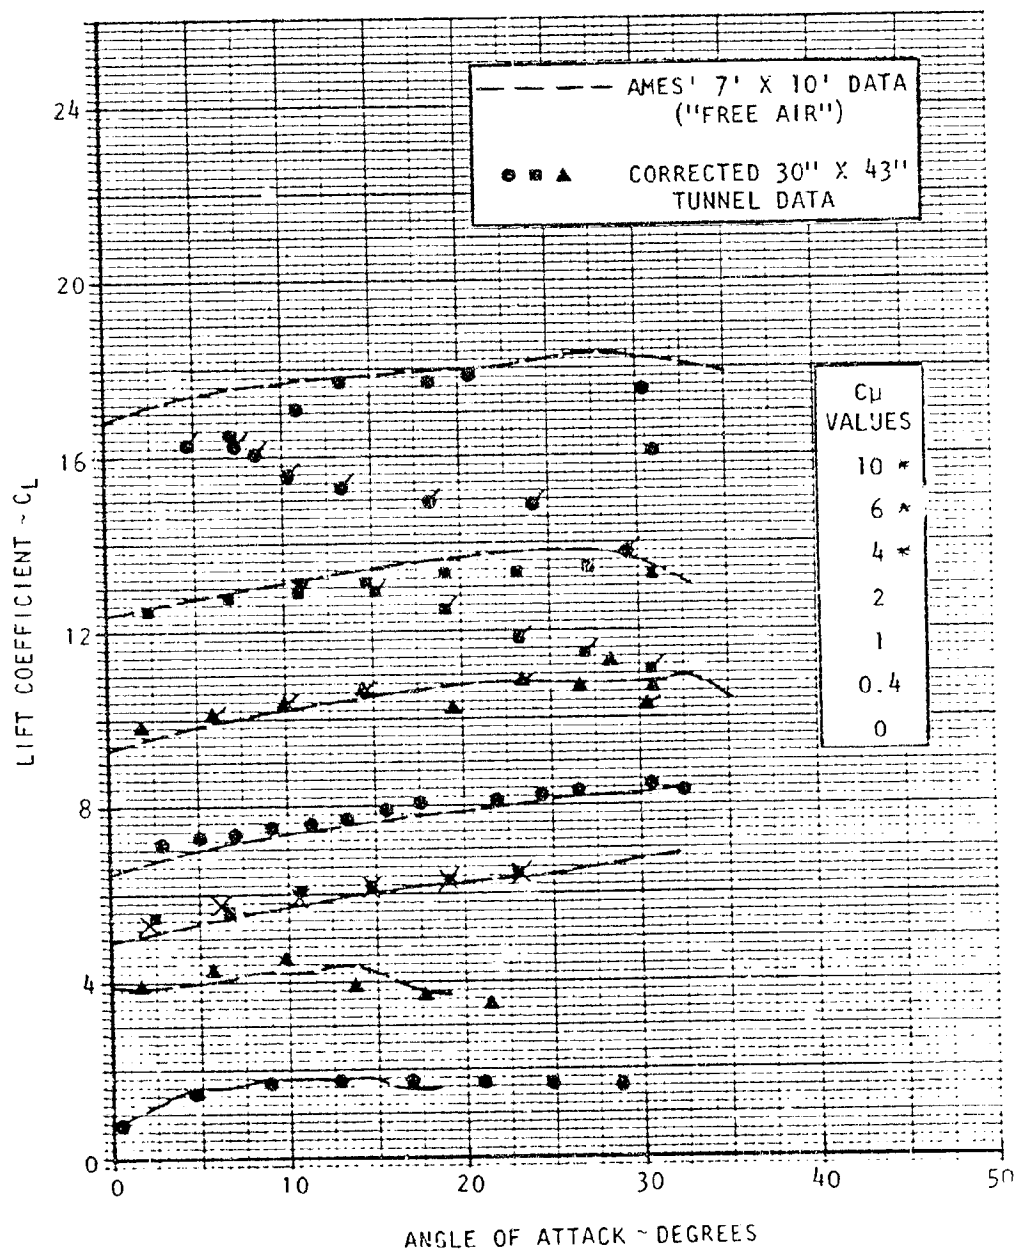


Figure 5.4(a) Basic Lift Data, Straight Wing With Slats

ORIGINAL PAGE IS
OF POOR QUALITY

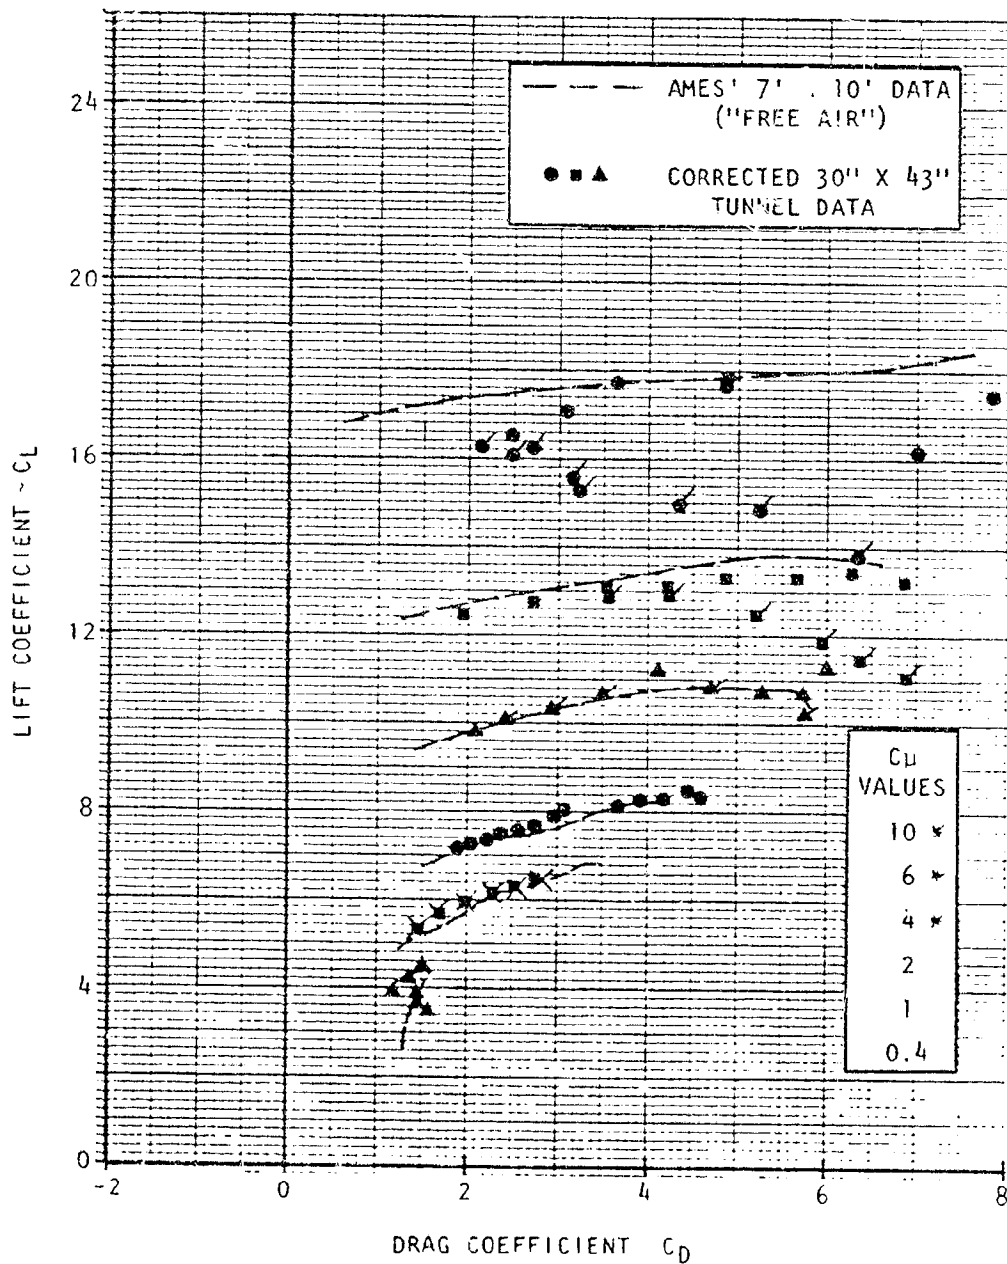


Figure 5.4(b) Basic Drag Data, Straight Wing With Slats

ORIGINAL PAGE IS
OF POOR QUALITY

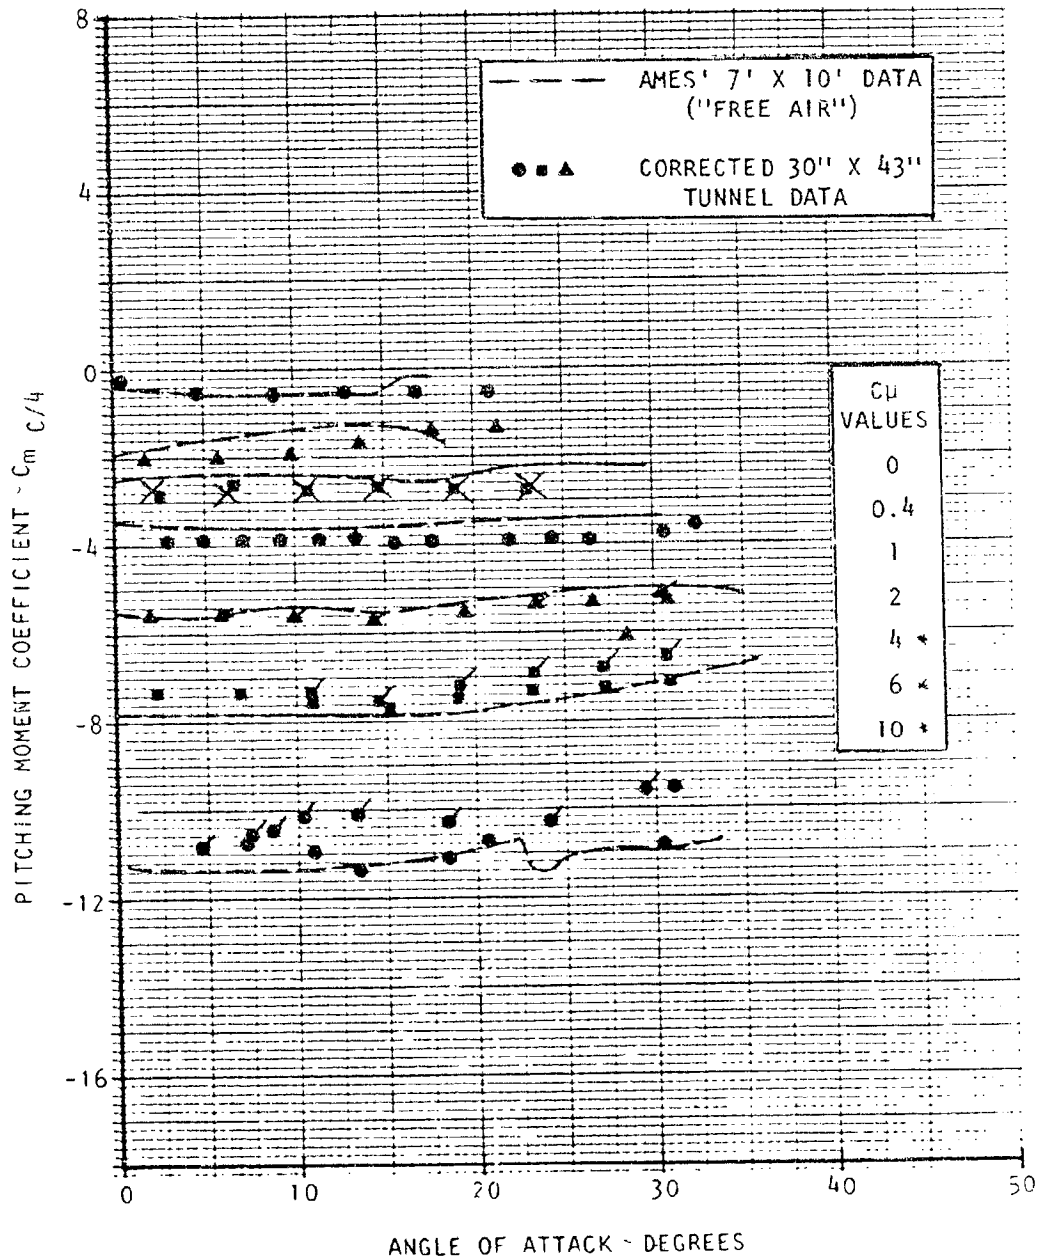


Figure 5.4(c) Basic Pitching Moment Data, Straight Wing With Slats


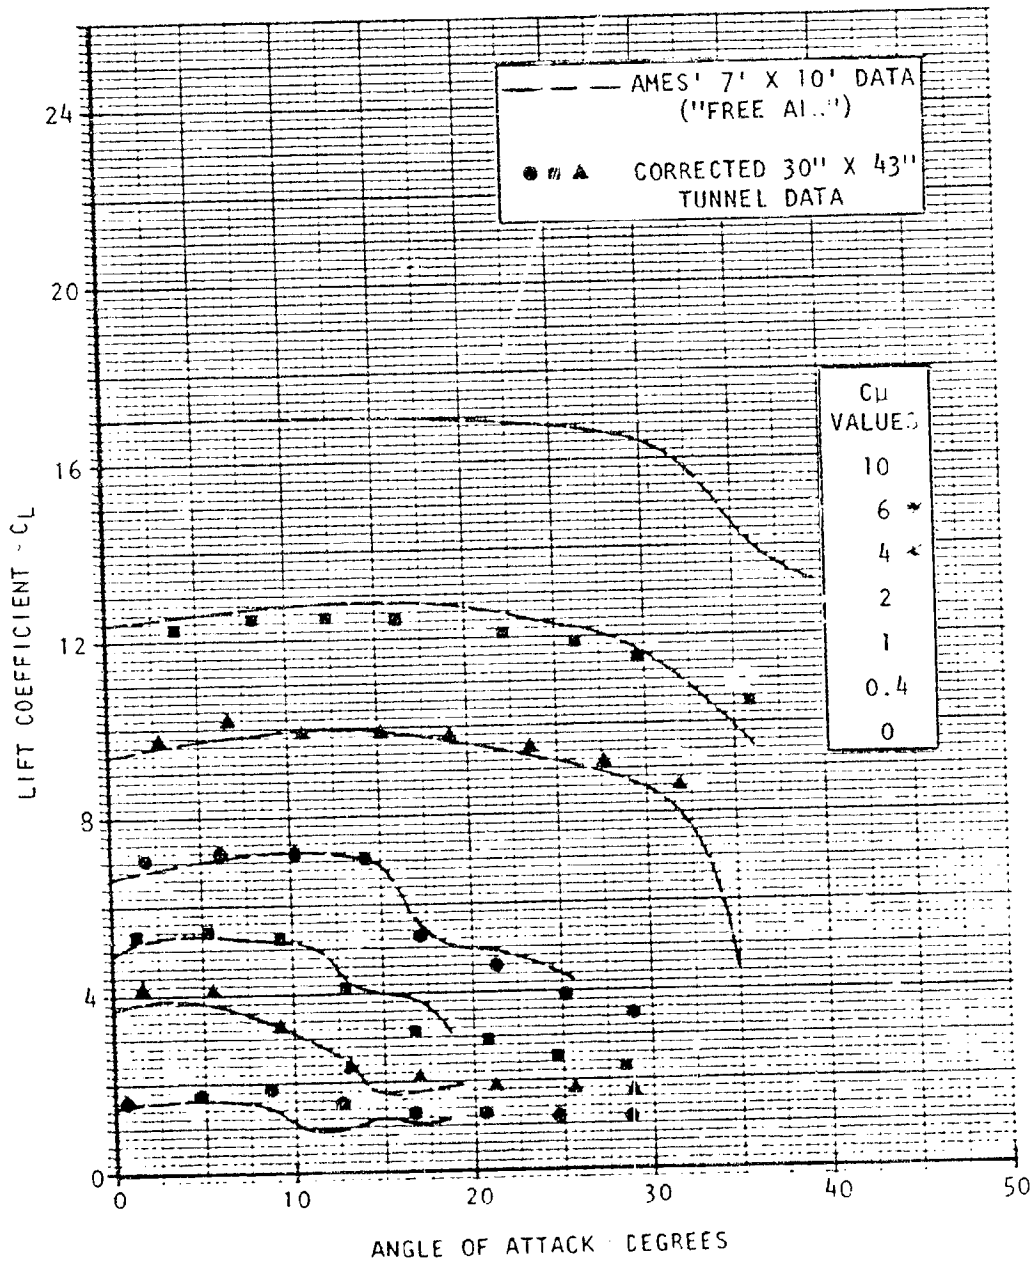


Figure 5.5(a) Basic Lift Data, Straight Wing, No Slats

2 OF 2

23234 UN

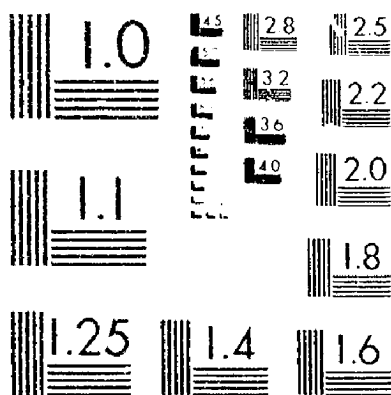

MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

ORIGINAL PAGE IS
OF POOR QUALITY

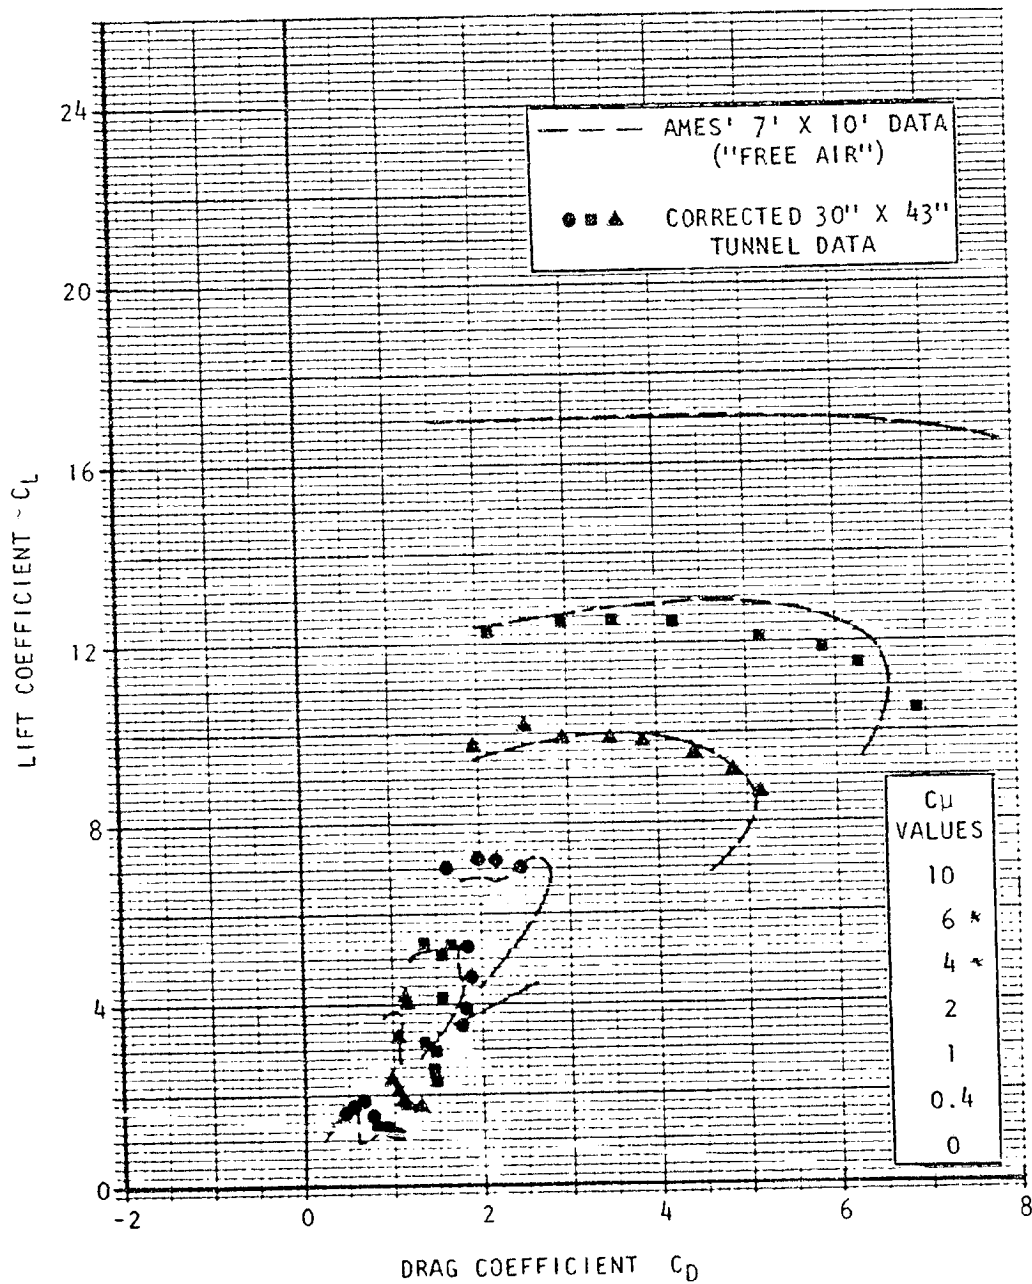


Figure 5.5(b) Basic Drag Data, Straight Wing, No Slats

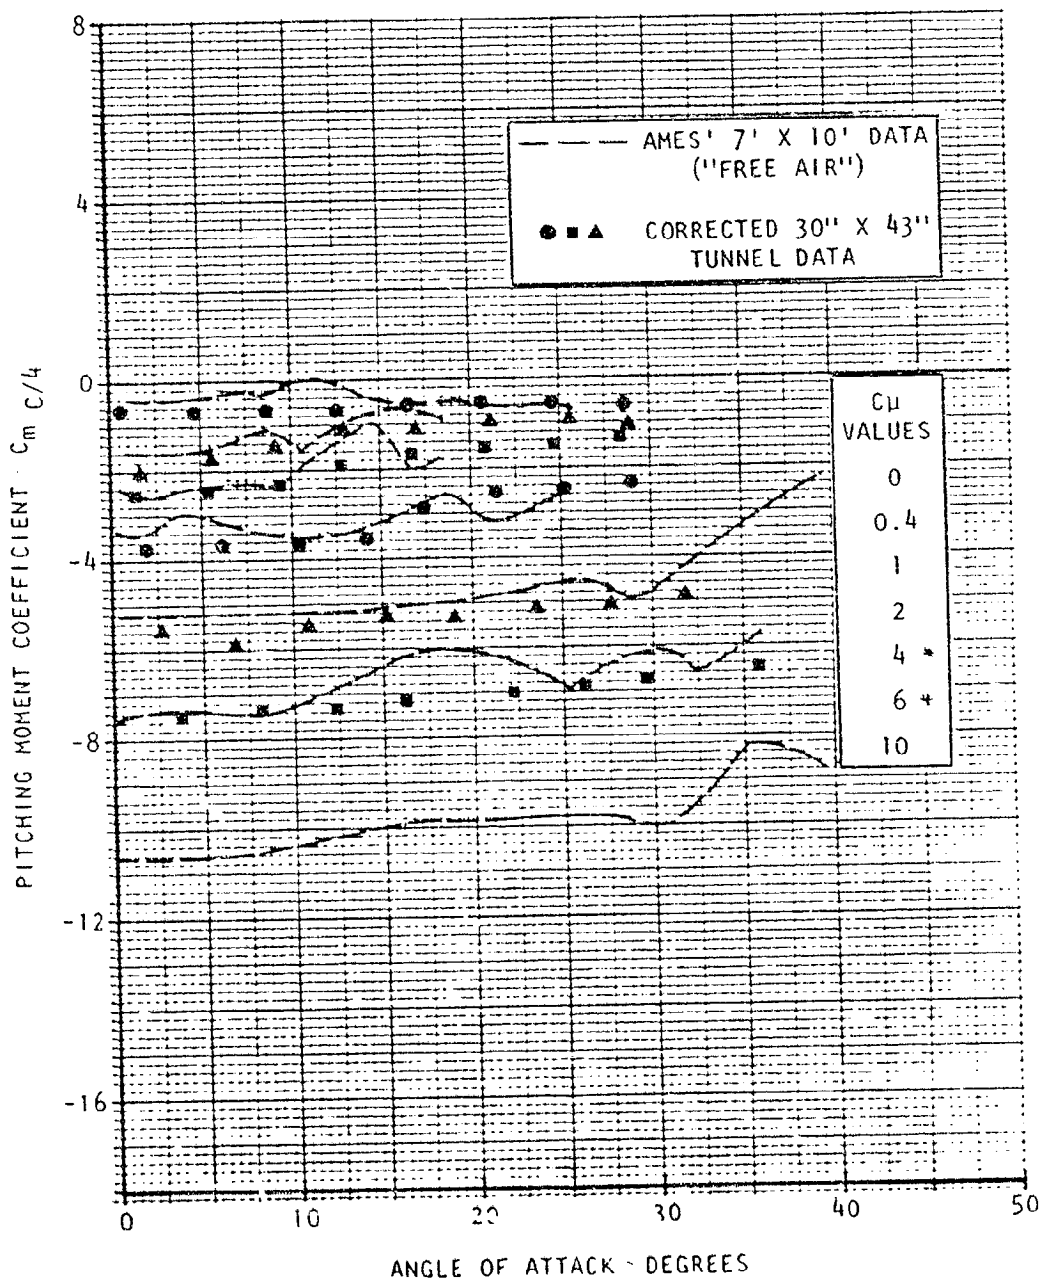


Figure 5.5(c) Basic Pitching Moment Data, Straight Wing, No Slats

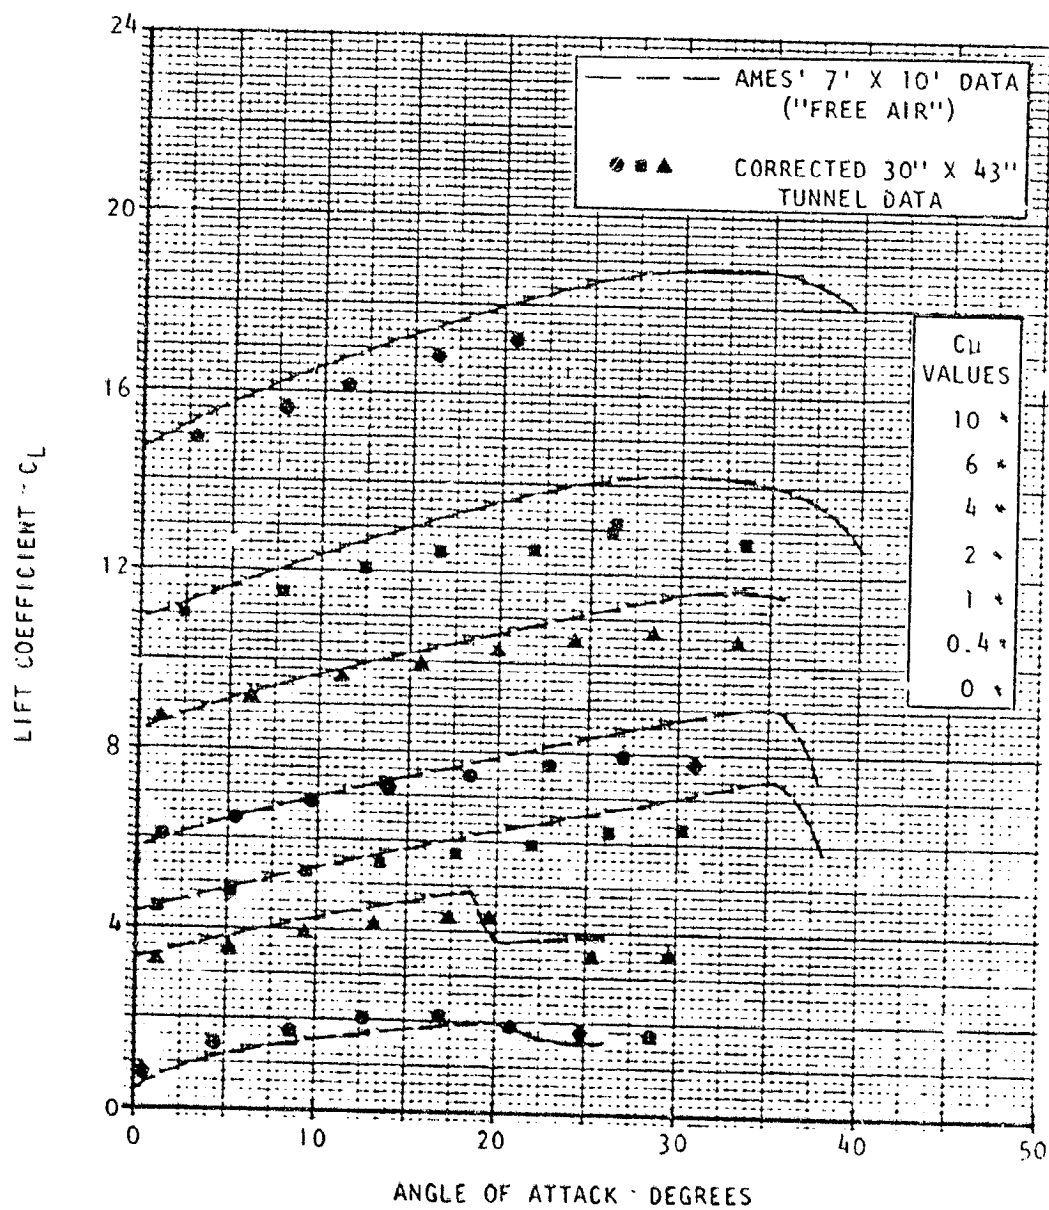


Figure 5.6(a) Basic Lift Data, Swept Wing With Slats.

ORIGINAL PAGE IS
OF POOR QUALITY

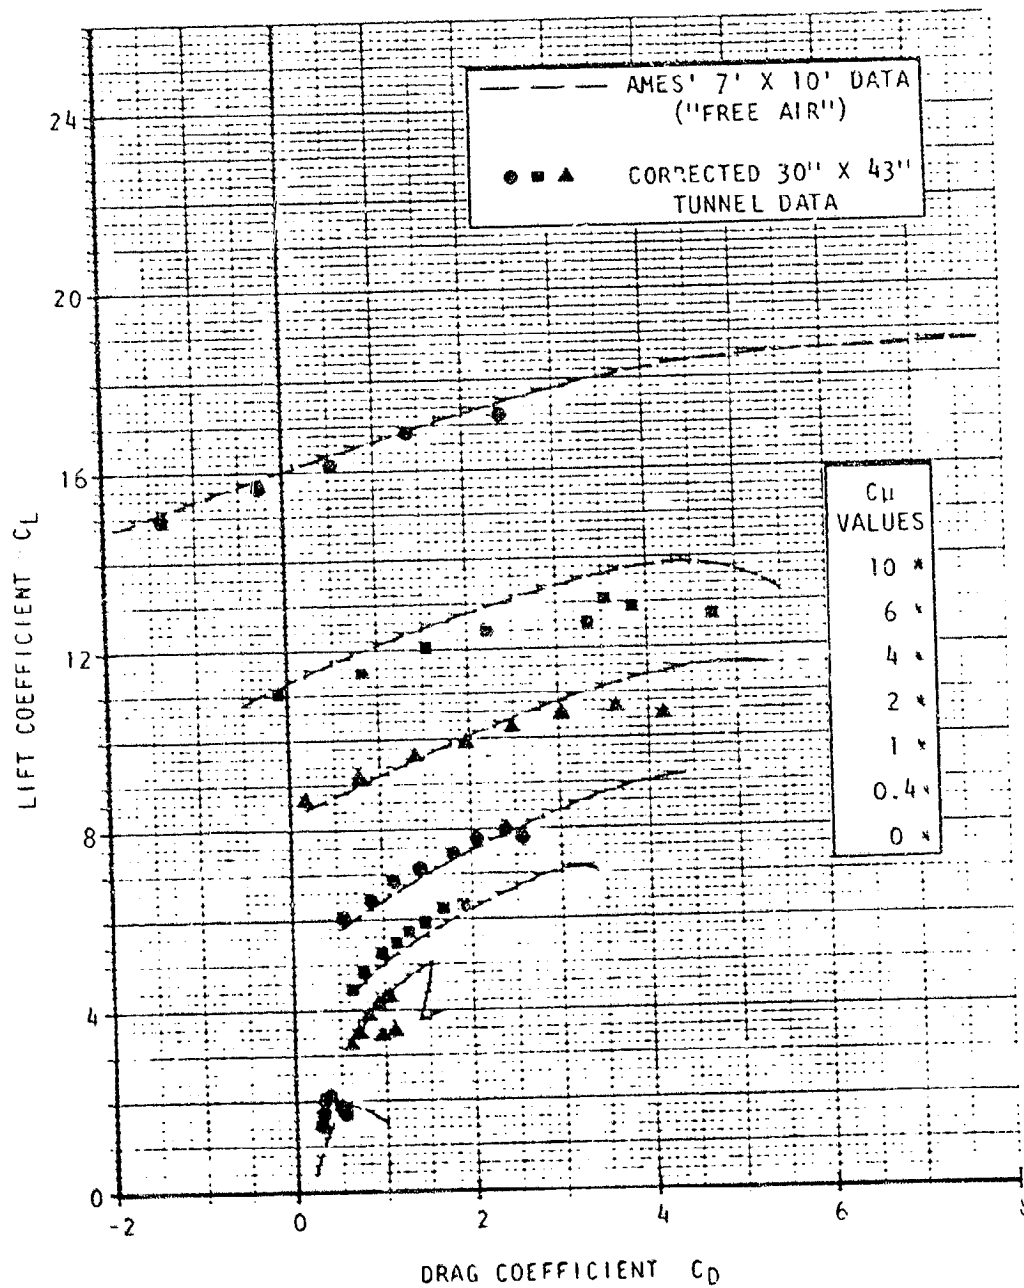


Figure 5.6(b) Basic Drag Data, Swept Wing With Slats

ORIGINAL PAGE IS
OF POOR QUALITY

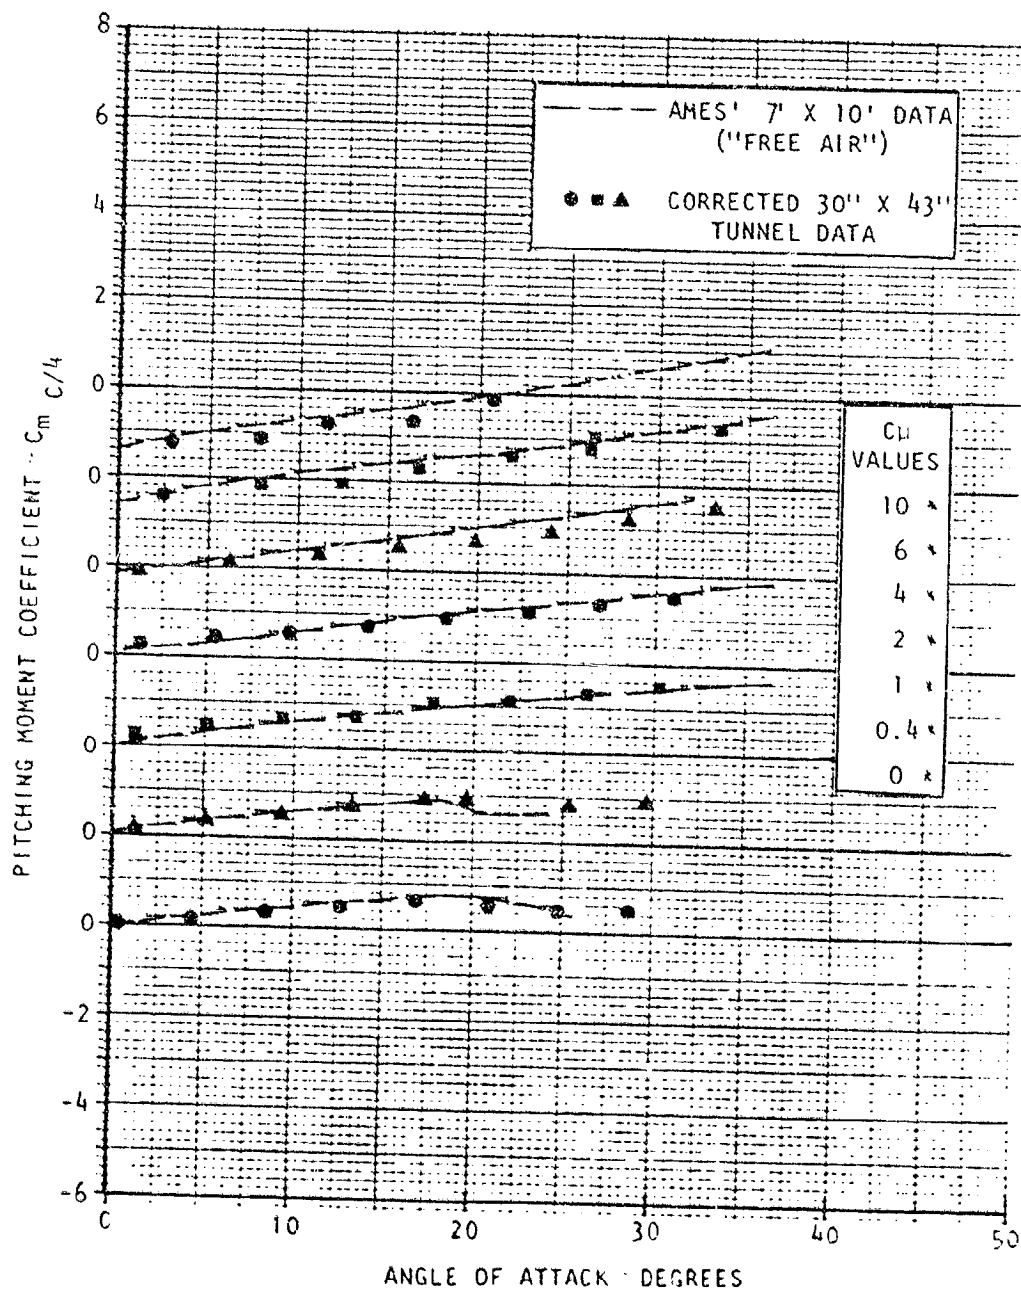


Figure 5.6(c) Basic Pitching Moment Data, Swept Wing With Slats

ORIGINAL PAGE IS
OF POOR QUALITY

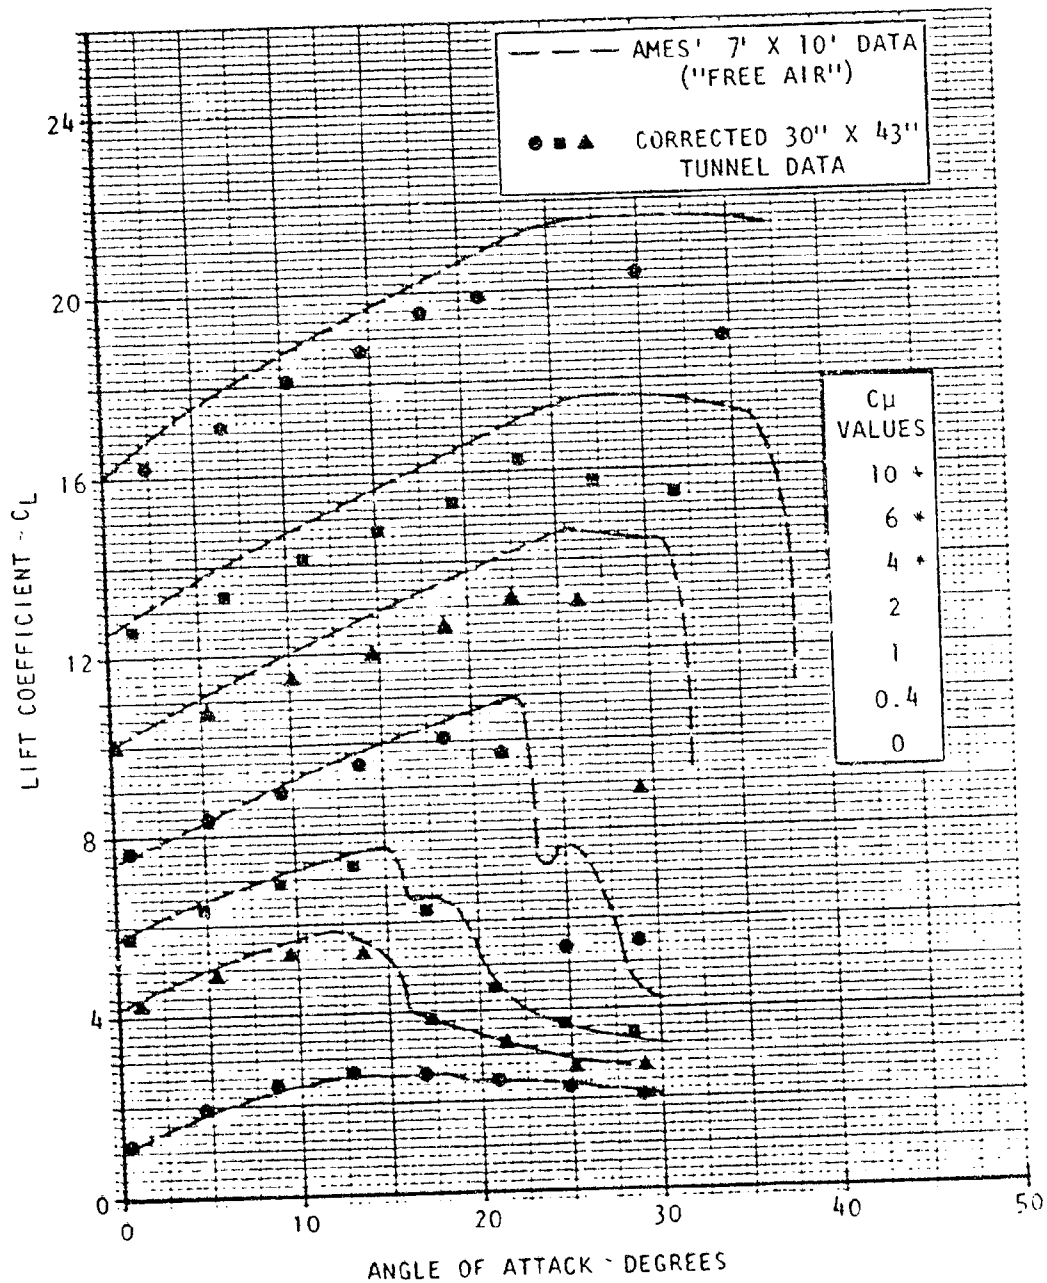


Figure 5.7(a) Basic Lift Data, Swept Wing With Tips and Full-Span Slats

ORIGINAL PAGE IS
OF POOR QUALITY

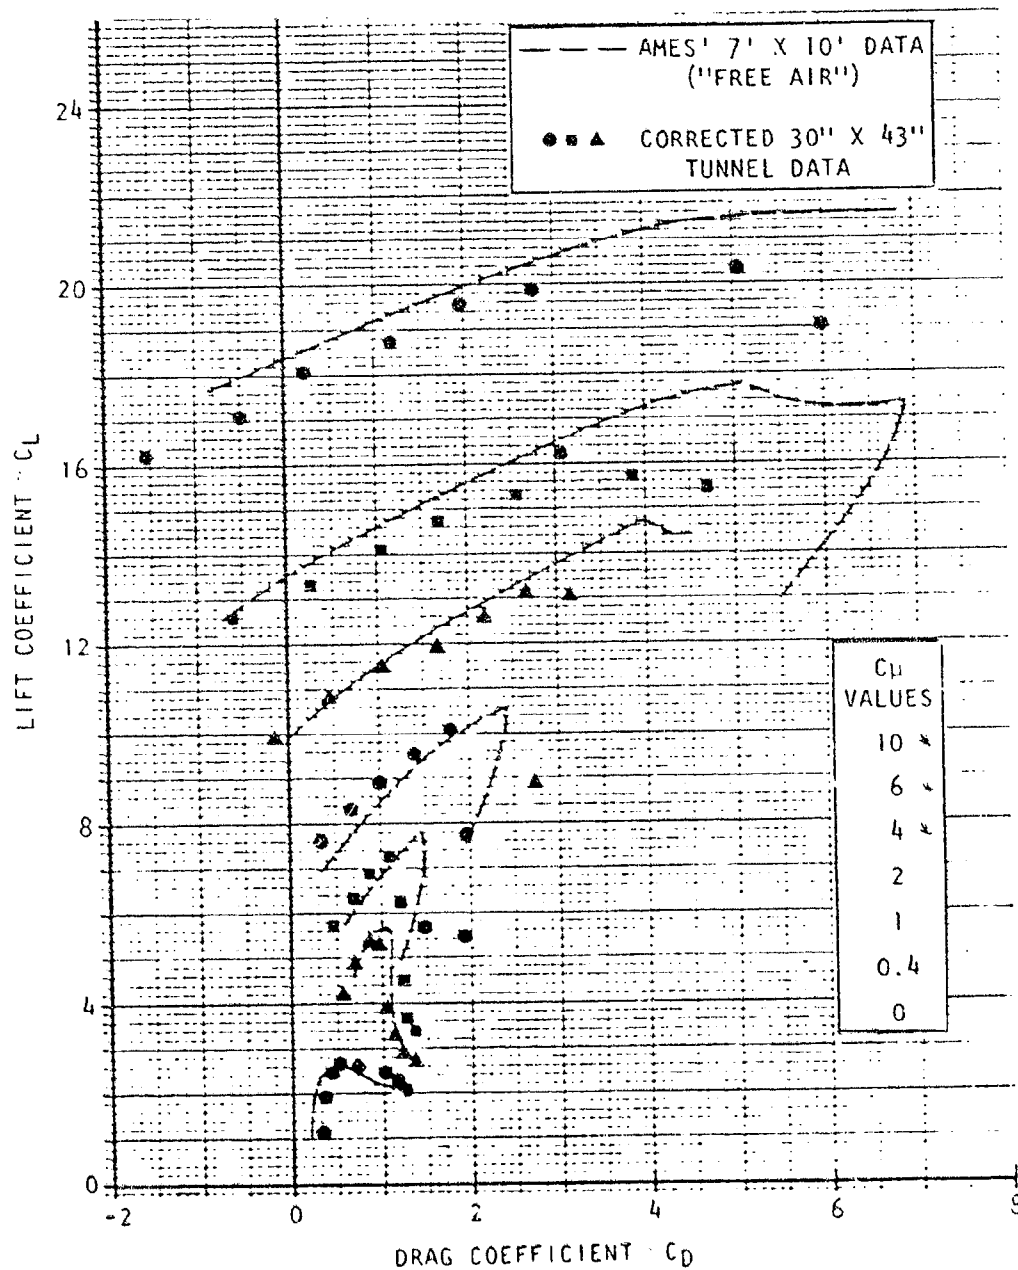


Figure 5.7(b) Basic Drag Data, Swept Wing With Tips and Full-Span Slats

ORIGINAL PAGE IS
OF POOR QUALITY



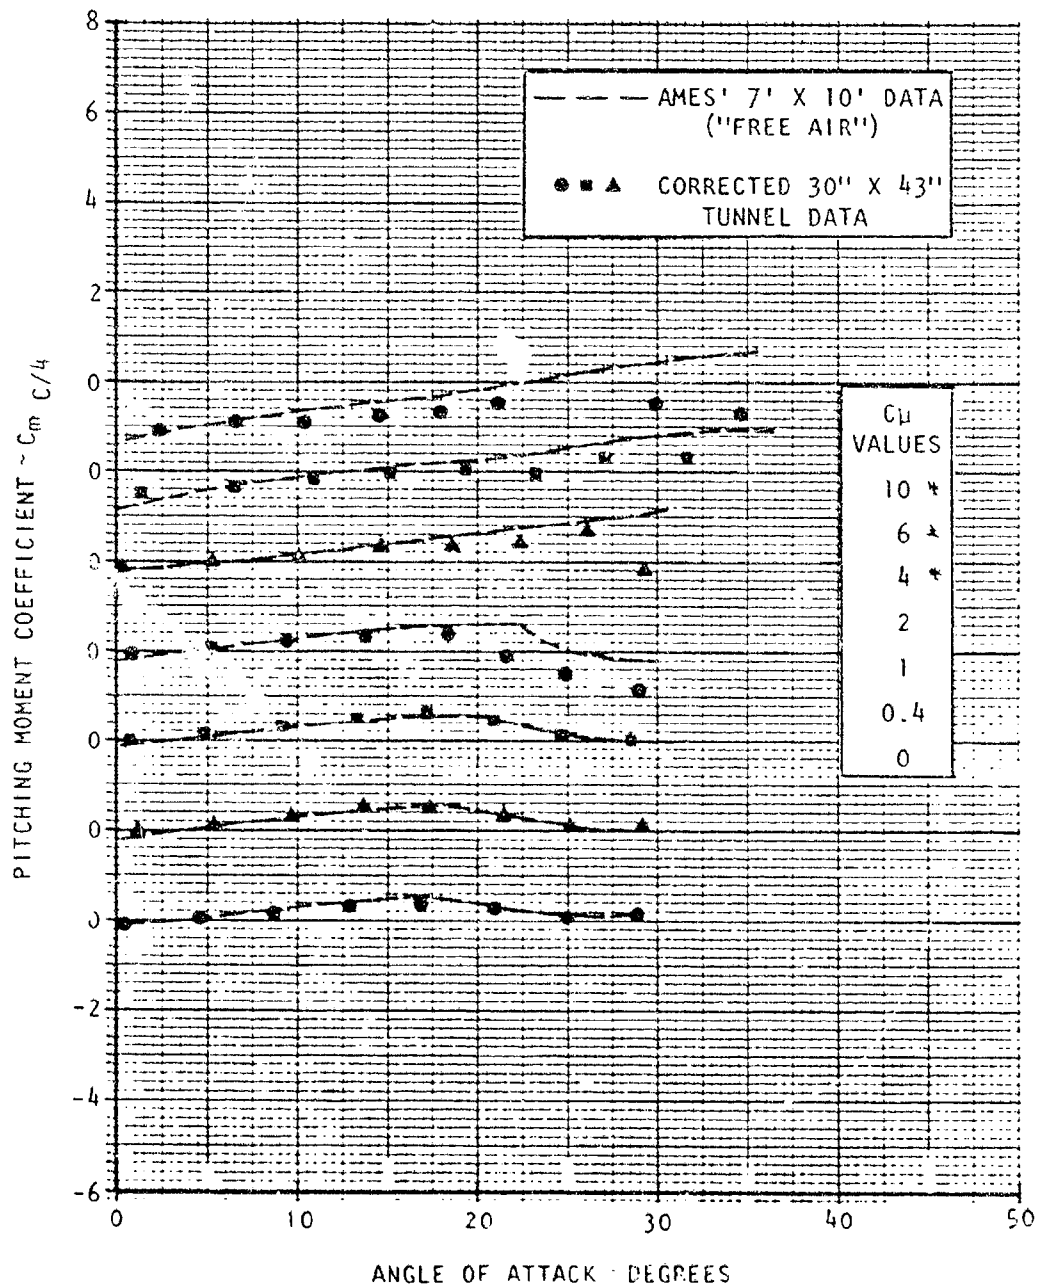


Figure 5.7(c) Basic Pitching Moment Data, Swept Wing With Tips and Full-Span Slats

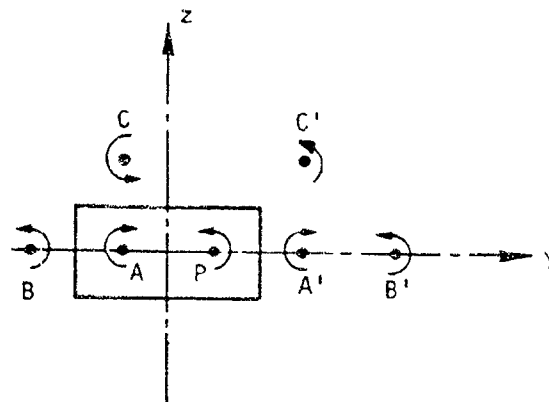

Upwash at P , due to A, B, C etc, is neutralized by downwash due to A', B', C' etc.

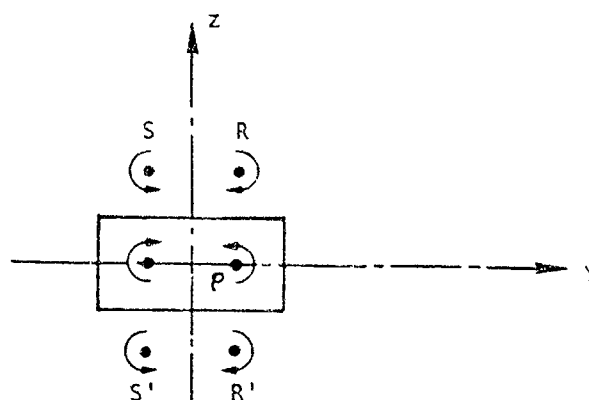

Sidewash at P , due to R, S etc, is balanced by sidewash due to R', S' etc.

Figure 6.1 Occurrence of 'neutral' points in a wind tunnel cross section.

APPENDIX 1

PROGRAM DESCRIPTION

APPENDIX - 1

PROGRAM DESCRIPTION

Capabilities:

The tunnel-wall-effect correction program is a generalized version to handle complex pressure signatures arising from powered model tests. It essentially solves an inverse problem of determining the strengths of potential singularities, the geometry of which has been specified, to satisfy the measured pressure signatures on the tunnel boundaries. The number of singularities can be fewer than the number of pressure signature points since the present approach satisfies the boundary condition in least squares sense.

It is possible for the user to specify arbitrary orientations and geometry for the potential singularities to model the actual flow as closely as possible. In the present version of the program, no assumptions regarding the symmetry or anti-symmetry of the influence coefficients are made to resolve the signature into vortex-related and source-sink-related parts. This resolution is done iteratively during the numerical computations. At present, the tunnel geometry however is restricted to rectangular shapes, since the computational procedure uses imaging technique to ensure zero-normal-flow through the tunnel walls. However, alternative arrangements are made for cases involving the 40' x 80' tunnel cross section (see below).

Normally, the difference between the observed supervelocity on the roof and the one on the floor is used as boundary condition for obtaining the vortex strengths. However, with powered models involving jet impingement on the floor, it may not be desirable to use the floor signature in the calculations. In such cases a flag, IRF, can be set to handle only the

roof signature. Note that this requires that the cross term flags (KROSG and KROSQ) should be turned on and that the number of iterations (ITERMAX) should be set larger than unity even if all singularities are placed symmetrically with respect to the tunnel cross-section.

The program coding was developed using a VAX-16 computer. FORTRAN statements that may cause problems in other systems are identified by the characters VAX in columns 73 - 75 of those statements. When using other systems these statements should be appropriately replaced.

The present coding is written with the assumption that the pressure signatures and load coefficients to be corrected are made available in a mass storage file. The subroutine READCP reads in these values using FORTAN I/O unit number 10. This subroutine is written to handle specifically the KBF model data of Lockheed-Georgia. In this case, eight rails of tunnel wall signature data were available in a mass storage file in the form of super-velocities rather than C_p -values. Also, since the x-wise locations of pressure points for rail No. 7 was different from the rest of the rails, a subroutine INTER is employed to linearly interpolate the rail-7 data to the standard x-wise locations. Since the general user's data structure will be different from that of Lockheed's KBF tests, these subroutines and their calling sequences in the driver program might have to be replaced.

Preparation of Input Data

The overall sequence of computations and the effects of different flag settings are shown in the flow chart given in figure A1. The meaning of all input variables are explained in the next section. A typical run of the program involves one of the two cases: (1) The required matrices are all

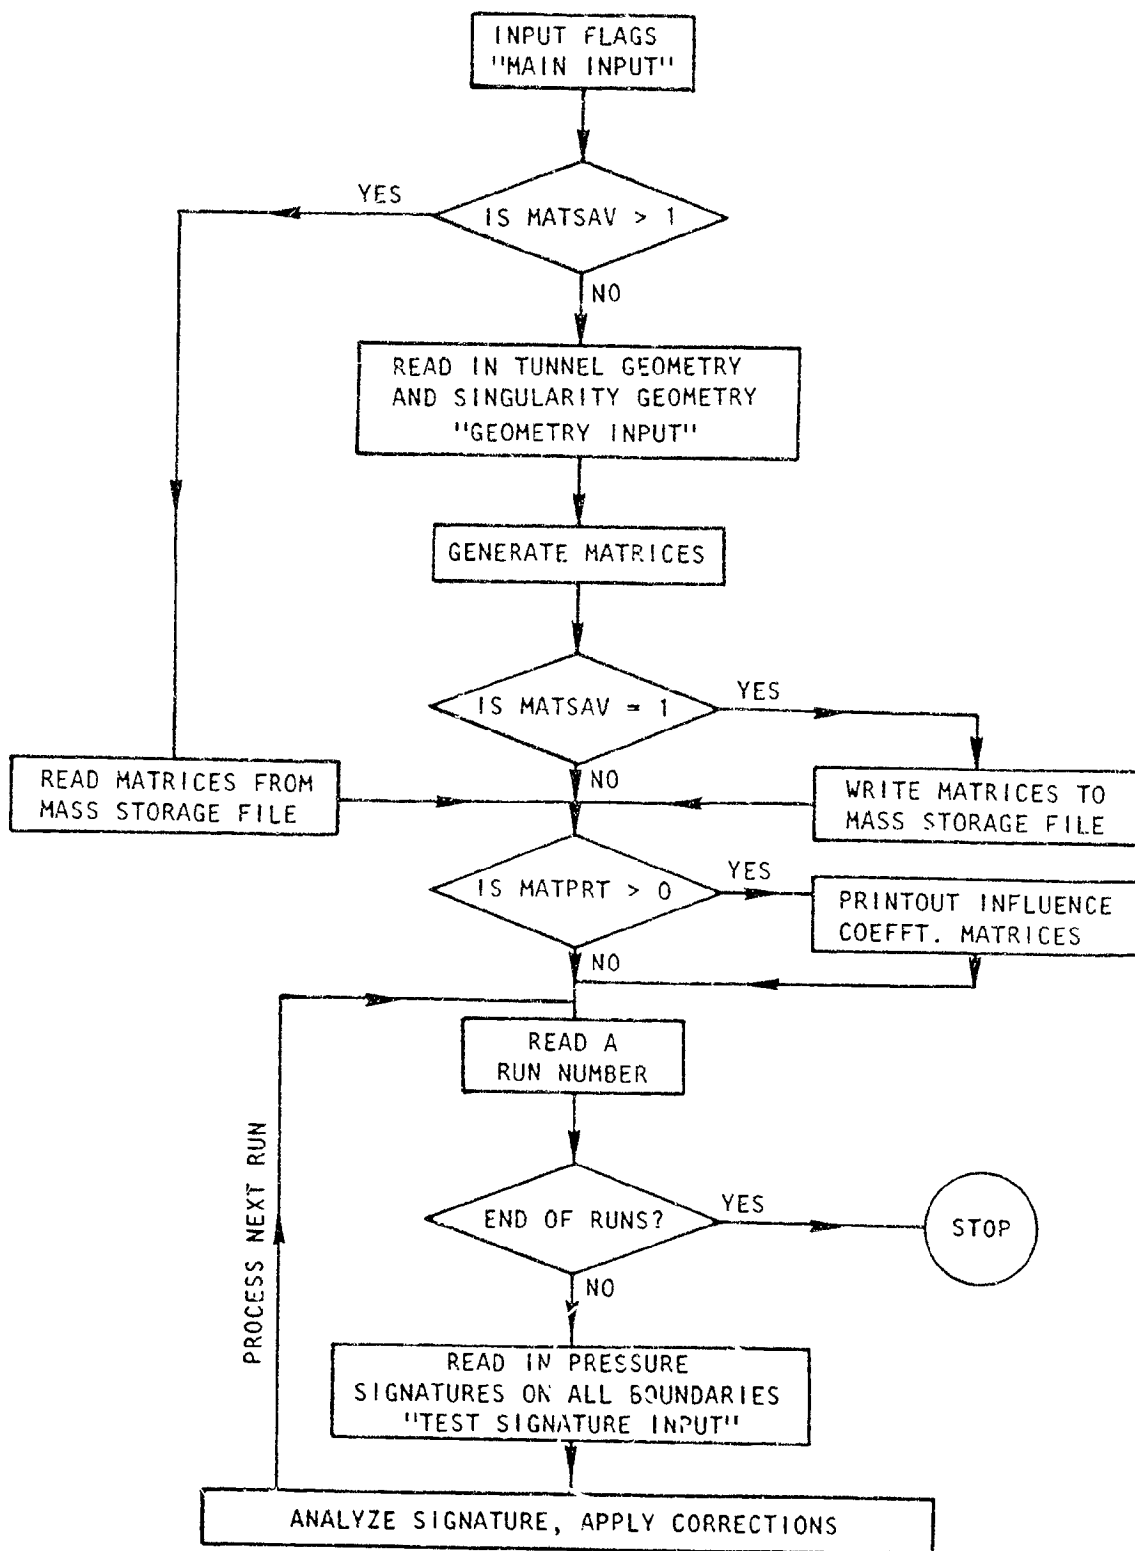


Figure A1. Flow chart for wall-pressure signature-based tunnel interference program.

a) Pre-analysis routines

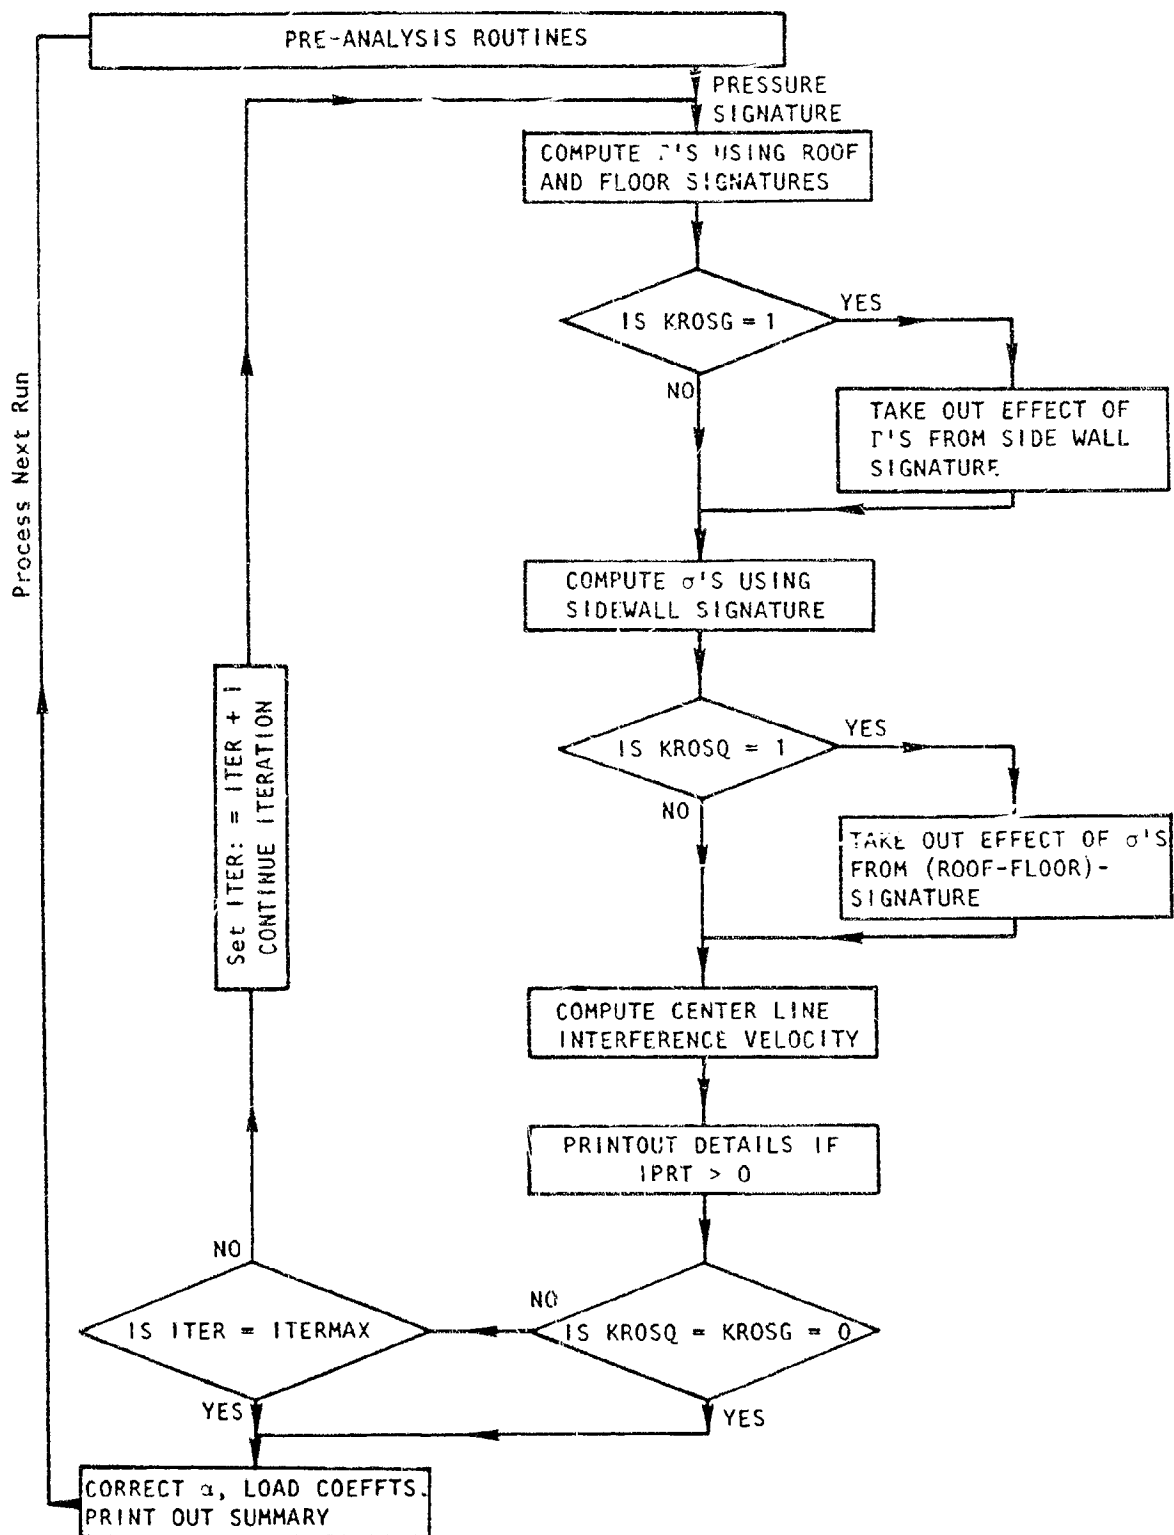


Figure A1. Flow Chart for Wall Pressure Signature-Based Tunnel Interference Program.

b) Signature Analysis and Data Correction.

available and only the signatures need be processed. (2) The matrices must be generated and saved for future use. The input sequence for these two cases are as follows. (1) Matrices available: Prepare Card Number 1 through 3 as indicated under next section. Set MATSAV=2 in Card Number 3. Skip Cards 4 through 9 and prepare Card No. 10. (2) Matrices must be generated: Prepare all cards, No. 1 through No. 10. Set MATSAV=1 in Card No. 3.

Description of Input Variables

Main Input - The main input portion consists of a title, all flag variables and a few key variables related to the model geometry as outlined below.

1

| |
|-------|
| TITLE |
|-------|

 Format -- 80A1

TITLE: Test Description

2

| | | | | | | | |
|---------|--------|--------|------|-------|-------|-------|---------|
| ITERMAX | MATPRT | MATSAV | IPRT | KROSG | KROSQ | ICORR | JETEFCT |
|---------|--------|--------|------|-------|-------|-------|---------|

 Format -- 1615

ITERMAX: Maximum number of iterations to be performed when cross-effect-terms are to be included in analyzing the signatures. Program automatically sets this to unity if both KROSG and KROSQ are zeros.

MATPRT: A non-zero value causes all influence coefficient matrices to be printed out.

MATSAV: Three-way flag.

=0: Generates matrices but does not save them.

=1: Generates matrices and writes them to FORTRAN unit Number 8.

=2: Implies that all required matrices are available from a previous run. They will be read from FORTRAN unit No. 8.

IPRT: Flag for printout detail.

=0: Prints out a one page summary for each tunnel test.

=1: Prints out details for each iteration.

KROSG: When non-zero, calculates and takes out the sidewall upwash due to vortices in determining the u-velocity boundary conditions on side walls from pressure coefficients.

KROSQ: When non-zero takes out the cross effect of sources/sinks from the Roof/Floor signature, before calculating the circulation strengths of the vortices. (Note: A non-zero value is meaningful only if sources/sinks are not placed symmetrically with respect to the tunnel cross section).

ICORR: The centerline interference velocities at the x-location corresponding to this index will be used in making final corrections to angle of attack and the loads.

JETEFCT: Non-zero if model includes a lifting jet.
(See Part II of the report)

3

| | | |
|-------|-----|-----|
| SAREA | AWB | BWB |
|-------|-----|-----|

 Format--8F10.4

SAREA: Model Reference Area used in normalizing the load coefficients.

AWB:
BWB:

Constants in the Butler-Williams Equation for correction
to angle of attack, $\Delta\alpha = \text{AWB} \cdot \text{CL}_C / (1 + \text{BWB} \cdot C_{\mu C})$.

Geometry Input: The input of this section pertains to the tunnel geometry
and the singularity geometry.

This entire section should be skipped while preparing the input in MATSAV=2 in
the Main Input which implies that all required matrices are already available.

4

| | | | | | |
|--------|-----|----|----|----|----|
| LAYERS | IRF | NR | NW | NV | NS |
|--------|-----|----|----|----|----|

 Format--1615

LAYERS: No. of Image Layers to be used (Recommended: 5)

IRF: Flag for determining whether floor signature is to be
used or not.

=0: Implies usage of roof signature only.

=1: Implies usage of (roof-floor) values.

(Note: If roof signature only is to be used, set KROSQ=1
and ITERMAX=1)

NR: No. of roof signature points.

(It is assumed No. of floor signature points is same)

NW: No. of side-wall signature points. (Both sides are
assumed to have same no. of points).

NV: No. of vortex singularities

NS: No. of source/sink singularities

5


| | | | |
|---|---|-------|-------|
| B | H | XPVOR | XPSRC |
|---|---|-------|-------|

 Format--8F10.4

B: Tunnel Breadth

H: Tunnel Height

XPVOR: Pivot point for pitching swept vortex, normalized w.r.t.
span (See sketch). Meaningful only when the vortex is
swept.

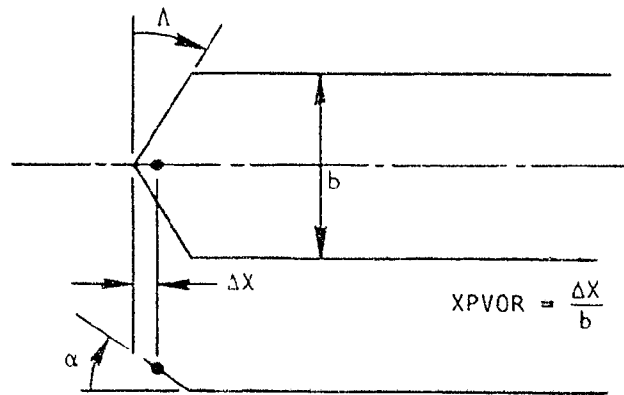

XPSRC: Pivot point for pitching swept source/sink normalized with respect to semi-span. Definition is similar to XPVOR given above.

| | | | | | | |
|-----------|---|-----------|-----------|-----------|----------------|--|
| 6.1 | <table><tr><td>XR_1</td><td>YR_1</td><td>ZR_1</td></tr></table> | XR_1 | YR_1 | ZR_1 | Format--8F10.4 | Non-dimensional coordinates, x/B, y/B, z/H, of the roof/ floor signature points. |
| XR_1 | YR_1 | ZR_1 | | | | |
| 6.2 | <table><tr><td>XR_2</td><td>YR_2</td><td>ZR_2</td></tr></table> | XR_2 | YR_2 | ZR_2 | Format--8F10.4 | |
| XR_2 | YR_2 | ZR_2 | | | | |
| • | | | | | | |
| • | | | | | | |
| • | | | | | | |
| 6.NR | <table><tr><td>XR_{NR}</td><td>YR_{NR}</td><td>ZR_{NR}</td></tr></table> | XR_{NR} | YR_{NR} | ZR_{NR} | Format--8F10.4 | |
| XR_{NR} | YR_{NR} | ZR_{NR} | | | | |
| 7.1 | <table><tr><td>XL_1</td><td>YL_1</td><td>ZL_1</td></tr></table> | XL_1 | YL_1 | ZL_1 | Format--8F10.4 | Non-dimensional coordinates, x/B, y/B, z/H of the side-wall signature points. |
| XL_1 | YL_1 | ZL_1 | | | | |
| 7.2 | <table><tr><td>XL_2</td><td>YL_2</td><td>ZL_2</td></tr></table> | XL_2 | YL_2 | ZL_2 | Format--8F10.4 | |
| XL_2 | YL_2 | ZL_2 | | | | |
| • | | | | | | |
| • | | | | | | |
| • | | | | | | |
| 7.NW | <table><tr><td>XL_{NW}</td><td>YL_{NW}</td><td>ZL_W</td></tr></table> | XL_{NW} | YL_{NW} | ZL_W | Format--8F10.4 | |
| XL_{NW} | YL_{NW} | ZL_W | | | | |

| | | | | | | | |
|------|------------------|------------------|------------------|-------------------|--------------------|--------------------|----------------|
| 8.1 | XV ₁ | YV ₁ | ZV ₁ | SBV ₁ | PSIV ₁ | ALFV ₁ | Format--8F10.4 |
| 8.2 | XV ₂ | YV ₂ | ZV ₂ | SBV ₂ | PSIV ₂ | ALFV ₂ | Format--8F10.4 |
| | • | | | | | | |
| | • | | | | | | |
| 8.NV | XV _{NV} | YV _{NV} | ZV _{NV} | SBV _{NV} | PSIV _{NV} | ALFV _{NV} | Format--8F10.4 |

(XV,YV,ZV): Non-dimensional coordinate x/B, y/B, z/H of the "roof" point of horse-shoe vortices.

SBV: Vortex span normalized with B

PSIV: Sweep angle for the vortex (degrees)

ALFV: Pitch angle for the vortex (degrees)

| | | | | | | | |
|------|------------------|------------------|------------------|-------------------|--------------------|--------------------|----------------|
| 9.1 | XS ₁ | YS ₁ | ZS ₁ | SBS ₁ | PSIS ₁ | ALFS ₁ | Format--8F10.4 |
| 9.2 | XS ₂ | YS ₂ | ZS ₂ | SBS ₂ | PSIS ₂ | ALFS ₂ | Format--8F10.4 |
| | • | | | | | | |
| | • | | | | | | |
| 9.NS | XS _{NS} | YS _{NS} | ZS _{NS} | SBS _{NS} | PSIS _{NS} | ALFS _{NS} | Format--8F10.4 |

The definitions of these variables, defining the source/sink locations and geometries, are similar to the ones for vortices.

Test Signature Input: This last input card contains the values of key variables identifying the test, the signatures corresponding to which are to be picked up from a mass storage file. This card can be repeated as many times as desired to process all required runs. (NOTE: The user may need to replace this section of the coding. See earlier comments about subroutines READCP and INTER)

| | | | | | | | | | |
|----|-------|------|-------|-------|--------|-------|-------|-------|------|
| 10 | ITEST | IRUN | IPMIN | IPMAX | IFLOOR | IROOF | IWAL1 | IWAL2 | 1615 |
|----|-------|------|-------|-------|--------|-------|-------|-------|------|

ITEST: Test Number

IRUN: Run Number

IPMIN: Point No., minimum

IPMAX: Point No., maximum

For the given run number the program will process data for all points i in the range $IPMIN \leq i \leq IPMAX$.

IFLOOR: Pressure signature rail no. for floor

IROOF: Pressure signature rail no. for roof

IWAL1: Pressure signature rail no. for first sidewall.

IWAL2: Pressure signature rail no. for second sidewall.

Mass-Storage File Requirements:

In addition to the standard input/output FORTRAN units (#5 and #6 in the coding), the coding employs four other mass-storage files, as explained below.

UNIT-7: Output file. The test no., run no., point no. are written to this file along with a summary of measured and corrected angle of attacks and load coefficients. It may be used in preparing plots if so desired.

UNIT-8: Input/Output file.
This would contain all the input data entered in the section "geometry Input", all the required influence coefft. matrices and the least square inverse matrices. This file has to be generated and saved when the program is run for the first time or whenever a change in any of the input variable described in the section "Geometry Input" is made.

UNIT-9: Output file

For each data point and for each iteration this would contain the input signatures, the recalculated boundary conditions and the centerline interference velocity components. It may be used in preparing machine plots to evaluate the program.

UNIT-10: Input file.

For each data point, this file should have the pressure signature. The structure of this file is left to the user (See comments about subroutine READCP above).

Output Format

A complete sample output follows the program listing. The output is sufficiently well annotated for easy comprehension of the print out. In the printer plots of the input signature, calculated wall supervelocities and tunnel center line velocities, the correspondence is readily established by looking for the same plot symbol under the tabulated data. In the table of corrected α and load coefficients, the values labelled "CLASSICAL" are the ones obtained using Butler-Williams equation. In the output annotations the word ROOF would mean either roof alone or (roof-floor) values depending upon how the input was arranged. Notations like "U-Q-CL" imply "u-velocity due to sources at tunnel center line."

EXAMPLE..KBF_TESTS...USE AVAILABLE MATRICES...EXCLUDE CROSS TERMS

| | | | | | |
|----|----|----|------|----------|---|
| 1 | 8 | 2 | 1 | 8 | 8 |
| 88 | 88 | 88 | 7132 | 8.126978 | 7 |
| 62 | 73 | 7 | 7 | 6 | 2 |

SAMPLE INPUT WHEN
MATRICES ARE AVAILABLE

ORIGINAL FILE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY

EXAMPLE..KNEE_BLOWN_FLAP_TESTS..GENERATE MATRIX..EXCLUDE CROSS TERMS

TUNNEL GEOMETRY : BREADTH: 43.000
 HEIGHT: 30.000
 IMAGE LAYERS: 5

SAMPLE OUTPUT

RUN NUMBER: 73 POINT NUMBER: 7

INPUT BOUNDARY CONDITIONS. ROOF-FLOOR

| I | X/B | Y/B | Z/H | U,R-F |
|----|---------|--------|--------|-------------|
| 1 | -0.8140 | 0.0000 | 0.5000 | 0.0000E+00 |
| 2 | -0.4651 | 0.0000 | 0.5000 | 0.3150E-01 |
| 3 | -0.3721 | 0.0000 | 0.5000 | 0.5054E-01 |
| 4 | -0.2791 | 0.0000 | 0.5000 | 0.7614E-01 |
| 5 | -0.1860 | 0.0000 | 0.5000 | 0.1200E+00 |
| 6 | -0.0930 | 0.0000 | 0.5000 | 0.1631E+00 |
| 7 | 0.0000 | 0.0000 | 0.5000 | -0.1482E+00 |
| 8 | 0.0698 | 0.0000 | 0.5000 | 0.3211E+00 |
| 9 | 0.1395 | 0.0000 | 0.5000 | 0.3347E+00 |
| 10 | 0.2093 | 0.0000 | 0.5000 | 0.3353E+00 |
| 11 | 0.2791 | 0.0000 | 0.5000 | 0.2685E+00 |
| 12 | 0.3488 | 0.0000 | 0.5000 | 0.2335E+00 |
| 13 | 0.4186 | 0.0000 | 0.5000 | 0.1227E+00 |
| 14 | 0.4884 | 0.0000 | 0.5000 | 0.5940E-01 |
| 15 | 0.5874 | 0.0000 | 0.5000 | 0.4251E-01 |
| 16 | 0.6977 | 0.0000 | 0.5000 | -0.3000E-02 |
| 17 | 0.8372 | 0.0000 | 0.5000 | 0.3020E-01 |
| 18 | 0.9667 | 0.0000 | 0.5000 | -0.9210E-01 |
| 19 | 1.1163 | 0.0000 | 0.5000 | -0.2400E-01 |
| 20 | 1.2558 | 0.0000 | 0.5000 | -0.1950E-01 |
| 21 | 1.3953 | 0.0000 | 0.5000 | 0.9900E-02 |

EXTRA OUTPUT OBTAINED
BY SETTING THE FLAG
{PRT = 1}

INPUT BOUNDARY CONDITIONS. SIDE WALL

| I | X/B | Y/B | Z/H | U, WALL |
|----|---------|--------|--------|-------------|
| 1 | -0.8140 | 0.5000 | 0.0000 | 0.0000E+00 |
| 2 | -0.4651 | 0.5000 | 0.0000 | -0.4200E-02 |
| 3 | -0.3721 | 0.5000 | 0.0000 | -0.3300E-02 |
| 4 | -0.2791 | 0.5000 | 0.0000 | -0.1100E-02 |
| 5 | -0.1860 | 0.5000 | 0.0000 | 0.6550E-02 |
| 6 | -0.0930 | 0.5000 | 0.0000 | 0.1515E-01 |
| 7 | 0.0000 | 0.5000 | 0.0000 | 0.2490E-01 |
| 8 | 0.0698 | 0.5000 | 0.0000 | 0.3430E-01 |
| 9 | 0.1395 | 0.5000 | 0.0000 | 0.3810E-01 |
| 10 | 0.2093 | 0.5000 | 0.0000 | 0.4135E-01 |
| 11 | 0.2791 | 0.5000 | 0.0000 | 0.3690E-01 |
| 12 | 0.3488 | 0.5000 | 0.0000 | 0.3410E-01 |
| 13 | 0.4186 | 0.5000 | 0.0000 | 0.1740E-01 |
| 14 | 0.4884 | 0.5000 | 0.0000 | 0.2900E-01 |
| 15 | 0.5874 | 0.5000 | 0.0000 | 0.2410E-01 |
| 16 | 0.6977 | 0.5000 | 0.0000 | 0.2225E-01 |
| 17 | 0.8372 | 0.5000 | 0.0000 | 0.2145E-01 |
| 18 | 0.9667 | 0.5000 | 0.0000 | 0.2200E-01 |
| 19 | 1.1163 | 0.5000 | 0.0000 | 0.2345E-01 |
| 20 | 1.2558 | 0.5000 | 0.0000 | 0.6065E-01 |
| 21 | 1.3953 | 0.5000 | 0.0000 | |

ITERATION : 1

VORTEX STRENGTHS. (STR = G/(U*SQRT(R*H)))

EXTRA OUTPUT OBTAINED
BY SETTING THE FLAG
IPRT = 1

| I | X/B | Y/B | Z/H | SPAN/B | SWEEP | PITCH | STR |
|---|--------|--------|--------|--------|---------|---------|-------------|
| 1 | 0.0000 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | 0.5905E+00 |
| 2 | 0.0500 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | -0.1243E+01 |
| 3 | 0.2000 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | 0.1438E+01 |
| 4 | 0.3500 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | -0.5727E+00 |

TOTAL: 0.3136E+00

SOURCE STRENGTHS. (STR = Q/(U*B*H))

| I | X/B | Y/B | Z/H | SPAN/B | SWEEP | PITCH | STR |
|---|---------|--------|--------|--------|---------|---------|-------------|
| 1 | -0.7000 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | -0.4218E-02 |
| 2 | -0.0116 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | -0.1373E-01 |
| 3 | 0.0698 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | -0.2407E+00 |
| 4 | 0.2209 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | -0.4228E+00 |
| 5 | 0.3480 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | 0.3777E+00 |
| 6 | 0.4884 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | -0.2447E+00 |
| 7 | 0.6280 | 0.0000 | 0.0000 | 0.4000 | 25.0000 | 15.0000 | 0.1006E+00 |

TOTAL: 0.3356E-01

CROSS_EFFECT TERMS:

| | U_Q_ROOF | U_G_WALL | W_G_WALL |
|----|------------|------------|------------|
| 1 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 2 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 3 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 4 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 5 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 6 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 7 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 8 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 9 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 10 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 11 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 12 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 13 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 14 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 15 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 16 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 17 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 18 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 19 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 20 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |
| 21 | 0.0000E+00 | 0.0000E+00 | 0.0000E+00 |

RE_CALCULATED BOUNDARY CONDITIONS ON ROOF

| I | X/B | Y/B | Z/H | U_ROOF | CP_ROOF |
|---|---------|--------|--------|------------|-------------|
| 1 | -0.8140 | 0.0000 | 0.5000 | 0.3391E-02 | -0.6794E-02 |
| 2 | -0.4651 | 0.0000 | 0.5000 | 0.1762E-01 | -0.3555E-01 |
| 3 | -0.3721 | 0.0000 | 0.5000 | 0.2736E-01 | -0.5547E-01 |
| 4 | -0.2791 | 0.0000 | 0.5000 | 0.4192E-01 | -0.8561E-01 |
| 5 | -0.1860 | 0.0000 | 0.5000 | 0.6229E-01 | -0.1285E+00 |

EXTRA OUTPUT OBTAINED
BY SETTING THE FLAG
IPRT = 1

| | | | | | |
|----|--------|--------|--------|-------------|-------------|
| 7 | 0.0000 | 0.0000 | 0.5000 | 0.1327E+00 | -0.2030E+00 |
| 8 | 0.0698 | 0.0000 | 0.5000 | 0.1917E+00 | -0.4201E+00 |
| 9 | 0.1395 | 0.0000 | 0.5000 | 0.2711E+00 | -0.6157E+00 |
| 10 | 0.2093 | 0.0000 | 0.5000 | 0.3384E+00 | -0.7699E+00 |
| 11 | 0.2791 | 0.0000 | 0.5000 | 0.3198E+00 | -0.7420E+00 |
| 12 | 0.3489 | 0.0000 | 0.5000 | 0.2386E+00 | -0.5340E+00 |
| 13 | 0.4186 | 0.0000 | 0.5000 | 0.1358E+00 | -0.2881E+00 |
| 14 | 0.4884 | 0.0000 | 0.5000 | 0.5520E-01 | -0.1135E+00 |
| 15 | 0.5874 | 0.0000 | 0.5000 | 0.2276E-02 | -0.4557E-02 |
| 16 | 0.6977 | 0.0000 | 0.5000 | -0.9274E-02 | 0.1846E-01 |
| 17 | 0.8372 | 0.0000 | 0.5000 | -0.6313E-02 | 0.1259E-01 |
| 18 | 0.9667 | 0.0000 | 0.5000 | -0.3191E-02 | 0.6372E-02 |
| 19 | 1.1163 | 0.0000 | 0.5000 | -0.1368E-02 | 0.2734E-02 |
| 20 | 1.2558 | 0.0000 | 0.5000 | -0.6342E-03 | 0.1260E-02 |
| 21 | 1.3953 | 0.0000 | 0.5000 | -0.3045E-03 | 0.6090E-03 |

RE_CALCULATED BOUNDARY CONDITIONS ON WALL

| I | X/B | Y/B | Z/H | U_WALL | V_WALL | CP_WALL |
|----|---------|--------|--------|-------------|------------|-------------|
| 1 | -0.8140 | 0.5000 | 0.0000 | -0.4003E-02 | 0.0000E+00 | 0.7990E-02 |
| 2 | -0.4651 | 0.5000 | 0.0000 | -0.2385E-02 | 0.0000E+00 | 0.4765E-02 |
| 3 | -0.3721 | 0.5000 | 0.0000 | -0.1000E-02 | 0.0000E+00 | 0.1999E-02 |
| 4 | -0.2791 | 0.5000 | 0.0000 | 0.1441E-02 | 0.0000E+00 | -0.2889E-02 |
| 5 | -0.1860 | 0.5000 | 0.0000 | 0.5726E-02 | 0.0000E+00 | -0.1149E-01 |
| 6 | -0.0930 | 0.5000 | 0.0000 | 0.1298E-01 | 0.0000E+00 | -0.2612E-01 |
| 7 | 0.0000 | 0.5000 | 0.0000 | 0.2402E-01 | 0.0000E+00 | -0.4862E-01 |
| 8 | 0.0698 | 0.5000 | 0.0000 | 0.3371E-01 | 0.0000E+00 | -0.6855E-01 |
| 9 | 0.1395 | 0.5000 | 0.0000 | 0.4106E-01 | 0.0000E+00 | -0.8380E-01 |
| 10 | 0.2093 | 0.5000 | 0.0000 | 0.4176E-01 | 0.0000E+00 | -0.6525E-01 |
| 11 | 0.2791 | 0.5000 | 0.0000 | 0.3552E-01 | 0.0000E+00 | -0.7229E-01 |
| 12 | 0.3488 | 0.5000 | 0.0000 | 0.2843E-01 | 0.0000E+00 | -0.5767E-01 |
| 13 | 0.4186 | 0.5000 | 0.0000 | 0.2597E-01 | 0.0000E+00 | -0.5262E-01 |
| 14 | 0.4884 | 0.5000 | 0.0000 | 0.2616E-01 | 0.0000E+00 | -0.5300E-01 |
| 15 | 0.5874 | 0.5000 | 0.0000 | 0.2304E-01 | 0.0000E+00 | -0.4661E-01 |
| 16 | 0.6977 | 0.5000 | 0.0000 | 0.2009E-01 | 0.0000E+00 | -0.4058E-01 |
| 17 | 0.8372 | 0.5000 | 0.0000 | 0.2523E-01 | 0.0000E+00 | -0.5110E-01 |
| 18 | 0.9667 | 0.5000 | 0.0000 | 0.2988E-01 | 0.0000E+00 | -0.6065E-01 |
| 19 | 1.1163 | 0.5000 | 0.0000 | 0.3219E-01 | 0.0000E+00 | -0.6541E-01 |
| 20 | 1.2558 | 0.5000 | 0.0000 | 0.3299E-01 | 0.0000E+00 | -0.6707E-01 |
| 21 | 1.3953 | 0.5000 | 0.0000 | 0.3332E-01 | 0.0000E+00 | -0.6775E-01 |

CENTER_LINE INTERFERENCE VELOCITIES

| I | X/B | Y/B | Z/H | U_CNTR | V_CNTR | U_Q_CL | U_G_CL | V_Q_CL | W_G_CL |
|----|---------|--------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| 1 | -0.8140 | 0.0000 | 0.0000 | -0.8220E-03 | -0.2422E-02 | -0.8697E-03 | 0.4686E-04 | 0.2011E-04 | -0.2442E-02 |
| 2 | -0.4651 | 0.0000 | 0.0000 | 0.3530E-02 | -0.1134E-02 | 0.3567E-02 | -0.3794E-04 | 0.1386E-03 | -0.1265E-02 |
| 3 | -0.3721 | 0.0000 | 0.0000 | 0.5611E-02 | 0.2433E-03 | 0.5711E-02 | -0.9992E-04 | 0.1898E-03 | 0.5345E-04 |
| 4 | -0.2791 | 0.0000 | 0.0000 | 0.8220E-02 | 0.2475E-02 | 0.8422E-02 | -0.1935E-03 | 0.2586E-03 | 0.2217E-02 |
| 5 | -0.1860 | 0.0000 | 0.0000 | 0.1137E-01 | 0.5887E-02 | 0.1170E-01 | -0.3295E-03 | 0.3235E-03 | 0.5563E-02 |
| 6 | -0.0930 | 0.0000 | 0.0000 | 0.1403E-01 | 0.1085E-01 | 0.1535E-01 | -0.5176E-03 | 0.3593E-03 | 0.10049E-01 |
| 7 | 0.0000 | 0.0000 | 0.0000 | 0.1823E-01 | 0.1774E-01 | 0.1899E-01 | -0.7552E-03 | 0.3382E-03 | 0.1741E-01 |
| 8 | 0.0698 | 0.0000 | 0.0000 | 0.2043E-01 | 0.2420E-01 | 0.2138E-01 | -0.9444E-03 | 0.2773E-03 | 0.2401E-01 |
| 9 | 0.1395 | 0.0000 | 0.0000 | 0.2214E-01 | 0.3187E-01 | 0.2324E-01 | -0.1104E-02 | 0.1872E-03 | 0.3168E-01 |
| 10 | 0.2093 | 0.0000 | 0.0000 | 0.2330E-01 | 0.4012E-01 | 0.2449E-01 | -0.1190E-02 | 0.8802E-04 | 0.4842E-01 |
| 11 | 0.2791 | 0.0000 | 0.0000 | 0.2399E-01 | 0.4842E-01 | 0.2539E-01 | -0.1164E-02 | 0.2438E-05 | 0.5689E-01 |
| 12 | 0.3488 | 0.0000 | 0.0000 | 0.2437E-01 | 0.5504E-01 | 0.2537E-01 | -0.7993E-03 | -0.8263E-04 | 0.6247E-01 |
| 13 | 0.4186 | 0.0000 | 0.0000 | 0.2457E-01 | 0.6239E-01 | 0.2537E-01 | -0.5453E-03 | -0.8464E-04 | 0.6724E-01 |
| 14 | 0.4884 | 0.0000 | 0.0000 | 0.2471E-01 | 0.6716E-01 | 0.2525E-01 | -0.5453E-03 | -0.8464E-04 | 0.7137E-01 |
| 15 | 0.5874 | 0.0000 | 0.0000 | 0.2495E-01 | 0.7132E-01 | 0.2518E-01 | -0.2299E-03 | -0.5538E-04 | 0.7322E-01 |
| 16 | 0.6977 | 0.0000 | 0.0000 | 0.2549E-01 | 0.7322E-01 | 0.2550E-01 | -0.1232E-04 | 0.3573E-05 | 0.7340E-01 |
| 17 | 0.8372 | 0.0000 | 0.0000 | 0.2671E-01 | 0.7347E-01 | 0.2662E-01 | 0.8975E-04 | 0.7010E-04 | |

ORIGINAL PAGE IS
OF FOUR PAGES

19 1.163 0.0000 0.2970E-01 0.7210E-01 0.2961E-01 0.8530E-04 0.7150E-04 0.7203E-01
20 1.2558 0.0000 0.3079E-01 0.7145E-01 0.3072E-01 0.7203E-04 0.4528E-04 0.7141E-01
21 1.3953 0.0000 0.3155E-01 0.7095E-01 0.3149E-01 0.6301E-04 0.2479E-04 0.7092E-01

EXTRA OUTPUT OBTAINED
BY SETTING THE FLAG
IPRT = 1

EXAMPLE..KNEE_BLOWN_FLAP_TESTS..GENERATE MATRIX..EXCLUDE CROSS TERMS

[illegible]STANDARD OUTPUT
IPRT = 0 OR 1

| POSM | INPUT | WALL | WALL | WALL | C/L | LIFT CORRECTION | SINGULARITIES |
|---------|---------|---------|--------|--------|---------|-----------------|----------------------|
| X/B | DU/U | DU/U | DV/U | DW/U | DW/U | | X/B |
| -0.0140 | 0.0000 | 0.0034 | 0.0000 | 0.0030 | -0.0024 | 0 | 0.0000 0.6905 |
| -0.0651 | 0.0316 | 0.0176 | 0.0000 | 0.0040 | -0.0011 | 0 + | 0.0500 -1.2426 |
| -0.0372 | 0.0585 | 0.0274 | 0.0000 | 0.0000 | 0.0002 | 0 + | 0.2000 1.4384 |
| -0.0291 | 0.0761 | 0.0419 | 0.0000 | 0.0000 | 0.0025 | 0 + | 0.3500 -0.5727 |
| -0.1860 | 0.1200 | 0.0623 | 0.0000 | 0.0000 | 0.0059 | 0 + | --- |
| -0.0930 | 0.1631 | 0.0893 | 0.0000 | 0.0000 | 0.0109 | 0 + | --- |
| -0.0000 | 0.1402 | 0.1327 | 0.0000 | 0.0000 | 0.0177 | 0 + | TOTAL = 0.3136 |
| 0.0690 | 0.3211 | 0.1917 | 0.0000 | 0.0000 | 0.0243 | 0 | --- |
| 0.1395 | 0.3347 | 0.2711 | 0.0000 | 0.0000 | 0.0319 | 0 | SPAN/B = 0.8000 |
| 0.2093 | 0.3353 | 0.3304 | 0.0000 | 0.0000 | 0.0401 | 0 | G' = G/(U*SORT(B*H)) |
| 0.2791 | 0.3198 | 0.3198 | 0.0000 | 0.0000 | 0.0484 | 0 | |
| 0.3400 | 0.2335 | 0.2786 | 0.0000 | 0.0000 | 0.0560 | 0 | |
| 0.4106 | 0.1227 | 0.1350 | 0.0000 | 0.0000 | 0.0624 | 0 | |
| 0.4804 | 0.0594 | 0.0552 | 0.0000 | 0.0000 | 0.0672 | 0 | |
| 0.5074 | 0.0425 | 0.0023 | 0.0000 | 0.0000 | 0.0713 | 0 | |
| -0.0697 | -0.0093 | -0.0093 | 0.0000 | 0.0000 | 0.0732 | 0 | |
| 0.8372 | 0.0302 | -0.0063 | 0.0000 | 0.0000 | 0.0735 | 0 | |
| 0.9667 | -0.0921 | -0.0032 | 0.0000 | 0.0000 | 0.0729 | 0 | |
| 1.1163 | -0.0240 | -0.0014 | 0.0000 | 0.0000 | 0.0721 | 0 | |
| 1.2550 | -0.0195 | -0.0006 | 0.0000 | 0.0000 | 0.0715 | 0 | |
| 1.3553 | -0.0099 | -0.0003 | 0.0000 | 0.0000 | 0.0709 | 0 | |

--- BLOCKAGE : V/R= 0.5000, Z/H= 0.0000, Z/H= 0.5000

WALL POINTS --- BLOCKAGE : Y/B = 0.5000, Z/H = 0.0000 LIFT : Y/B = 0.0000,
IN CORRECTIONS : DU/U = 0.0204, DV/U = 0.6243, DELTA-CD = -0.0182
VALUES USED

VALUES USED IN CORRECTIONS : $DU/DU = 8.8284$, $DU/DU = 8.8283$, $DELTA CO = 2.2105$

| | MEASURED | CALCULATED | PERCENTAGE DIFFERENCE |
|---------|-----------|------------|-----------------------|
| 15.9950 | 2048.9431 | 4.7220 | 1.8417 |
| 1.8420 | 6.8143 | 1.1413 | 1.8417 |
| 5.7750 | 1.1135 | 1.1135 | 1.0000 |

| | | | | | | | | |
|-----------|---------|-----------|--------|--------|--------|--------|--------|--------|
| CORRECTED | 17.3580 | 2048.9431 | 4.9169 | 1.8007 | 5.7733 | 1.1133 | 1.8007 | 1.3638 |
| RESOLVED | 17.3580 | 2048.9431 | 4.9169 | 1.8007 | 5.7477 | 1.2506 | 1.8004 | 1.3638 |

| RESOLVED | 17.3502 | 220.3731 | 1.8007 | 5.7313 | 1.3238 | 1.0004 | 2.0935 |
|-----------|---------|-----------|--------|--------|--------|--------|--------|
| CLASSICAL | 18.0005 | 2048.9431 | 4.9169 | | | | |

APPENDIX 2

PROGRAM LISTING

OF FOUR

LSQTR 001
LSQTR 002
LSQTR 003
LSQTR 004
LSQTR 005
LSQTR 006
LSQTR 007
LSQTR 008
LSQTR 009
LSQTR 010
LSQTR 011
LSQTR 012
LSQTR 013
LSQTR 014
LSQTR 015
LSQTR 016
LSQTR 017
LSQTR 018
LSQTR 019
LSQTR 020
LSQTR 021
LSQTR 022
LSQTR 023
LSQTR 024
LSQTR 025
LSQTR 026
LSQTR 027
LSQTR 028
LSQTR 029
LSQTR 030
LSQTR 031
LSQTR 032
LSQTR 033
LSQTR 034
LSQTR 035
LSQTR 036
LSQTR 037
LSQTR 038
LSQTR 039
LSQTR 040
LSQTR 041
LSQTR 042
LSQTR 043
LSQTR 044
LSQTR 045
LSQTR 046
LSQTR 047
LSQTR 048
LSQTR 049
LSQTR 050
LSQTR 051
LSQTR 052
LSQTR 053
LSQTR 054

IVAX

IVAX

```

PROGRAM LSQITER
  Iterative Solution Accounting For Cross_effects Of Vortices
  and Sources. Least_Square Approach.

  Version : KBF_DATA_REDUCTION.
  TAPE7 : Load_Coefficients. Experimental And Corrected.
  TAPE8 : Matrix File
  TAPE9 : Results.      Input and Calculated Signatures. and Center_line
                        Interference Velocities.
  TAPE10: KBF Experimental Data
  TAPE11: Interference Velocities Due to Jets.
  TAPE16: INFLUENCE COEFFT MATRICES (INPUT)

  COMMON/IMAT/  UGRF(25,25),UQWL(25,25),UGCL(25,25),_CL(25,25),
    *           WGCL(25,25),WQCL(25,25),JGWL(25,25),WGWL(25,25),
    *           UGRF(25,25)
  COMMON/LMAT/  AQ(25,25),AG(25,25)
  COMMON/ARR1/  XR(25),YR(25),ZR(25),XL(25),YL(25),ZL(25),
    *           XV(25),YV(25),ZV(25),XS(25),YS(25),ZS(25),
    *           SBV(25),SBS(25),PSIV(25),ALFV(25),PSIS(25),ALFS(25),
    *           CPOWL(25),UCPWL(25),UCPRF(25),UXORF(25),UXGWL(25),
    *           WXGWL(25),ULIFT(25),UBLKS(25),GALIA(25),SIGMA(25)

  COMMON/IMAG/  B,H,LAYERS,IRF
  COMMON/SIZE/  NR,NW,NV,HS,XPVOR,XPSRC
  COMMON /BLK8/ ALFU,POU,OMU,CMU,CLU,CDU,CMU
  DIMENSION TITLE(80),VWALL(25,3),VROOF(25,3),VCNTR(25,3)
  CHARACTER TAPE7*12,TAPE9*12
  PI = 3.142592654
  RAD = PI/180.0
  DEG = 180.0/PI

  READ INPUT      *** MAIN INPUT ***

  READ (5,3000) TITLE
  READ (5,1100) ITERMAX,MATPRT,MATSAV,IPRT,KROSG,KROSQ,ICORR,JETEFCT
  READ (5,1000) SAREA,AWB,BVB
  IF(KROSG*KROSQ.EQ.0) ITERMAX = 1
  IF(MATSAV.EQ.2) GO TO 3000
  IF(MATSAV.EQ.1) GO TO 100
  CALL TAPE10(3,16)
  MATSAV = 1
  GO TO 95

  *** GEOMETRY INPUT ***

  READ (5,1100) LAYERS,IRF,NR,NW,NV,NS
  READ (5,1000) B,H,XPVOR,XPSRC
  DC 11 I = 1,NR
  READ (5,1000) XR(1),YR(1),ZR(1)
  XR(1) = XP(1)*B
  YR(1) = YP(1)*B
  ZR(1) = ZP(1)*H

  11 CONTINUE

```

```

DO 15 I = 1,MV
  READ (5,1000) XL(I),YL(I),ZL(I)
  XL(I) = XL(I)*B
  YL(I) = YL(I)*B
  ZL(I) = ZL(I)*H
15 CONTINUE
DO 20 I = 1,NV
  READ (5,1000) XV(I),YV(I),ZV(I),SBV(I),PSIV(I),ALFV(I)
  XV(I) = XV(I)*B
  YV(I) = YV(I)*B
  ZV(I) = ZV(I)*H
  SBV(I) = SBV(I)*B
  PSIV(I) = PSIV(I)*RAD
  ALFV(I) = ALFV(I)*RAD
20 CONTINUE
DO 25 I = 1,NS
  READ (5,1000) XS(I),YS(I),ZS(I),SBS(I),PSIS(I),ALFS(I)
  XS(I) = XS(I)*B
  YS(I) = YS(I)*B
  ZS(I) = ZS(I)*H
  SBS(I) = SBS(I)*B
  PSIS(I) = PSIS(I)*RAD
  ALFS(I) = ALFS(I)*RAD
25 CONTINUE
C- SET UP SOURCE_INFLUENCE MATRICES
C-
  MINIT = 0
  DO 60 J = 1,NS
    XPIV = XPSRC*SBS(J)
    CALL PIVOT(XS(J),YS(J),ZS(J),XPIV,SBS(J)/2.0,PSIS(J),ALFS(J),
      * XL,YL,ZL,
      * X1,Y1,Z1,X2,Y2,Z2)
    C....CROSS EFFECT SOURCE/(ROOF - FLOOR)
    U3 = 0.
    U4 = 0.
    DO 40 I = 1,NR
      CALL INFLU(X1,Y1,Z1,X2,Y2,Z2,0.5,1,MINIT,1,
        * XR(I),YR(I),ZR(I),U1,V1,W1)
      CALL INFLU(X2,Y2,Z2,X1,Y1,Z1,0.5,1,MINIT,1,
        * XR(I),YR(I),ZR(I),U2,V2,W2)
      IF (IRF.EQ.0) GO TO 38
      CALL INFLU(X1,Y1,Z1,X2,Y2,Z2,0.5,1,MINIT,1,
        * XR(I),YR(I),ZR(I),U3,V3,W3)
      CALL INFLU(X2,Y2,Z2,X1,Y1,Z1,0.5,1,MINIT,1,
        * XR(I),YR(I),ZR(I),U4,V4,W4)
38 UGRF(I,J) = U1+U2-('J3+U4)
40 CONTINUE
C....DIRECT EFFECT. SOURCE/WALL
DO 50 I = 1,NW
  CALL INFLU(X1,Y1,Z1,X2,Y2,Z2,0.5,1,MINIT,1,
    * XL(I),YL(I),ZL(I),U1,V1,W1)
  CALL INFLU(X2,Y2,Z2,X1,Y1,Z1,0.5,1,MINIT,1,
    * XL(I),YL(I),ZL(I),U2,V2,W2)
  UGWL(I,J) = U1+U2
50 CONTINUE

```

```

C... CENTER_LINE INTERFERENCE MATRIX.(X CORRESPONDS TO WALL POINTS)
DO 55 I = 1,NV
CALL INFLU(X1,Y1,Z1, X2,Y2,Z2, 0.5, 1, 1, 1,
* XL(I),0.0,0.0,0.0, U1,V1,W1)
CALL INFLU(X2,-Y2,Z2, X1,-Y1,Z1,0.5, 1, 1, 1,
* XL(I),0.0,0.0,0.0, U2,V2,W2)
UGCL(I,J) = U1+U2
VOCL(I,J) = V1+W2
55 CONTINUE
60 CONTINUE
C- SET UP INFLUENCE MATRICES FOR VORTICES
C-
DO 90 J = 1,NV
XPIV = XPVOR*SBV(J)
CALL PIVOT(XV(J),YV(J),ZV(J), XPIV, SBV(J)/2.0,"SIV(J),ALFV(J),
* X1,Y1,Z1, X2,Y2,Z2)
C...DIRECT EFFECT. VORTEX/(ROOF - FLOOR)
U3 = 0.
U4 = 0.
DO 70 I = 1,NR
CALL INFLU(X1,Y1,Z1, X2,Y2,Z2, 1.0, 2, MINIT, 1,
* XR(I),VR(I),ZR(I), U1,V1,W1)
CALL INFLU(X2,-Y2,Z2, X1,-Y1,Z1, 1.0, 2, MINIT, 1,
* XR(I),VR(I),ZR(I), U2,V2,W2)
IF(IRF.EQ.0) GO TO 68
CALL INFLU(X1,Y1,Z1, X2,Y2,Z2, 1.0, 2, MINIT, 1,
* XR(I),VR(I),ZR(I), U3,V3,W3)
CALL INFLU(X2,-Y2,Z2, X1,-Y1,Z1, 1.0, 2, MINIT, 1,
* XR(I),VR(I),ZR(I), U4,V4,W4)
68 UGRF(I,J) = U1+U2-(U3+U4)
70 CONTINUE
C...CROSS EFFECT. VORTEX/WALL
DO 80 I = 1,NW
CALL INFLU(X1,Y1,Z1, X2,Y2,Z2, 1.0, 2, MINIT, 1,
* XL(I),YL(I),ZL(I), U1,V1,W1)
CALL INFLU(X2,-Y2,Z2, X1,-Y1,Z1, 1.0, 2, MINIT, 1,
* XL(I),YL(I),ZL(I), U2,V2,W2)
UGWL(I,J) = U1+U2
WGWL(I,J) = V1+W2
80 CONTINUE
C... CENTER_LINE INTERFERENCE MATRIX.(X CORRESPONDS TO WALL POINTS)
DO 85 I = 1,NW
CALL INFLU(X1,Y1,Z1, X2,Y2,Z2, 1.0, 2, 1, 1,
* XL(I),0.0,0.0,0.0, U1,V1,W1)
CALL INFLU(X2,-Y2,Z2, X1,-Y1,Z1, 1.0, 2, 1, 1,
* XL(I),0.0,0.0,0.0, U2,V2,W2)
UGCL(I,J) = U1+U2
WGCL(I,J) = V1+W2
85 CONTINUE
90 CONTINUE
C- FORM [A]_INVERSE FOR SOURCE/WALL
C-
95 EPS = 0.0

```

```

165 LSQTR
166 LSQTR
167 LSQTR
168 LSQTR
169 LSQTR
170 LSQTR
171 LSQTR
172 LSQTR
173 LSQTR
174 LSQTR
175 LSQTR
176 LSQTR
177 LSQTR
178 LSQTR
179 LSQTR
180 LSQTR
181 LSQTR
182 LSQTR
183 LSQTR
184 LSQTR
185 LSQTR
186 LSQTR
187 LSQTR
188 LSQTR
189 LSQTR
190 LSQTR
191 LSQTR
192 LSQTR
193 LSQTR
194 LSQTR
195 LSQTR
196 LSQTR
197 LSQTR
198 LSQTR
199 LSQTR
200 LSQTR
201 LSQTR
202 LSQTR
203 LSQTR
204 LSQTR
205 LSQTR
206 LSQTR
207 LSQTR
208 LSQTR
209 LSQTR
210 LSQTR
211 LSQTR
212 LSQTR
213 LSQTR
214 LSQTR
215 LSQTR
216 LSQTR
217 LSQTR
218 LSQTR
219 LSQTR

DO 110 I = 1, NS
DO 110 J = 1, NS
AQ(I, J) = 0.0
DO 100 K = 1, NV
AQ(I, J) = AQ(I, J) + UQWL(K, I) * UQWL(K, J)
CONTINUE
100 CONTINUE
110 IERR = 0
CALL GJRV(AQ, NS, 25, EPS, IERR)
IF(IERR .NE. 0) GO TO 310

C- FORM [A]_INVERSE FOR VORTICES/ROOF
C-

EPS = 0.0
DO 210 I = 1, NV
DO 210 J = 1, NV
AG(I, J) = 0.0
DO 200 K = 1, NR
AG(I, J) = AG(I, J) + UGRF(K, I) * UGRF(K, J)
CONTINUE
200 CONTINUE
210 IERR = 0
CALL GJRV(AG, NV, 25, EPS, IERR)
IF(IERR .NE. 0) GO TO 310

C- OPTIONALLY PRINT/SAVE MATRICES
C-
300 IF(MATSAV .NE. 0) CALL TAPEIO(MATSAV, 8)
IF(IPRT .EQ. 0) GO TO 305
WRITE (6, 3100) TITLE
WRITE (6, 3200) B, H, LAYERS
305 IF(MATPRT .EQ. 0) GO TO 320
CALL OUT(UGRF, 25, 25, NR, NV, 'U_GAMA_ROOF', 11)
CALL OUT(UQWL, 25, 25, NR, NS, 'U_SORC_WALL', 11)
CALL OUT(UGRF, 25, 25, NR, NS, 'U_SORC_ROOF', 11)
CALL OUT(UQWL, 25, 25, NR, NV, 'U_GAMA_WALL', 11)
CALL OUT(UQWL, 25, 25, NR, NV, 'V_GAMA_WALL', 11)
IF(IERR .NE. 0) STOP

*** TEST SIGNATURE INPUT ***

C- READ_IN RUN NUMBER AND WALL SIGNATURES
C- SET_UP BOUNDARY CONDITIONS
C-
*****
The structure of the program for INPUTting run identification
and wall signatures in the next 15 statements are for the
Knee-Blown_Flap experiments of LOCKHEED_GEOGIA. The user
should make appropriate changes in this section and re-write
subroutine READCP- to define the arrays "UCPRF" and "UCPWL"
as indicated below:
UCPRF(I) = (U, ROOF(I) - U, FLOOR(I), if IRF = 1
UCPWL(I) = (U, WALL(I) + U, WALL2(I))/2, if IRF = 0
UCPWL(I) = (U, WALL(I) + U, WALL2(I))/2
C- READ (5, 1100, END=999) ITEST, IRUN, IPMIN, IPHAX, IFLOOR, IROOF,
320

```

ORIGINAL SOURCE
OF POOR QUALITY

```

      IVAL1, IVAL2
      ENCODE(12,325,TAPE7) IRUN
      ENCODE(12,326,TAPE9) IRUN
      FORMAT ('KBERUN',12,'.DAT')
      FORMAT ('KBFSIG',12,'.DAT')
      OPEN(UNIT=7,NAME=TAPE7,STATUS='NEW')
      OPEN(UNIT=9,NAME=TAPE9,STATUS='NEW')
      IPDO = IPMIN-1
      IPDO = IPDO+1
      IF(IPDO.GT. IPMAX) GO TO 600
      IP = IPDO
      CALL READCP(UCPRF, NR, IRUN, IP, IFLOOR, IROOF, 1, IRF)
      IF(IRUN.LT. 0) GO TO 600
      IF(IP.EQ. 0) GO TO 330
      CALL READCP(UCPWL, NW, IRUN, IP, IVAL1, IVAL2, 0, IRF)
      *****
      IF(IPRT.NE. 0) WRITE (6,4400) IRUN,IP
      IF(IPRT.NE. 0) WRITE (6,3000)
      DO 370 I = 1,NR
      UXORF(I) = 0.0
      IF(IPRT.NE. 0) WRITE (6,1200) I,XR(I)/8,YR(I)/8,ZR(I)/H,
      UCPWF(I)
      370 CONTINUE
      C-
      C-
      IF(IPRT.NE. 0) WRITE (6,3400)
      DO 380 I = 1,NV
      CPOWL(I) = 1.0-(UCPWL(I)+1.0)**2
      IF(IPRT.NE. 0) WRITE (6,1200) I,XL(I)/8,YL(I)/8,ZL(I)/H, UCPWL(I)
      380 CONTINUE
      C-
      C- BEGIN ITERATIVE CYCLE
      C-
      ITER = 0
      ITER = ITER + 1
      IF(IPRT.NE. 0) WRITE (6,3500) ITER
      400
      C- SUBTRACT CROSS-INFLUENCE OF SOURCES FROM ROOF SIGNATURE AND
      C- FORM LEAST_SQUARE COLUMN VECTOR FOR VORTICES
      C-
      DO 410 I = 1,NV
      ULIFT(I) = 0.0
      DO 410 K = 1,NR
      ULIFT(I) = ULIFT(I) + UGRF(K,I)*(UCPRF(K)-UXORF(K))
      410
      C- COMPUTE GAMA'S
      C-
      GTOT = 0.0
      DO 425 I = 1,NV
      GAMA(I) = 0.0
      DO 420 J = 1,NV
      GAMA(I) = GAMA(I) + AG(I,J)*ULIFT(J)
      GTOT = GTOT + GAMA(I)/SORT(B*H)
      420
      425 CONTINUE
      C-

```

```

C- COMPUTE CROSS_EFFECT OF GAMA'S ON SIDE_WALL
C-
DO 438 I = 1,NV
  UXGWL(I) = 0.0
  WXGWL(I) = 0.0
  IF(KROSG.EQ.0) GO TO 438
DO 438 J = 1,NV
  UXGWL(I) = UXGWL(I) + UGWL(I,J)*GAMA(J)
  WXGWL(I) = WXGWL(I) + WGWL(I,J)*GAMA(J)
438 CONTINUE
C- SUBTRACT CROSS_INFLUENCE OF GAMA'S FROM WALL SIGNATURE AND
C- FORM LEAST_SQUARE COLUMN VECTOR FOR SOURCES
C-
  FACTOR = 1.0
  CONTINUE
DO 440 I = 1,NS
  UBLKG(I) = 0.0
DO 440 K = 1,NV
  UTEMP = 1.0 - CPOWL(K) - FACTOR*WXGWL(K)**2
  IF(UTEMP.GT.0.0) GO TO 438
  IF(FACTOR.LE.0.1E-06) GO TO 610
  FACTOR = 0.0
  GO TO 438
438 UTEMP = SORT(UTEMP) - UXGWL(K) - 1.0
  UBLKG(I) = UBLKG(I) + UQWL(K,I)*UTEMP
440 CONTINUE
C- COMPUTE SIGMA'S
C-
  QTOT = 0.0
DO 455 I = 1,NS
  SIGMA(I) = 0.0
DO 455 J = 1,NS
  SIGMA(I) = SIGMA(I) + AQ(I,J)*UBLKG(J)
450 CONTINUE
  QTOT = QTOT + SIGMA(I)/(B*H)
455 CONTINUE
C- PRINT OUT GAMA'S, SIGMA'S AND CROSS_EFFECT TERMS
C-
  IF(IPRT.EQ.0) GO TO 490
  WRITE(6,3600)
  WRITE(6,3700)
DO 460 I = 1,NV
  GP = GAMA(I)/SORT(B*H)
  WRITE(6,1300) I,XV(I)/B,YV(I)/B,ZV(I)/H,
  * SBV(I)/B,PSIV(I)/RAD,ALFV(I)/RAD,GP
460 CONTINUE
  WRITE(6,3900) GTOT
  WRITE(6,3800)
  WRITE(6,3700)
DO 465 I = 1,NS
  OP = SIGMA(I)/(B*H)
  WRITE(6,1300) I,XS(I)/B,YS(I)/B,ZS(I)/H.

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

*
465 CONTINUE
WRITE (6,3988) QTOT
IMAX = NR
IF(NW .GT. IMAX) IMAX = NW
WRITE (6,4388)
DO 478 I = 1,IMAX
WRITE (6,1488) I,UXORF(I),UXGWL(I),WXGWL(I)
IF((I.8 - CPOUL(I) - UXGWL(I)*2) .LT. 8.8) WRITE (6,1688)
478 CONTINUE
IF(FACTOR .LE. 8.1E-86) WRITE (6,6488)
C- RE_CALCULATE WALL BOUNDARY CONDITIONS, U , ON ROOF
C-
WRITE (6,4888)
DO 518 I = 1,NR
VROOF(I,1) = 8.8
DO 588 J = 1,NV
VROOF(I,1) = VROOF(I,1) + UGRF(I,J)*GAMA(J)
IF(KROSSG .EQ. 8) GO TO 586
DO 585 J = 1,NS
VROOF(I,1) = VROOF(I,1) + UORF(I,J)*SIGMA(J)
585 VROOF(I,1) = VROOF(I,1)*2 - 2.8*VROOF(I,1)
586 CPC = -VROOF(I,1)*2 - 2.8*VROOF(I,1)
IF(IPRT .NE. 8) WRITE (6,1288) I,XR(I)/B,YR(I)/B,ZR(I)/H,
VROOF(I,1),CPC
*
518 CONTINUE
C- RE_CALCULATE BOUNDARY CONDITIONS U & V ON SIDE WALL
C-
IF(IPRT .NE. 8) WRITE (6,4188)
DO 538 I = 1,NW
VWALL(I,1) = 8.8
VWALL(I,3) = 8.8
DO 528 J = 1,NS
VWALL(I,1) = VWALL(I,1) + UOWL(I,J)*SIGMA(J)
IF(KROSSG .EQ. 8) GO TO 528
DO 525 J = 1,NV
VWALL(I,1) = VWALL(I,1) + UGWL(I,J)*GAMA(J)
VWALL(I,3) = VWALL(I,3) + VGWL(I,J)*GAMA(J)
525 ULIFT(I) = -(FACTOR*VWALL(I,3)*2+VWALL(I,1)*2+2.8*VWALL(I,1))
528 IF(IPRT .NE. 8) WRITE (6,1288) I,XL(I)/B,YL(I)/B,ZL(I)/B,
VWALL(I,1),VWALL(I,3),ULIFT(I)
*
538 CONTINUE
C- OBTAIN CENTER_LINE INTERFERENCE VELOCITIES
C-
IF(ITER .EQ. ITERM) WRITE (9,1188) ITRUN,IP,RW
IF(IPRT .NE. 8) WRITE (6,4288)
VCENTER = 8.
ZCENTER = 8.
DO 578 I = 1,NW
UGCIL = 8.8
WCCIL = 8.8
DO 558 J = 1,NS
UOCTL = UOCTL + UOCL(I,J)*SIGMA(J)

```

LSQTR 330
LSQTR 331
LSQTR 332
LSQTR 333
LSQTR 334
LSQTR 335
LSQTR 336
LSQTR 337
LSQTR 338
LSQTR 339
LSQTR 340
LSQTR 341
LSQTR 342
LSQTR 343
LSQTR 344
LSQTR 345
LSQTR 346
LSQTR 347
LSQTR 348
LSQTR 349
LSQTR 350
LSQTR 351
LSQTR 352
LSQTR 353
LSQTR 354
LSQTR 355
LSQTR 356
LSQTR 357
LSQTR 358
LSQTR 359
LSQTR 360
LSQTR 361
LSQTR 362
LSQTR 363
LSQTR 364
LSQTR 365
LSQTR 366
LSQTR 367
LSQTR 368
LSQTR 369
LSQTR 370
LSQTR 371
LSQTR 372
LSQTR 373
LSQTR 374
LSQTR 375
LSQTR 376
LSQTR 377
LSQTR 378
LSQTR 379
LSQTR 380
LSQTR 381
LSQTR 382
LSQTR 383
LSQTR 384

ORIGINAL DOCUMENT
OF POOR QUALITY

LSQTR 385
LSQTR 386
LSQTR 387
LSQTR 388
LSQTR 389
LSQTR 390
LSQTR 391
LSQTR 392
LSQTR 393
LSQTR 394
LSQTR 395
LSQTR 396
LSQTR 397
LSQTR 398
LSQTR 399
LSQTR 400
LSQTR 401
LSQTR 402
LSQTR 403
LSQTR 404
LSQTR 405
LSQTR 406
LSQTR 407
LSQTR 408
LSQTR 409
LSQTR 410
LSQTR 411
LSQTR 412
LSQTR 413
LSQTR 414
LSQTR 415
LSQTR 416
LSQTR 417
LSQTR 418
LSQTR 419
LSQTR 420
LSQTR 421
LSQTR 422
LSQTR 423
LSQTR 424
LSQTR 425
LSQTR 426
LSQTR 427
LSQTR 428
LSQTR 429
LSQTR 430
LSQTR 431
LSQTR 432
LSQTR 433
LSQTR 434
LSQTR 435
LSQTR 436
LSQTR 437
LSQTR 438
LSQTR 439

```

550      WQCTL = WQCTL + WQCL(I,J)*SIGMA(J)
      CONTINUE
      UGCTL = 0.0
      WGCTL = 0.0
      DO 560 J = 1,NV
      UGCL(I,J)*GAMA(J)
      UGCTL = UGCTL + UGCL(I,J)*GAMA(J)
      WGCTL = WGCTL + WGCL(I,J)*GAMA(J)
      CONTINUE
      VCNTR(I,1) = UGCTL + UGCTL
      VCNTR(I,3) = WQCTL + WQCTL
      IF(IPRT.NE.0) WRITE(6,1200) I,XL(I)/B,YCENTER,ZCENTER,WQCTL,WGCTL
      * IF(ITER.EQ.ITERMAX) WRITE(9,1500) I,XL(I)/B,COWL(I),ULIFT(I),
      * VCNTR(I,1),UCPRF(I),VROOF(I,1),VCNTR(I,3)
570      CONTINUE
C- TERMINATE IF REQUIRED NO OF ITERATIONS HAVE BEEN PERFORMED.
C- OTHERWISE, DETERMINE CROSS-INFLUENCE U DUE TO SOURCES ON ROOF
C- AND CONTINUE ITERATIONS.
      IF(ITER.GE.ITERMAX) GO TO 590
      DO 580 I = 1,NR
      UXORF(I) = 0.0
      IF(KROSO.EQ.0) GO TO 580
      DO 580 J = 1,NS
      UXORF(I) = UXORF(I) + UORF(I,J)*SIGMA(J)
      CONTINUE
      GO TO 400
580      CONTINUE
      IPASS = 1
      IF(IJTEFCT.EQ.0) WRITE(6,6100)ITITLE,ITEST,IRUN,IP
      IF(IJTEFCT.NE.0) WRITE(6,6110)ITITLE,ITEST,IRUN,IP
      CALL OUTPUT(NV,NS,XS,SBS(I),0,
      * UCPWL,XL,SIGMA,VCNTR,VWALL,ICORR,IPASS-1)
      * CALL OUTPUT(NR,NV,XV,SBV(I),1,
      * UCPRF,XR,GAMA,VCNTR,VROOF,ICORR,IPASS-1)
C- CORRECT ALL MEASURED QUANTITIES
C-
590      FACT = (1.0+DU)**2
      QCC = QOU*FACT
      CMUC = CMUU/FACT
      CLC = CLU/FACT
      CMC = CMU/FACT
      DELA = DW/(1.0+DU)
      ALFC = ALFU + DELA*DEG
      BHYS = B*H/SAREA
      DELCO = -BHYS*QTOT**2
      CDC = (CDU-DELCD)/FACT
      SINA = SIN(DELA)
      COSA = COS(DELA)
      CD = CDC*COSA + CLC*SINA
      CL = CLC*COSA - CDC*SINA
C-

```

ORIGINAL OF POOR QUALITY

```

WRITE (6,6448) VL(ICORR)/B,ZL(ICOPR)/H, VR(ICORR)/B,ZR(ICORR)/H,
  DU,DW,DELCD
WRITE (6,6449) ALFU,POU,QUU,CMUU,CLU,CDU,CMU
WRITE (6,6450) ALFC,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6451) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6452) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6453) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6454) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6455) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6456) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6457) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6458) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6459) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6460) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6461) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6462) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6463) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6464) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6465) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6466) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6467) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6468) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6469) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6470) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6471) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6472) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6473) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6474) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6475) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6476) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6477) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6478) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6479) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6480) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6481) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6482) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6483) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6484) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6485) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6486) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6487) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6488) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6489) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6490) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6491) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6492) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6493) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG
WRITE (6,6494) ALFP,POU,QOC,CMUC,CLC,CD,CMC,DELA*DEG

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

3X, I, 7X, X/B, 7X, Y/B, 7X, Z/H, 7X, U_WALL //
3500 FORMAT (//, 13(1H-), 12/1H, 13(1H-))
3600 FORMAT (//, VORTEX STRENGTHS. (STR = G/(U*SQRT(B*H))) //)
3700 FORMAT (//, 3X, I, 7X, X/B, 7X, Y/B, 7X, Z/H, 4X, SPAN/B,
5X, SWEEP, 5X, PITCH, 10X, STR //)
3800 FORMAT (//, SOURCE STRENGTHS. (STR = G/(U*B*H)) //)
3900 FORMAT (//, 60X, TOTAL, E12.4 //)
4000 FORMAT (//, RE_CALCULATED BOUNDARY CONDITIONS ON ROOF //
3X, I, 7X, X/B, 7X, Y/B, 7X, Z/H,
8X, U_WALL, 5X, CP_WALL //)
4100 FORMAT (//, RE_CALCULATED BOUNDARY CONDITIONS ON WALL //
3X, I, 7X, X/B, 7X, Y/B, 7X, Z/H,
8X, U_WALL, 6X, U_WALL, 5X, CP_WALL //)
4200 FORMAT (//, CENTER LINE INTERFERENCE VELOCITIES //
3X, I, 7X, X/B, 7X, Y/B, 7X, Z/H,
8X, U_WALL, 6X, U_WALL, 7X, U_WALL, 6X, U_WALL,
7X, U_WALL, 6X, U_WALL //)
4300 FORMAT (//, CROSS_EFFECT TERMS // 9X, U_WALL, 3X,
U_WALL, 3X, U_WALL //)
4400 FORMAT (//, RUN NUMBER, 13, POINT NUMBER, 13/1X, 38(1H-))
C
5100 FORMAT (1H1, 80A1, TEST, 12, RUN, 12, POINT, 12)
6110 FORMAT (1MODEL ONLY, 2X, 80A1, TEST, 12, RUN, 12, POINT,
12)
6120 FORMAT (1MODEL WITH JET, 2X, 80A1, TEST, 12, RUN, 12,
POINT, 12)
6400 FORMAT (19X, ALFA, 6X, PNOT, 6X, QNOT, 7X, CMU, 8X,
CL, 8X, CD, 8X, CM)
6410 FORMAT (MEASURED, .8F10.4)
6420 FORMAT (CORRECTED, .8F10.4)
6430 FORMAT (RESOLVED, .8F10.4)
6431 FORMAT (CLASSICAL, .8F10.4)
6440 FORMAT (WALL POINTS --- BLOCKAGE : Y/B=, F7.4, Z/H=, F7.4,
LIFT : Y/B=, F7.4, Z/H=, F7.4,
VALUES USED IN CORRECTIONS : DU/U=, F7.4, DW/U=,
F7.4, DELTA-CD=, F7.4)
6450 FORMAT (//, *** SORT OF NEGATIVE NUMBER WHILE COMPUTING
U_WALL_EFFECTIVE *** //)
6460 FORMAT (43X, ***** : SORT OF NEGATIVE NUMBER WHILE COMPUTING
U_WALL_EFFECTIVE /50X, CROSS_TERM W_G_WALL IGNORED
AT ALL POINTS //)
C
C
END
```

ORIGINAL PAGE IS
OF POOR QUALITY

PIVOT 001
PIVOT 002
PIVOT 003
PIVOT 004
PIVOT 005
PIVOT 006
PIVOT 007
PIVOT 008
PIVOT 009
PIVOT 010
PIVOT 011
PIVOT 012
PIVOT 013
PIVOT 014
PIVOT 015
PIVOT 016
PIVOT 017

```

      SUBROUTINE PIVOT(X,Y,Z, XPIV,SP,PSI,ALFA, X1,Y1,Z1,
      X2,Y2,Z2)
      *
      C DETERMINES THE END POINTS OF A LINE OF LENGTH "SP",
      C WHEN IT IS PITCHED AND YAWED.
      C
      TAMP = TAN(PSI)
      SINA = SIN(ALFA)
      COSA = COS(ALFA)
      X1 = X + XPIV*(1.0-COSA)
      Y1 = Y + XPIV*SINA
      Z1 = Z + XPIV*(1.0-COSA) + SP*TAMP*COSA
      X2 = X + XPIV*(1.0-COSA) + SP
      Y2 = Y + SP
      Z2 = Z - (SP*TAMP-XPIV)*SINA
      RETURN
      END

```

OF POOR QUALITY

```

SUBROUTINE INFLU(X1,Y1,Z1, X2,Y2,Z2, STRENT,ITYP,MINIT,ITRUNC,
1      XP,YP,ZP, DU,DV,DW)
C
C PARAMETERS:
C   X1,Y1,Z1 : Line_singularity End Point Co-ordinates, First Point
C   X2,Y2,Z2 : Line_singularity End Point Co-ordinates, Second Point
C   STRENT   : Singularity Strength (Total for ITYP=2,3
C               Per unit length for ITYP=2)
C   ITYP     : Type Of Singularity... 1=Source/Sink,
C               2=Horse-Shoe Vortex,
C               (GAMA +ve Y1 TO Y2)
C               3=Doublet.
C   MINIT    : Initial Image Layer (=0 To Include Model In Tunnel)
C   XP,YP,ZP : Calculation Point
C   DU,DV,DW : Incremental Velocity Components, RETURNED.
C
COMMON /INAG/ B,H,LAYERS,IRF
COMMON /DIRC/ DCXO,DCYO,DCZO
IRUG = 0
IS = -1
DU = 0.0
DV = 0.0
DW = 0.0
DCX = DCXO
DCY = DCYO
XINF = 10000.0*B
STPERL = STRENT
IF(ITYP.EQ.2) GO TO 5
ELS = SQRT( (X2-X1)**2 + (Y2-Y1)**2 + (Z2-Z1)**2 )
STPERL = STRENT/ELS
5  LMAX = LAYERS + 1
DO 30 LDO = 1,LMAX
FAC = 1.0
L = LDO-1
IF(L.LT. MINIT) GO TO 30
IF(LDO.EQ.LMAX .AND. L.GT.0) FAC = 0.5 + 1.0/FLOAT(4*L)
IF(ITYP .NE. 2) FAC = 1.0
MND0 = L*2 + 1
NOT = L + 1
MNI = MND0 - 1
C
DO 20 MDO = 1,MND0
M = MDO - NOT
REVW = (IS)**(IABS(M))
VONE = FLOAT(M)*B + REVW*Y1
VTVO = FLOAT(M)*B + REVW*Y2
C
MINC = MNI
IF(MDO.EQ.1 .OR. MDO.EQ.MND0) MINC = 1
DO 20 MDO = 1,MND0,NINC
N = MDO - NOT
REVW = (IS)**(IABS(N))
X2IM = X2

```

INFLU 001
INFLU 002
INFLU 003
INFLU 004
INFLU 005
INFLU 006
INFLU 007
INFLU 008
INFLU 009
INFLU 010
INFLU 011
INFLU 012
INFLU 013
INFLU 014
INFLU 015
INFLU 016
INFLU 017
INFLU 018
INFLU 019
INFLU 020
INFLU 021
INFLU 022
INFLU 023
INFLU 024
INFLU 025
INFLU 026
INFLU 027
INFLU 028
INFLU 029
INFLU 030
INFLU 031
INFLU 032
INFLU 033
INFLU 034
INFLU 035
INFLU 036
INFLU 037
INFLU 038
INFLU 039
INFLU 040
INFLU 041
INFLU 042
INFLU 043
INFLU 044
INFLU 045
INFLU 046
INFLU 047
INFLU 048
INFLU 049
INFLU 050
INFLU 051
INFLU 052
INFLU 053
INFLU 054

ORIGINAL
OF PAGE 100

```

X1IM = X1
Y1IM = YONE
Y2IM = Y2WO
Z1IM = FLOAT(N)*H + REVN*Z1
Z2IM = FLOAT(N)*H + REVN*Z2
IF(REVN*REVN .GT. 0) GO TO 10

C
TEMP = Y2IM
Y2IM = Y1IM
Y1IM = TEMP
TEMP = Z2IM
Z2IM = Z1IM
Z1IM = TEMP
TEMP = X2IM
X2IM = X1IM
X1IM = TEMP

C 10 DCY = DCYO*REVN
DCZ = DCZO*REVH

C
IF(ITYP-2) 11,12,13
11 CALL LNSCGN(X1IM,Y1IM,Z1IM,X2IM,Y2IM,Z2IM,STPERL,
  1 XP,YP,ZP,DELU,DELV,DELV)
GO TO 16
12 CALL LNVXGN(X1IM,Y1IM,Z1IM,X1F,Y1IM,Z1IM,STPERL,
  1 XP,YP,ZP,DUT1,DVT1,DELV)
CALL LNVXGN(X2IM,Y2IM,Z2IM,X1F,Y1IM,Z1IM,STPERL,
  1 XP,YP,ZP,DUBN,DVBN,DELV)
CALL LNVXGN(X1F,Y2IM,Z2IM,X2IM,Y2IM,Z2IM,STPERL,
  1 XP,YP,ZP,DUT2,DVT2,DELV)
DELU = DUT1 + DUBN + DVT2
DELV = DVT1 + DVBN + DVT2
DELV = DVT1 + DVBN + DVT2
GO TO 16
13 CALL LND8GN(X1IM,Y1IM,Z1IM,X2IM,Y2IM,Z2IM,STPERL,
  1 DCX,DCY,DCZ,XP,YP,ZP,DELU,DELV,DELV,
  2 VMUR,CXR,CZR)
16 DU = DU + FAC*DELU
DV = DV + FAC*DELV
DW = DW + FAC*DELV
IF(18UG .NE. 0) WRITE (6,600) M,N,XP,YP,ZP,DELU,DELV,DELV,DU,DV,DW
600 FORMAT (2I4,3X,3F8.3,2(2X,3E14.6))
20 CONTINUE
30 CONTINUE

C- ADD TRUNCATION SHEET FOR SOURCE/SINK
C
IF(1TRUNC .EQ. 0) RETURN
IF(LAYERS.EQ.0 .OR. 1ITYP.NE.1) RETURN
QBH = STRENT/(2.0*8*H)
PI = 3.141592654
XM = (X1+X2)/2.0
XX = XP - XM
SIGNX = SIGN(1.0, XX)
IF(ABS(XX) .LT. 0.1E-06) SIGNX = 0.0

```

INFLU 055
INFLU 056
INFLU 057
INFLU 058
INFLU 059
INFLU 060
INFLU 061
INFLU 062
INFLU 063
INFLU 064
INFLU 065
INFLU 066
INFLU 067
INFLU 068
INFLU 069
INFLU 070
INFLU 071
INFLU 072
INFLU 073
INFLU 074
INFLU 075
INFLU 076
INFLU 077
INFLU 078
INFLU 079
INFLU 080
INFLU 081
INFLU 082
INFLU 083
INFLU 084
INFLU 085
INFLU 086
INFLU 087
INFLU 088
INFLU 089
INFLU 090
INFLU 091
INFLU 092
INFLU 093
INFLU 094
INFLU 095
INFLU 096
INFLU 097
INFLU 098
INFLU 099
INFLU 100
INFLU 101
INFLU 102
INFLU 103
INFLU 104
INFLU 105
INFLU 106
INFLU 107
INFLU 108
INFLU 109

ORIGIN
OF PAGE

INFLU 110
INFLU 111
INFLU 112
INFLU 113
INFLU 114
INFLU 115
INFLU 116
INFLU 117
INFLU 118
INFLU 119
INFLU 120

LFUNCS 001
LFUNCS 002
LFUNCS 003
LFUNCS 004
LFUNCS 005
LFUNCS 006
LFUNCS 007
LFUNCS 008
LFUNCS 009
LFUNCS 010
LFUNCS 011
LFUNCS 012
LFUNCS 013
LFUNCS 014
LFUNCS 015
LFUNCS 016
LFUNCS 017
LFUNCS 018
LFUNCS 019
LFUNCS 020
LFUNCS 021
LFUNCS 022
LFUNCS 023
LFUNCS 024
LFUNCS 025
LFUNCS 026
LFUNCS 027
LFUNCS 028
LFUNCS 029
LFUNCS 030

```

YR = LAYERS*B + B/2.
ZU = LAYERS*H + H/2.
YL = -YR
ZL = -ZU
TF = TFUNC(XX,VP,ZP, YL,ZL, YR,ZU)
CALL LFUNCS(XX,VP,ZP, YL,ZL, YR,ZU, FL1,FL2)
DU = DU + QBH + QBH*(SIGNX-TF/(2.0*PI))
DV = DV + QBH*FL1/(2.0*PI)
DW = DW + QBH*FL2/(2.0*PI)
RETURN
END

SUBROUTINE LFUNCS (XX,Y,Z,Y1,Z1,Y2,Z2,L1F,L2F)
C --- RETURNS L1 AND L2 FUNCTIONS FOR CALCULATION OF V AND W VELOCITIES
C --- RESPECTIVELY AT POINT XX,Y,Z DUE TO THE EDGES Y1,Z1,Y2,Z2 OF A
C --- RECTANGULAR HOLE IN AN INFINITE SHEET SOURCE AT XX=0
C ---
REAL N1,N2,N3,N4,L1F,L2F
DV=Y2-Y1
DZ=Z2-Z1
XO=XX*XX
Y10=(Y-Y1)**2
Y20=(Y-Y2)**2
Z10=(Z-Z1)**2
Z20=(Z-Z2)**2
R1=SQRT(XQ+Y10+Z20)
R2=SQRT(XQ+Y20+Z20)
R3=SQRT(XQ+Y20+Z10)
R4=SQRT(XQ+Y10+Z10)
N1=R4+R1-DZ
N2=R2+R3+DZ
N3=R3+R4-DY
N4=R1+R2+DY
D1=R4+R1+DZ
D2=R2+R3-DZ
D3=R3+R4+DY
D4=R1+R2-DY
L1F=ALOG(N1*N2/(D1*D2))
L2F=ALOG(N3*N4/(D3*D4))
RETURN
END

```

ORIGINAL OF PAPER

```

C --- FUNCTION TFUNC (XX,Y,Z,Y1,Z1,Y2,Z2)
C --- RETURNS FUNCTION-T FOR COMPUTATION OF U-VELOCITY AT POINT XX,Y,Z
C --- DUE TO A FINITE RECTANGULAR SHEET SOURCE Y1 Z1 Y2 Z2 AT XX=0
C ---
      DIMENSION SIGN(4),YY(4),ZZ(4)
      SUM=0.
      IF (ABS(XX).LT..00000001) GO TO 2
      SIGN(1)=1.
      SIGN(2)=-1.
      SIGN(3)=-1.
      SIGN(4)=1.
      YY(1)=Y-Y1
      YY(2)=YY(1)
      YY(3)=Y-Y2
      YY(4)=YY(3)
      ZZ(1)=Z-Z1
      ZZ(2)=Z-Z2
      ZZ(3)=ZZ(1)
      ZZ(4)=ZZ(2)
      DO 1 J=1,4
      XJ=YY(J)*ZZ(J)/(XX*SQRT(XX*XX+YY(J)*YY(J)+ZZ(J)*ZZ(J)))
      PART=SIGN(J)*ATAN(XJ)
      SUM=SUM+PART
1 2 TFUNC=SUM
      RETURN
      END

```

```

TFUNC 001
TFUNC 002
TFUNC 003
TFUNC 004
TFUNC 005
TFUNC 006
TFUNC 007
TFUNC 008
TFUNC 009
TFUNC 010
TFUNC 011
TFUNC 012
TFUNC 013
TFUNC 014
TFUNC 015
TFUNC 016
TFUNC 017
TFUNC 018
TFUNC 019
TFUNC 020
TFUNC 021
TFUNC 022
TFUNC 023
TFUNC 024
TFUNC 025
TFUNC 026
TFUNC 027

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

SUBROUTINE TAPEIO(MATSAV,IU)
  MATSAV=1 : WRITE ALL REQUIRED MATRICES
  MATSAV=2 : READ ALL REQUIRED MATRICES
  MATSAV=3 : READ ONLY THE INFLUENCE COEFFICIENT MATRICES.

  COMMON/IMAT/ UGRF(25,25),UGWL(25,25),UGCL(25,25),UQCL(25,25),
  * UGRF(25,25),
  * UQCL(25,25),UQCL(25,25),UGWL(25,25),UGWL(25,25),
  * UGRF(25,25)
  COMMON/LMAT/ AG(25,25),AG(25,25)
  COMMON/ARR1/ XR(25),YR(25),ZR(25),XL(25),YL(25),ZL(25),
  * YV(25),YV(25),ZV(25),XS(25),XS(25),YS(25),ZS(25),
  * SBV(25),SBS(25),PSIV(25),ALFV(25),PSIS(25),ALFS(25),
  * CPOWL(25),UCPPF(25),UXORF(25),UXGWL(25),UXGWL(25),
  * ULIFT(25),UBLFG(25),GAMA(25),SIGNA(25)
  COMMON/IMAG/ B,H,LAYERS,IRF
  COMMON/SIZE/ NP,NV,NV,NS,XPVOR,XPSRC

  PI = 3.141592654
  RAD = PI/180.0

  IF(MATSAV .LE. 0) RETURN
  IF(MATSAV .EQ. 1) GO TO 30

  READ (IU,1000) LAYERS,IRF,NR,NV,NV,NS
  DC 10 I = 1,NR
  READ (IU,1000) XR(I),YR(I),ZR(I)
  YR(I) = YR(I)*B
  ZR(I) = ZR(I)*H
  10 CONTINUE
  DC 15 I = 1,NV
  READ (IU,1000) XL(I),YL(I),ZL(I)
  XL(I) = XL(I)*B
  YL(I) = YL(I)*B
  ZL(I) = ZL(I)*H
  15 CONTINUE
  DC 20 I = 1,NV
  READ (IU,1000) XV(I),YV(I),ZV(I),SBV(I),PSIV(I),ALFV(I)
  XV(I) = XV(I)*B
  YV(I) = YV(I)*B
  ZV(I) = ZV(I)*H
  SPV(I) = SBV(I)*B
  PSIV(I) = PSIV(I)*RAD
  ALFV(I) = ALFV(I)*RAD
  20 CONTINUE
  DC 25 I = 1,NS
  READ (IU,1000) XS(I),YS(I),ZS(I),SBS(I),PSIS(I),ALFS(I)
  XS(I) = XS(I)*B
  YS(I) = YS(I)*B
  ZS(I) = ZS(I)*H
  SBS(I) = SBS(I)*B
  PSIS(I) = PSIS(I)*RAD

```

TAPEIO 001
TAPEIO 002
TAPEIO 003
TAPEIO 004
TAPEIO 005
TAPEIO 006
TAPEIO 007
TAPEIO 008
TAPEIO 009
TAPEIO 010
TAPEIO 011
TAPEIO 012
TAPEIO 013
TAPEIO 014
TAPEIO 015
TAPEIO 016
TAPEIO 017
TAPEIO 018
TAPEIO 019
TAPEIO 020
TAPEIO 021
TAPEIO 022
TAPEIO 023
TAPEIO 024
TAPEIO 025
TAPEIO 026
TAPEIO 027
TAPEIO 028
TAPEIO 029
TAPEIO 030
TAPEIO 031
TAPEIO 032
TAPEIO 033
TAPEIO 034
TAPEIO 035
TAPEIO 036
TAPEIO 037
TAPEIO 038
TAPEIO 039
TAPEIO 040
TAPEIO 041
TAPEIO 042
TAPEIO 043
TAPEIO 044
TAPEIO 045
TAPEIO 046
TAPEIO 047
TAPEIO 048
TAPEIO 049
TAPEIO 050
TAPEIO 051
TAPEIO 052
TAPEIO 053
TAPEIO 054

ORIGINAL PAGE IS
OF POOR QUALITY

```

C 25 CONTINUE
      ALFS(I) = ALFS(I)*RAD
      READ (IU,1000) ((UGRF(I,J),I=1,NR),J=1,NV)
      READ (IU,1000) ((UGWL(I,J),I=1,NW),J=1,NV)
      READ (IU,1000) ((UGVL(I,J),I=1,NV),J=1,NV)
      READ (IU,1000) ((UQWL(I,J),I=1,NV),J=1,NS)
      READ (IU,1000) ((UGKF(I,J),I=1,NR),J=1,NS)
      READ (IU,1000) ((UQCL(I,J),I=1,NW),J=1,NS)
      READ (IU,1000) ((UQCL(I,J),I=1,NV),J=1,NS)
      READ (IU,1000) ((UGCL(I,J),I=1,NW),J=1,NV)
      READ (IU,1000) ((UGCL(I,J),I=1,NV),J=1,NV)
      IF(MATSAT.EQ.3) RETURN
      READ (IU,1000) ((AG(I,J),I=1,NV),J=1,NV)
      READ (IU,1000) ((AQ(I,J),I=1,NS),J=1,NS)
      RETURN
C 30 WRITE (IU,1000) LAYERS,IRF,NR,NV,NV,NS
      WRITE (IU,1000) B,H,XPVOR,XPSRC
      DO 40 I = 1,NR
        WRITE (IU,1000) XR(I)/B,YR(I)/B,ZR(I)/H
        CONTINUE
      DO 45 I = 1,NW
        WRITE (IU,1000) XL(I)/B,YL(I)/B,ZL(I)/H
        CONTINUE
      DO 50 I = 1,NV
        WRITE (IU,1000) XV(I)/B,YV(I)/B,ZV(I)/H,SBV(I)/B,
        * PSIV(I)/RAD,ALFV(I)/RAD
      * CCNTINUE
      DO 55 I = 1,NS
        WRITE (IU,1000) XS(I)/B,YS(I)/B,ZS(I)/H,SBS(I)/B,
        * PSIS(I)/RAD,ALFS(I)/RAD
      * CONTINUE
      WRITE (IU,1000) ((UGRF(I,J),I=1,NR),J=1,NV)
      WRITE (IU,1000) ((UGWL(I,J),I=1,NW),J=1,NV)
      WRITE (IU,1000) ((UGVL(I,J),I=1,NV),J=1,NV)
      WRITE (IU,1000) ((UQWL(I,J),I=1,NV),J=1,NS)
      WRITE (IU,1000) ((UGRF(I,J),I=1,NR),J=1,NS)
      WRITE (IU,1000) ((UQCL(I,J),I=1,NW),J=1,NS)
      WRITE (IU,1000) ((UQCL(I,J),I=1,NV),J=1,NS)
      WRITE (IU,1000) ((UGCL(I,J),I=1,NW),J=1,NV)
      WRITE (IU,1000) ((UGCL(I,J),I=1,NV),J=1,NV)
      WRITE (IU,1000) ((AG(I,J),I=1,NV),J=1,NV)
      WRITE (IU,1000) ((AQ(I,J),I=1,NS),J=1,NS)
      RETURN
C 1000 FORMAT (5E16.8)
  1100 FORMAT (16I5)
      END

```

TAPEIO 055
 TAPEIO 056
 TAPEIO 057
 TAPEIO 058
 TAPEIO 059
 TAPEIO 060
 TAPEIO 061
 TAPEIO 062
 TAPEIO 063
 TAPEIO 064
 TAPEIO 065
 TAPEIO 066
 TAPEIO 067
 TAPEIO 068
 TAPEIO 069
 TAPEIO 070
 TAPEIO 071
 TAPEIO 072
 TAPEIO 073
 TAPEIO 074
 TAPEIO 075
 TAPEIO 076
 TAPEIO 077
 TAPEIO 078
 TAPEIO 079
 TAPEIO 080
 TAPEIO 081
 TAPEIO 082
 TAPEIO 083
 TAPEIO 084
 TAPEIO 085
 TAPEIO 086
 TAPEIO 087
 TAPEIO 088
 TAPEIO 089
 TAPEIO 090
 TAPEIO 091
 TAPEIO 092
 TAPEIO 093
 TAPEIO 094
 TAPEIO 095
 TAPEIO 096
 TAPEIO 097
 TAPEIO 098
 TAPEIO 099
 TAPEIO 100
 TAPEIO 101
 TAPEIO 102
 TAPEIO 103
 TAPEIO 104

ORIGINAL FILE
OF POOR QUALITY

READCP 001
READCP 002
READCP 003
READCP 004
READCP 005
READCP 006
READCP 007
READCP 008
READCP 009
READCP 010
READCP 011
READCP 012
READCP 013
READCP 014
READCP 015
READCP 016
READCP 017
READCP 018
READCP 019
READCP 020
READCP 021
READCP 022
READCP 023
READCP 024
READCP 025
READCP 026
READCP 027
READCP 028
READCP 029
READCP 030
READCP 031
READCP 032
READCP 033
READCP 034
READCP 035
READCP 036
READCP 037
READCP 038
READCP 039
READCP 040
READCP 041
READCP 042
READCP 043
READCP 044
READCP 045
READCP 046
READCP 047
READCP 048
READCP 049
READCP 050
READCP 051
READCP 052
READCP 053
READCP 054

```

SUBROUTINE READCP(VCP,NO,IRUN,IP,IRAIL,JRAIL,LIFT,IRF)
COMMON /BLK8/ ALFU,POU,QOU,CMUU,CLU,CDU,CMU
DIMENSION VCP(NO), VCPA(30,8), XCP(25), XCP7(30)
DATA XCP7 / -35.0, -22.1, -18.3, -14.3, -10.2, -6.2, -2.2, 0.8,
1.8, 2.8, 3.8, 4.8, 6.8, 9.8, 10.8, 12.8, 15.8, 18.8,
21.8, 24.8, 30.8, 36.8, 42.8, 48.8, 54.8, 60.8, 4*0.8 /
1
DATA XCP / -35.0, -20.0, -16.0, -12.0, -8.0, -4.0, 0.0, 3.0, 6.0,
9.0, 12.0, 15.0, 18.0, 21.0, 25.26, 30.0, 36.0, 42.0,
48.0, 54.0, 60.0, 4*0.0 /
*

C---RETURNS CP-VALUES FROM FILE 'TAPE10'
C---PARAMETERS
VCP -- ARRAY OF VELOCITY VALUES FROM MEASURED CP_S
NOTE 1 AT PRESENT 'TAPE10' CONTAINS VELOCITY
NOTE 1 INSTEAD OF CP-S FOR KBF DATA.
NO -- NUMBER OF CP-VALUES
IP -- TUNNEL RUN ID NUMBER
IRAIL -- FIRST RAIL NUMBER FOR CP-VALUES
JRAIL -- SECOND RAIL NUMBER FOR CP-VALUES
LIFT -- 0 OR 1
IRF -- VCP = (VCP(JRAIL) + VCP(IRAIL))/2, FOR SIDEWALLS
1 -- VCP = (VCP(JRAIL) - VCP(IRAIL)), FOR (ROOF-FLOOR)
IRF -- OPTION FLAG. 0=ROOF ONLY, 1=(ROOF-FLOOR)

10 READ (10,500,END=99) NTEST,NRUN,NPNT
NMAX = NO
IF (IRAIL.EQ. 7) NMAX = 26
DO 20 J = 1,8
READ (10,510) (VCPA(I,J), I=1,NMAX)
READ (10,520) ALFU,POU,QOU,CMUU,CLU,CDU,CMU
IF (NRUN.NE. IRUN) GO TO 10
IF (NPNT.EQ. IP) GO TO 25
IF (NPNT.LT. IP) GO TO 10
IP = 0
GO TO 45

C 25 SIGN = 1.0
DENOM = 2.0
IF (LIFT.EQ. 0) GO TO 26
SIGN = -1.0*FLOAT(IRF)
DENOM = 1.0
IRL = IRL
IF (IRF.EQ. 0) GO TO 30
IF (IRAIL.NE. 7) GO TO 30
CALL INTER (XCP7,VCPA(1,7),XCP,VCPA(1,1),26,NO)
IRL = 1

C 30 DO 40 I = 1,NO
40 VCP(I) = (VCPA(1,JRAIL) + SIGN*VCPA(1,IRL))/DENOM
45 NN = (NO+8)/9
NN = NN*8 + 2
DO 50 I = 1,NN
50

```

ORIGINAL PAGE IS
OF POOR QUALITY.

READCP 055
READCP 056
READCP 057
READCP 058
READCP 059
READCP 060
READCP 061
READCP 062
READCP 063
READCP 064
READCP 065
READCP 066
READCP 067

```

50 BACKSPACE 10
   RETURN
C 99 WRITE (6,600) IRUN
   IRUN = -IRUN
   RETURN
C 500 FORMAT (16(S)
510 FORMAT (2X,9F8.4)
520 FORMAT (7F10.2)
600 FORMAT (///, --- EOF ON TAPE10 ---) ** NO DATA WITH IDRUN -',
1 13. ' '///)
   END

```

INTER 001
INTER 002
INTER 003
INTER 004
INTER 005
INTER 006
INTER 007
INTER 008
INTER 009
INTER 010
INTER 011
INTER 012
INTER 013
INTER 014
INTER 015
INTER 016
INTER 017
INTER 018
INTER 019
INTER 020
INTER 021
INTER 022
INTER 023
INTER 024
INTER 025

```

SUBROUTINE INTER(XD,FD,XI,FI,MAX,IDO)
  GIVEN A SET OF VALUES IN THE ARRAY "FD" AT DATA POINTS "XD".
  THIS SUBROUTINE INTERPOLATES THEM AT POINTS "XI".
  THE INTERPOLATED VALUES ARE PLACED IN ARRAY "FI".
  MAX : NO. OF POINTS IN "XD" FOR WHICH "FI" IS DEFINED
  IDO : NO. OF POINTS IN "XI" FOR WHICH "FI" IS DESIRED.
  DIMENSION XD(1),FD(1),XI(1),FI(1)
  DO 40 I = 1,IDO
    IF(XI(I).GT. XD(1)) GO TO 10
    J = 2
    GO TO 30
  10 DO 20 J = 1,MAX
    IF(XD(J).GE. XI(I)) GO TO 30
  20 CONTINUE
    J = MAX
    JP = J
    JM = J-1
    FI(I) = FD(JM) + (FD(JP) - FD(JM))*(XI(I)-XD(JM))/
      (XD(JP)-XD(JM))
  40 CONTINUE
    RETURN
  END

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

SUBROUTINE OUTPUT(NO,NS, XM,SPAN, LIFT, VCP,XCP,SIGMA,
    DC,DW, ICORR, JET)
C --- OUTPUT OF LIFT AND BLOCKAGE CORRECTIONS
C --- GENERATION OF LINE PRINTER PLOTS

COMMON/IMAG/ B,H,LAYERS,IRF
DIMENSION VCP(NO),XCP(NO),SIGMA(NS),DC(25,3),DW(25,3)
DIMENSION XM(NS),NP(61)

SPB = SPAN/B*2.0
C --- SET UP HEADERS AND PLOT LIMITS
L=2*LIFT*1
IF(LIFT.EQ.1) GO TO 1
VALU = B*H
WRITE(6,10)
GO TO 2
1 WRITE(6,11)
VALU = SQRT(B*H)
2 CALL RLIM(VCP,DW,DC(1,1),AA,BB,CC,DD,NO)

SUM = 0.0
CYCLE THROUGH RAIL DATA
DO 9 N=1,NO
X=XCP(N)/B
CALL PPLOT(VCP(N),NP,N,AA,1,ICORR)
WRITE(6,12) X,VCP(N),DW(N,3),J=1,3,DC(N,L),NP
CALL PPLOT(DW(N,1),NP,N,AA,2,ICORR)
WRITE(6,13) NP
CALL PPLOT(DC(N,L),NP,N,AA,3,ICORR)
IF(N.GT.NS) GO TO 3
X=XM(N)/B
Q = SIGMA(N)/(VALU)
SUM = SUM + Q
IF(JET.EQ.0) WRITE(6,13) NP,X,Q
GO TO 9
3 K = N-NS
IF(JET.NE.0) GO TO 9
IF(K.GE.7) GO TO 8
GO TO (4, 5, 4, 6, 8, 7), K
4 WRITE(6,14) NP
GO TO 9
5 WRITE(6,15) NP,SUM
GO TO 9
6 WRITE(6,16) NP,SPB
GO TO 9
7 IF(LIFT.NE.1) WRITE(6,17) NP
IF(LIFT.EQ.1) WRITE(6,18) NP
8 WRITE(6,13) NP
9 CONTINUE

C --- TERMINATION
WRITE(6,20) AA,BB,CC,DD
RETURN

```

OUTPUT 001
 OUTPUT 002
 OUTPUT 003
 OUTPUT 004
 OUTPUT 005
 OUTPUT 006
 OUTPUT 007
 OUTPUT 008
 OUTPUT 009
 OUTPUT 010
 OUTPUT 011
 OUTPUT 012
 OUTPUT 013
 OUTPUT 014
 OUTPUT 015
 OUTPUT 016
 OUTPUT 017
 OUTPUT 018
 OUTPUT 019
 OUTPUT 020
 OUTPUT 021
 OUTPUT 022
 OUTPUT 023
 OUTPUT 024
 OUTPUT 025
 OUTPUT 026
 OUTPUT 027
 OUTPUT 028
 OUTPUT 029
 OUTPUT 030
 OUTPUT 031
 OUTPUT 032
 OUTPUT 033
 OUTPUT 034
 OUTPUT 035
 OUTPUT 036
 OUTPUT 037
 OUTPUT 038
 OUTPUT 039
 OUTPUT 040
 OUTPUT 041
 OUTPUT 042
 OUTPUT 043
 OUTPUT 044
 OUTPUT 045
 OUTPUT 046
 OUTPUT 047
 OUTPUT 048
 OUTPUT 049
 OUTPUT 050
 OUTPUT 051
 OUTPUT 052
 OUTPUT 053
 OUTPUT 054

ORIGINAL PAGE IS
OF POOR QUALITY

OUTPUT 055
OUTPUT 056
OUTPUT 057
OUTPUT 058
OUTPUT 059
OUTPUT 060
OUTPUT 061
OUTPUT 062
OUTPUT 063
OUTPUT 064
OUTPUT 065
OUTPUT 066
OUTPUT 067
OUTPUT 068
OUTPUT 069
OUTPUT 070
OUTPUT 071
OUTPUT 072

RLIM 001
RLIM 002
RLIM 003
RLIM 004
RLIM 005
RLIM 006
RLIM 007
RLIM 008
RLIM 009
RLIM 010
RLIM 011
RLIM 012
RLIM 013
RLIM 014
RLIM 015
RLIM 016
RLIM 017
RLIM 018
RLIM 019
RLIM 020
RLIM 021
RLIM 022
RLIM 023
RLIM 024
RLIM 025
RLIM 026
RLIM 027
RLIM 028
RLIM 029

```

10  FORMAT(/6X,4HPOSN,3X,5HINPUT,3(4X,4HWALL),5X,3HC/L,23X,
    19HBLOCKAGE CORRECTION,23X,13HSINGULARITIES/
    7X,3HX/8,2(4X,4HDV/U),4X,4HDV/U,4X,7HOU/U 1,
    3(9(2H--),2H-),5X,3HX/B,3X,2HS,
    3(9(2H--),2H-),5X,3HC/L,25X,
11  FORMAT(/6X,4HPOSN,3X,5HINPUT,3(4X,4HWALL),5X,3HC/L,25X,
    15HLIFT CORRECTION,25X,13HSINGULARITIES/
    7X,3HX/8,2(4X,4HDV/U),4X,4HDV/U,4X,7HOU/U 1,
    3(9(2H--),2H-),5X,3HX/B,3X,2HG,
12  FORMAT(2X,6F8.4,2X,61A1)
13  FORMAT(1H+,51X,61A1, 2F8.4)
14  FORMAT(1H+,51X,61A1, 8X,8(1H-))
15  FORMAT(1H+,51X,61A1,2X,6HTOTAL=F8.4)
16  FORMAT(1H+,51X,61A1,1X,7HSPAN/B=F8.4)
17  FORMAT(1H+,51X,61A1,1X,12HS=S/(U*B*H))
18  FORMAT(1H+,51X,61A1,1X,18HG=S/(U*SORT(B*H))
20  FORMAT(15X,1HX,7X,1H+,23X,1HO,4X,1HI,3(9(2H--),2H-),34X,4F20.2)
28  END

```

SUBROUTINE RLIM(X1,X2,X3,A,B,C,D,N)

C --- DETERMINATION OF LINE PRINTER PLOT LIMITS

C DIMENSION X1(25),X2(25),X3(25),XN(4)

C DATA XN/1.,2.,4.,5./

```

C 11=1
C XX=-.01
C A=XX
C D=-2.*A
C DO 4 I=1,N
C IF((X1(I),LT.A).OR.(X1(I),GT.D)) GO TO 2
C IF((X2(I),LT.A).OR.(X2(I),GT.D)) GO TO 2
C IF((X3(I),LT.A).OR.(X3(I),GT.D)) GO TO 2
C GO TO 4

```

C 2 11=11+1

C IF((11,LT.5) GO TO 3

C 11=1

C XX=10.*XX

C A=XN(11)*XX

C D=-2.*A

C GO TO 1

C 4 CONTINUE

C B=0.

C C=-A

C RETURN

C END

ORIGINAL PAGE IS
OF POOR QUALITY

PLOT 001
PLOT 002
PLOT 003
PLOT 004
PLOT 005
PLOT 006
PLOT 007
PLOT 008
PLOT 009
PLOT 010
PLOT 011
PLOT 012
PLOT 013
PLOT 014
PLOT 015
PLOT 016
PLOT 017
PLOT 018
PLOT 019
PLOT 020
PLOT 021
PLOT 022
PLOT 023
PLOT 024
PLOT 025
PLOT 026
PLOT 027
PLOT 028
PLOT 029
PLOT 030
PLOT 031
PLOT 032
PLOT 033
PLOT 034
PLOT 035
PLOT 036
PLOT 037

```

SUBROUTINE PLOT(X,N,L,A,K,ICORR)
C --- GENERATION OF PLOT BACKGROUND
C
C   DIMENSION N(61),NS(3), NP(3)
C   DATA NB,NL,NL/1H,1H1,1H-/,
C   DATA NS/1HX,1H+,1HO/
C
C   IF(K.EQ.3) GO TO 1
C   IF(L.NE.1) GO TO 2
C   B=A/2H.
C   C=B/2.
C   NT = NB
C   GO TO 2
C
C   1 IF(L.EQ.ICORR) NT=NL
C   2 DO 3 I=1,61
C   3 N(I)=NT
C   NT=NB
C   IF(K.LT.3) GO TO 7
C
C   4 N(1)=NI
C   N(21)=NI
C   N(61)=NI
C
C   11 = NP(1)
C   N(11) = NB
C   12 = NP(2)
C   N(12) = NB
C
C   7 T=X-A+C
C   I=T/8+1
C   N(1)=NS(K)
C   NP(K) = I
C   RETURN
C   END

```

ORIGINAL PAGE 13
OF FOUR QUALITY

LNDBEQ 001
LNDBEQ 002
LNDBEQ 003
LNDBEQ 004
LNDBEQ 005
LNDBEQ 006
LNDBEQ 007
LNDBEQ 008
LNDBEQ 009
LNDBEQ 010
LNDBEQ 011
LNDBEQ 012
LNDBEQ 013
LNDBEQ 014
LNDBEQ 015
LNDBEQ 016
LNDBEQ 017
LNDBEQ 018
LNDBEQ 019
LNDBEQ 020
LNDBEQ 021
LNDBEQ 022
LNDBEQ 023
LNDBEQ 024
LNDBEQ 025
LNDBEQ 026
LNDBEQ 027
LNDBEQ 028
LNDBEQ 029
LNDBEQ 030
LNDBEQ 031
LNDBEQ 032
LNDBEQ 033
LNDBEQ 034
LNDBEQ 035
LNDBEQ 036
LNDBEQ 037
LNDBEQ 038
LNDBEQ 039
LNDBEQ 040
LNDBEQ 041
LNDBEQ 042
LNDBEQ 043
LNDBEQ 044
LNDBEQ 045
LNDBEQ 046
LNDBEQ 047
LNDBEQ 048
LNDBEQ 049
LNDBEQ 050
LNDBEQ 051
LNDBEQ 052
LNDBEQ 053
LNDBEQ 054

```

SUBROUTINE LNDBEQ(VMU2,XC,YC,ZC,VLI,DJ,DV,DW,IT)
  C-  LINL DOUBLET EQUATION
  PI=3.141592654
  C THE VALUE OF 'IT' TAKES THE VALUE OF '2' FOR TYPE 1,2) AND '3' FOR
  C TYPE 1,3)
  CONST=VMU2/(4.*PI)
  IF(IT=2)1,1,2
  2 TEMP=ZC
  ZC=YC
  YC=TEMP
  1 VLI2=VLI/2.
  XCPL=XC-VLI2
  XCML=XC-VLI2
  TNP=YC**2-ZC**2
  TPN=YC**2-ZC**2
  DNI=XCML**2+TMPP
  DPI=XCPL**2+TMPP
  TEMP=.1E-06
  IF(IT=2)1,1,2
  IF(IT=2)1,1,13
  11 TEMP=ABS(XC)-VLI2
  IF(TEMP)19,18,5
  18 DU=.0
  DV=.0
  DW=.0
  GO TO 3
  5 DNOMP=SORT(DPI**3)
  DNOMN=SORT(DNI**3)
  DU=CONST*YC*(1./DNOMN-1./DNOMP)
  DV=.5*CONST*(1./XCPL**2-1./XCML**2)
  DW=.0
  GO TO 3
  13 DNOMP=SORT(DPI**3)
  DNOMN=SORT(DNI**3)
  DU=CONST*YC*(1./DNOMN-1./DNOMP)
  DV=CONST*(XCPL*(TMPP*2)+DNOMP-XCML*(TMPP*2+DNOMN))
  DW=CONST*YC*(XCPL*(2.*DPI+TMPP)+DNOMP-XCML*(2.*DNI+TMPP)/DNOMN)
  1/TMPP**2
  IF(IT=2)3,3,4
  4 TEMP=DW
  DV=DV
  DW=TEMP
  3 CONTINUE
  RETURN
C 100 DNOMP = SORT(DPI**3)
  DNOMN = SORT(DNI**3)
  DU = CONST*(XCML/DNOMN - XCPL/DNOMP)
  DV = CONST*YC*(1./DNOMN - 1./DNOMP)
  DW = CONST*YC*(1./DNOMN - 1./DNOMP)
  RETURN
C
END

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

SUBROUTINE LND8GN(XA,YA,ZA,XB,YB,ZB,VMU,CX,CY,CZ,XP,YP,ZP,DU,DV,DW
1,VMUR,CX*,CY*,CZR)
C- GENERATES DU,DV,DW VELOCITIES DUE TO A LINE DOUBLET
C- DATA TO BE SUPPLIED.*****
C-----
C  XA,YA,ZA,XB,YB,ZB ARE THE END COORDINATES OF THE LINE DOUBLET.
C  VMU IS THE COUPLE OF THE DOUBLET.
C  CX,CY,CZ ARE THE DIRECTION COSINES OF THE COUPLE VECTOR.
C  CX=X/R  CY=Y/R  AND  CZ=Z/R.  R=SQRT(X**2+Y**2+Z**2)
C  VL IS THE LENGTH OF THE LINE DOUBLET.
C  XP,YP,ZP ARE THE COORDINATES OF ANY POINT IN SPACE.
C  VALUES CALCULATED BY THE PROGRAM*****
C-----
C  DU,DV,DW ARE THE VELOCITY COMPONENTS AT THE POINT 'P' IN THE (X,Y,Z)
C  SYSTEM
C  VMUR IS THE RESULTANT COMPONENT OF THE COUPLE OF THE DOUBLET.
C  THIS COMPONENT IS NORMAL TO THE AXIS OF THE DOUBLET.
C  CXR,CYR,CZR ARE THE DIRECTION COSINES OF THE COUPLE VECTOR USED IN
C  CALCULATING DU,DV,DW.
C  NOTE: THE COMPONENT OF THE COUPLE VECTOR ALONG THE AXIS OF THE
C  DOUBLET WAS NOT INCLUDED IN DETERMINING DU,DV,DW. THIS ELIMINATED
C  POINT SOURCE AND POINT SINK EFFECTS IN THE MODEL DUE TO THE LINE
C  DOUBLET.*****
C*****
      TEMP=(XA+XB)/2.
      XAO=XA-TEMP
      XBO=XB-TEMP
      XPO=XP-TEMP
      TEMP=(YA+YB)/2.
      YAO=YA-TEMP
      YBO=YB-TEMP
      YPO=YP-TEMP
      TEMP=(ZA+ZB)/2.
      ZAO=ZA-TEMP
      ZBO=ZB-TEMP
      ZPO=ZP-TEMP
      IC=1
      CALL CRDTEG(XAO,YAO,ZAO,XBO,YBO,ZBO,XPO,YPO,ZPO,XPCG,YPCG,ZPCG,IC)
      CALL CRDTEG(XAO,YAO,ZAO,XBO,YBO,ZBO,CX,CY,CZ,CXG,CYG,CZG,IC)
      VMU2=VMU*CYG
      VMU3=VMU*CZG
      VMUR=SQRT(VMU2**2+VMU3**2)
      VL1=SQRT((XA-XB)**2+(YA-YB)**2+(ZA-ZB)**2)
      IT=2
      CALL LND8EQ(VMU2,XPCG,YPCG,ZPCG,VL1,DU2,DV2,DW2,IT)
      IT=3
      CALL LND8EQ(VMU3,XPCG,YPCG,ZPCG,VL1,DU3,DV3,DW3,IT)
      DUG=DU2+DU3
      DVG=DV2+DV3
      DWG=DW2+DW3
      CXG=0.
      TEMP=SQRT(CYG*CYG+CZG*CZG)

```

LND8GN 001
LND8GN 002
LND8GN 003
LND8GN 004
LND8GN 005
LND8GN 006
LND8GN 007
LND8GN 008
LND8GN 009
LND8GN 010
LND8GN 011
LND8GN 012
LND8GN 013
LND8GN 014
LND8GN 015
LND8GN 016
LND8GN 017
LND8GN 018
LND8GN 019
LND8GN 020
LND8GN 021
LND8GN 022
LND8GN 023
LND8GN 024
LND8GN 025
LND8GN 026
LND8GN 027
LND8GN 028
LND8GN 029
LND8GN 030
LND8GN 031
LND8GN 032
LND8GN 033
LND8GN 034
LND8GN 035
LND8GN 036
LND8GN 037
LND8GN 038
LND8GN 039
LND8GN 040
LND8GN 041
LND8GN 042
LND8GN 043
LND8GN 044
LND8GN 045
LND8GN 046
LND8GN 047
LND8GN 048
LND8GN 049
LND8GN 050
LND8GN 051
LND8GN 052
LND8GN 053
LND8GN 054

ORIGINAL FILED
OF POOR QUALITY

LNDEGN 055
LNDEGN 056
LNDEGN 057
LNDEGN 058
LNDEGN 059
LNDEGN 060
LNDEGN 061
LNDEGN 062

CYG=CYG/TEMP
CZG=CZG/TEMP
IC=2
CALL CRDTEG(XAO,YAO,ZAO,XBO,YBO,ZBO,DU,DV,DWG,IC)
CALL CRDTEG(XAO,YAO,ZAO,XBO,YBO,ZBO,CXR,CYR,CXG,CYG,CZG,IC)
CONTINUE
RETURN
END

LNXXGN 001
LNXXGN 002
LNXXGN 003
LNXXGN 004
LNXXGN 005
LNXXGN 006
LNXXGN 007
LNXXGN 008
LNXXGN 009
LNXXGN 010
LNXXGN 011
LNXXGN 012
LNXXGN 013
LNXXGN 014
LNXXGN 015
LNXXGN 016
LNXXGN 017
LNXXGN 018
LNXXGN 019
LNXXGN 020
LNXXGN 021
LNXXGN 022
LNXXGN 023

SUBROUTINE LNXXGN(XA,YA,ZA,XB,YB,ZB,CIRC,XP,YP,ZP,DU,DV,DWG)
C GENERATES INCREMENTAL VELOCITY DUE TO A LINE VORTEX.
TEMP=(XA*XB)/2.
XAO=XA-TEMP
XBO=XB-TEMP
XPO=XP-TEMP
TEMP=(YA*YB)/2.
YAO=YA-TEMP
YBO=YB-TEMP
YPO=YP-TEMP
TEMP=(ZA*ZB)/2.
ZAO=ZA-TEMP
ZBO=ZB-TEMP
ZPO=ZP-TEMP
IC=1
CALL CRDTEG(XAO,YAO,ZAO,XBO,YBO,ZBO,XPO,YPO,ZPO,XPCG,YPCG,ZPCG,IC)
VL1=SQR1((XA-XB)**2+(YA-YB)**2+(ZA-ZB)**2)
CALL LNXXEQ(CIRC,XPCG,YPCG,ZPCG,VL1,DWG,DWG)
IC=2
CALL CRDTEG(XAO,YAO,ZAO,XBO,YBO,ZBO,DU,DV,DWG,DWG,IC)
CONTINUE
RETURN
END

ORIGINAL COPIES
OF POOR QUALITY

LNVEQ 001
LNVEQ 002
LNVEQ 003
LNVEQ 004
LNVEQ 005
LNVEQ 006
LNVEQ 007
LNVEQ 008
LNVEQ 009
LNVEQ 010
LNVEQ 011
LNVEQ 012
LNVEQ 013
LNVEQ 014
LNVEQ 015
LNVEQ 016
LNVEQ 017
LNVEQ 018
LNVEQ 019
LNVEQ 020
LNVEQ 021
LNVEQ 022
LNVEQ 023
LNVEQ 024
LNVEQ 025
LNVEQ 026
LNVEQ 027
LNVEQ 028
LNVEQ 029
LNVEQ 030
LNVEQ 031

C- LINE VORTEX EQUATION
PI=3.141592654
SUBROUTINE LNVEQ(CIRC,XPG,Y,G,ZPG,VL,DUG,DVG,DWG)
DUG=0.
YZ2=YPG*YPG+ZPG*ZPG
VL2=VL/2
XPL2=XPG+VL2
XML2=XPG-VL2
DN=XML2**2+YZ2
DP=XPL2**2+YZ2
RDN=SQRT(DN)
RDP=SQRT(DP)
CONST=.25*CIRC/PI
TEMP=.01*VL
TEMP=.000001
IF(YZ2-TEMP)2,2,4
2 TEMP=ABS(XPG)-VL2
3 IF(TEMP)8,8,5
8 DVG=0.
DVG=0.
GO TO 7
5 TEMP=.5*CONST*(1./XML2**2-1./XPL2**2)
DVG=-ZPG*TEMP
DVG=YPG*TEMP
GO TO 7
4 TEMP=CONST*(XML2/RDN-XPL2/RDP)/YZ2
DVG=ZPG*TEMP
DVG=-YPG*TEMP
7 CONTINUE
RETURN
END

ORIGINAL PAGE IS
OF POOR QUALITY.

LMSCGN 001
LMSCGN 002
LMSCGN 003
LMSCGN 004
LMSCGN 005
LMSCGN 006
LMSCGN 007
LMSCGN 008
LMSCGN 009
LMSCGN 010
LMSCGN 011
LMSCGN 012
LMSCGN 013
LMSCGN 014
LMSCGN 015
LMSCGN 016
LMSCGN 017
LMSCGN 018
LMSCGN 019
LMSCGN 020
LMSCGN 021
LMSCGN 022
LMSCGN 023

```

SUBROUTINE LMSCGN(XA,YA,ZA,XB,YB,ZB,VM,XF,YF,ZF,DU,DV,DWG)
C-- GEN-RATES INCREMENTAL VELOCITIES DUE TO LINE SOURCE
TEMP=(XA+XB)/2.
AO=XA-TEMP
BO=XB-TEMP
PO=XP-TEMP
TEMP=(YA+YB)/2.
AO=YA-TEMP
BO=YB-TEMP
PO=YP-TEMP
TEMP=(ZA+ZB)/2.
AO=ZA-TEMP
BO=ZB-TEMP
ZPO=ZP-TEMP
IC=1
CALL CRDTEG(AO,YAO,ZAO,XBO,YBO,ZBO,XPO,YPO,ZPO,XPCG,YPCG,ZPCG,IC)
VL1=SQRT((XA-XB)**2+(YA-YB)**2+(ZA-ZB)**2)
CALL LMSCGD(VM,XPCG,YPCG,ZPCG,VL1,DUG,DVG,DWG)
IC=2
CALL CRDTEG(AO,YAO,ZAO,XBO,YBO,ZBO,XPO,YPO,ZPO,XPCG,YPCG,ZPCG,IC)
CONTINUE
RETURN
END

```

ORIGINAL PAGE IS
OF POOR QUALITY

```

SUBROUTINE LNSCEQ(VM,XPG,YPG,ZPG,VL,DUG,DVG,DWG)
C- LINE SOURCE EQUATION
PI=3.141592654
VZ2=YPG*YPG+ZPG*ZPG
VL2=VL/2.
XPL2=XPG*VL2
XML2=XPG*VL2
DN=XML2**2+YZ2
DP=XPL2**2+YZ2
RDN=SQRT(DN)
RDP=SQRT(DP)
CONST=.25*VM/PI
TEMP=.01*VL
IF (YZ2-TEMP)2.2,4
TEMP=ABS(XPG)-VL2
IF (TEMP)8.8,5
DUG=0.
DVG=0.
DWG=0.
GO TO 7
DUG=CONST*(1./RDN-1./RDP)
TEMP=.5*CONST*(1./XML2**2-1./XPL2**2)
DVG=YPG*TEMP
DWG=ZPG*TEMP
GO TO 7
DUG=CONST*(1./RDN-1./RDP)
TEMP=CONST*(XML2/RDN-XPL2/RDP)/YZ2
DVG=-YPG*TEMP
DWG=-ZPG*TEMP
7 CONTINUE
RETURN
END

```

LNSCEQ 001
LNSCEQ 002
LNSCEQ 003
LNSCEQ 004
LNSCEQ 005
LNSCEQ 006
LNSCEQ 007
LNSCEQ 008
LNSCEQ 009
LNSCEQ 010
LNSCEQ 011
LNSCEQ 012
LNSCEQ 013
LNSCEQ 014
LNSCEQ 015
LNSCEQ 016
LNSCEQ 017
LNSCEQ 018
LNSCEQ 019
LNSCEQ 020
LNSCEQ 021
LNSCEQ 022
LNSCEQ 023
LNSCEQ 024
LNSCEQ 025
LNSCEQ 026
LNSCEQ 027
LNSCEQ 028
LNSCEQ 029
LNSCEQ 030
LNSCEQ 031
LNSCEQ 032

ORIGINAL PAGE IS
OF POOR QUALITY

```

SUBROUTINE CRDTEG(XAO,YAO,ZAO,XBO,YBO,ZBO,XPO,YPO,ZPO,EXIP,ETAP,ZT
IAP,IC)
C COORDINATE TRANSFORMATION 'ENGLISH TO GREEK'.IC=1
C COORDINATE TRANSFORMATION 'GREEK TO ENGLISH'.IC=2
C THE ORIGIN OF THE COORDINATE SYSTEM WILL BE AT THE MID-POINT OF A-B.
C SUBROUTINE TRANSFORMS (X,Y,Z) SET OF AXES TO (EXI,ETA,ZTA)AXES WITH
C THE 'EXI' AXIS PARALLEL TO THE CENTRE LINE OF THE DOUBLET.
C THE ENDS OF THE LINE DOUBLET ARE 'A' AND 'B'.
C 'P' IS A GENERAL POINT IN SPACE.
C NOTE SYSTEM SET UP FOR POSITIVE WINDING NUMBERS FOR ROTATION OF AXES
C EPSI AND ALFA ARE THE ANGLES OF ROTATION OF THE ETA OR (Y) AND ZTA OR
C (Z) AXES RESPECTIVELY.
TEMP=SQRT((XAO-XBO)**2+(YAO-YBO)**2)
IF(TEMP).4,5
5 CEPST=(XAO-XBO)/TEMP
SEPSI=(YAO-YBO)/TEMP
XAP=XAO*CEPSI+YAO*SEPSI
XBP=XBO*CEPSI+YBO*SEPSI
GO TO 6
4 CEPST=1.
SEPSI=0.
XAP=XAO
XBP=XBO
6 TEMP=SQRT((XAP-XBP)**2+(ZAO-ZBO)**2)
IF(TEMP).7,8
8 SALFA=(ZBO-ZAO)/TEMP
CALFA=(XAP-XBP)/TEMP
GO TO 9
7 CALFA=1.
SALFA=0.
9 IF(IC-1).1,1,2
1 XPP=XPO*CEPSI+YPO*SEPSI
YPP=YPO*CEPSI-XPO*SEPSI
ZPP=ZPO
EXIP=XPP*CALFA-ZPP*SALFA
ETAP=YPP
ZTAP=XPP*SALFA+ZPP*CALFA
GO TO 3
2 XPP=EXIP*CALFA+ZTAP*SALFA
YPP=ETAP
ZPP=ZTAP*CALFA-EXIP*SALFA
XPO=XPP*CEPSI-YPP*SEPSI
YPO=XPP*SEPSI+YPP*CEPSI
ZPO=ZPP
3 CONTINUE
RETURN
END
CRDTEG 001
CRDTEG 002
CRDTEG 003
CRDTEG 004
CRDTEG 005
CRDTEG 006
CRDTEG 007
CRDTEG 008
CRDTEG 009
CRDTEG 010
CRDTEG 011
CRDTEG 012
CRDTEG 013
CRDTEG 014
CRDTEG 015
CRDTEG 016
CRDTEG 017
CRDTEG 018
CRDTEG 019
CRDTEG 020
CRDTEG 021
CRDTEG 022
CRDTEG 023
CRDTEG 024
CRDTEG 025
CRDTEG 026
CRDTEG 027
CRDTEG 028
CRDTEG 029
CRDTEG 030
CRDTEG 031
CRDTEG 032
CRDTEG 033
CRDTEG 034
CRDTEG 035
CRDTEG 036
CRDTEG 037
CRDTEG 038
CRDTEG 039
CRDTEG 040
CRDTEG 041
CRDTEG 042
CRDTEG 043
CRDTEG 044
CRDTEG 045
CRDTEG 046
CRDTEG 047

```

```
C C C SUBROUTINE GJRV (A,N,NL,EPSIL,IERR)
C . . . . .
C . MATRIX INVERSION ROUTINE
C .
C . CALLING SEQUENCE.....
C . CALL N,NL,EPSIL,IERR)
C . A IS THE INPUT ARRAY WHICH WILL BE DESTROYED, N IS THE RANK
C . OF A, NL IS THE ROW DIMENSION OF A, EPSIL IS THE TEST
C . VALUE FOR THE PIVOT POINT SINGULARITY CHECK ,
C . IERR IS NONZERO IF THE MATRIX IS SINGULAR
C . IF THE MATRIX IS NONSINGULAR, A CONTAINS A-INVERSE
C .
C . DIMENSION A(I),B(96),C(96),IP(96),IQ(96)
IERR=0
DO 168 K=1,N
PIVOT=B.
GET LARGEST ELEMENT IN MATRIX PLACE IN PIVOT
DO 38 J=K,N
DO 28 J=K,N
IDEX=(J-1)*NL+1
IF (ABS(A(IDEX))-ABS(PIVOT)) 28,28,18
18 CONTINUE
PIVOT=A(IDEX)
IP(K)=I
IQ(K)=J
IO(K)=J
28 CONTINUE
38 CONTINUE
IF (ABS(PIVOT)-EPSIL) 238,238,48
48 CONTINUE
IF (IP(K)-K) 58,78,58
58 CONTINUE
SWAP ROWS
DO 68 J=1,N
IPX=IP(K)
IDEX=(J-1)*NL+IPX
KDEX=(J-1)*NL+K
Z=A(IDEX)
A(IDEX)=A(KDEX)
A(KDEX)=Z
68 CONTINUE
78 CONTINUE
IF (IQ(K)-K) 88,108,88
88 CONTINUE
SWAP COLUMNS
DO 98 I=1,N
IPX=IQ(K)
```

ORIGINAL IS
OF POOR QUALITY

```

INDEX=(IPX-1)*NL+I
KDEX=(K-1)*NL+I
Z=A(IDEX)
A(IDEX)=A(KDEX)
A(KDEX)=Z
98 CONTINUE
108 CONTINUE
DO 148 J=1,N
KDEX=(J-1)*NL+K
JDEX=(K-1)*NL+J
IF (J-K) 128,118,128
118 CONTINUE
B(J)=1./PIVOT
C(J)=1.
GO TO 138
128 CONTINUE
B(J)=A(KDEX)/PIVOT
C(J)=A(JDEX)
138 CONTINUE
A(KDEX)=B.
A(JDEX)=B.
148 CONTINUE
DO 158 I=1,N
DO 158 J=1,N
INDEX=(J-1)*NL+I
IDEX=(J-1)*NL+I
A(IDEX)=A(IDEX)+C(I)*B(J)
158 CONTINUE
168 CONTINUE
DO 228 KP=1,N
K=M+1-KP
IF (IP(K)-K) 178,198,178
178 CONTINUE
DO 188 I=1,N
IPX=IP(K)
IDEX=(IPX-1)*NL+I
KDEX=(K-1)*NL+I
Z=A(IDEX)
A(IDEX)=A(KDEX)
A(KDEX)=Z
188 CONTINUE
198 CONTINUE
IF (IO(K)-K) 208,228,208
208 CONTINUE
DO 218 J=1,N
IPX=IO(K)
IDEX=(J-1)*NL+IPX
KDEX=(J-1)*NL+K
Z=A(IDEX)
A(IDEX)=A(KDEX)
A(KDEX)=Z
218 CONTINUE
228 CONTINUE
GO TO 248
238 CONTINUE
IERP=-1

```

GJRV 055
 GJRV 056
 GJRV 057
 GJRV 058
 GJRV 059
 GJRV 060
 GJRV 061
 GJRV 062
 GJRV 063
 GJRV 064
 GJRV 065
 GJRV 066
 GJRV 067
 GJRV 068
 GJRV 069
 GJRV 070
 GJRV 071
 GJRV 072
 GJRV 073
 GJRV 074
 GJRV 075
 GJRV 076
 GJRV 077
 GJRV 078
 GJRV 079
 GJRV 080
 GJRV 081
 GJRV 082
 GJRV 083
 GJRV 084
 GJRV 085
 GJRV 086
 GJRV 087
 GJRV 088
 GJRV 089
 GJRV 090
 GJRV 091
 GJRV 092
 GJRV 093
 GJRV 094
 GJRV 095
 GJRV 096
 GJRV 097
 GJRV 098
 GJRV 099
 GJRV 100
 GJRV 101
 GJRV 102
 GJRV 103
 GJRV 104
 GJRV 105
 GJRV 106
 GJRV 107
 GJRV 108
 GJRV 109

ORIGINAL 13
OF POOR 117

118
111
112

GURV
GURV
GURV

248 CONTINUE
RETURN
END

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 001 | OUT | 001 | OUT | 002 | OUT | 003 | OUT | 004 | OUT | 005 | OUT | 006 | OUT | 007 | OUT | 008 | OUT | 009 | OUT | 010 | OUT | 011 | OUT | 012 | OUT | 013 | OUT | 014 | OUT | 015 | OUT | 016 | OUT | 017 | OUT | 018 | OUT | 019 | OUT | 020 | OUT | 021 | OUT | 022 | OUT | 023 | OUT | 024 | OUT | 025 | OUT | 026 | OUT | 027 | OUT | 028 | OUT | 029 | OUT | 030 | OUT | 031 | OUT | 032 | OUT | 033 | OUT | 034 | OUT | 035 | OUT | 036 | OUT | 037 | OUT | 038 | OUT | 039 | OUT | 040 | OUT | 041 | OUT | 042 | OUT | 043 | OUT | 044 | OUT | 045 | OUT | 046 | OUT | 047 | OUT | 048 | OUT | 049 | OUT | 050 | OUT | 051 | OUT |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

149

ORIGINAL PAGE IS
OF POOR QUALITY

JETADD 001
JETADD 002
JETADD 003
JETADD 004
JETADD 005
JETADD 006
JETADD 007
JETADD 008
JETADD 009
JETADD 010
JETADD 011
JETADD 012
JETADD 013
JETADD 014
JETADD 015
JETADD 016
JETADD 017
JETADD 018
JETADD 019
JETADD 020
JETADD 021
JETADD 022
JETADD 023
JETADD 024
JETADD 025
JETADD 026
JETADD 027
JETADD 028
JETADD 029
JETADD 030
JETADD 031
JETADD 032
JETADD 033
JETADD 034
JETADD 035
JETADD 036
JETADD 037
JETADD 038

```

SUBROUTINE JETADD(NW,NR, VWall,VROOF,VCNTR, ITEST,IRUN,IP)
C- Subroutine to add the effects of jet/s.
C-
C- DIMENSION VCL(3), VWall(25,3),VROOF(25,3),VCNTR(25,3)
NN = MAX(NW,NR)
IREV = 0

C 10 READ (11,1000,END=50) IY,IR,IPT
IF(IT.NE.ITEST.OR. (R.NE.IRUN .OR. IPT.NE.IP) GO TO 40
DO 30 I = 1,NN
READ (11,1100) J,X0B,UVL,URF, (VCL(K),K=1,3)
VWall(I,1) = VWall(I,1) + UVL
VROOF(I,1) = VROOF(I,1) + URF
DO 20 K = 1,3
20 VCNTR(I,K) = VCNTR(I,K) + VCL(K)
30 CONTINUE
C RETURN
C
C 40 DO 45 I = 1,NN
45 READ (11,1100)
GO TO 10
C
C 50 IF(IREV.NE.0) GO TO 50
IREV = 1
REWIND 11
GO TO 10
C
C 60 WRITE (6,600) ITEST,IRUN,IP
RETURN
C
6000 FORMAT (//' *** NO JET EFFECT DATA FOUND IN TAPE11 FOR '
, ITEST/IRUN/IPT = ',3(13,1H/), ' ***'//)
10000 FORMAT (16I5)
11000 FORMAT (15,7E15.8)
C
END

```

APPENDIX 3


Examples of Signature Analysis

CONFIGURATION: STRAIGHT-WINGED KBF MODEL, NO TIPS.

FLAP BLOWING: $C_{\mu} = 2.0$


ANGLES-OF-ATTACK: $6^{\circ}, 12^{\circ}, 18^{\circ}, 24^{\circ}$

PLOTTED AFTER THIRD (I.E. FINAL) ITERATION

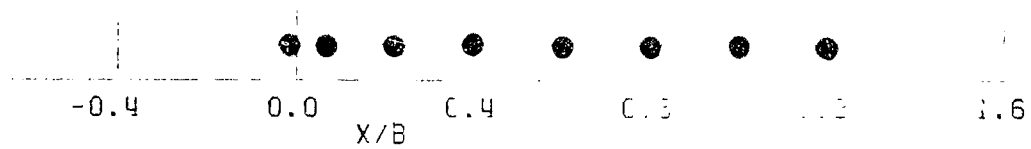


TEST 62, RUN 45, POINT 5

$\alpha = 6^\circ$

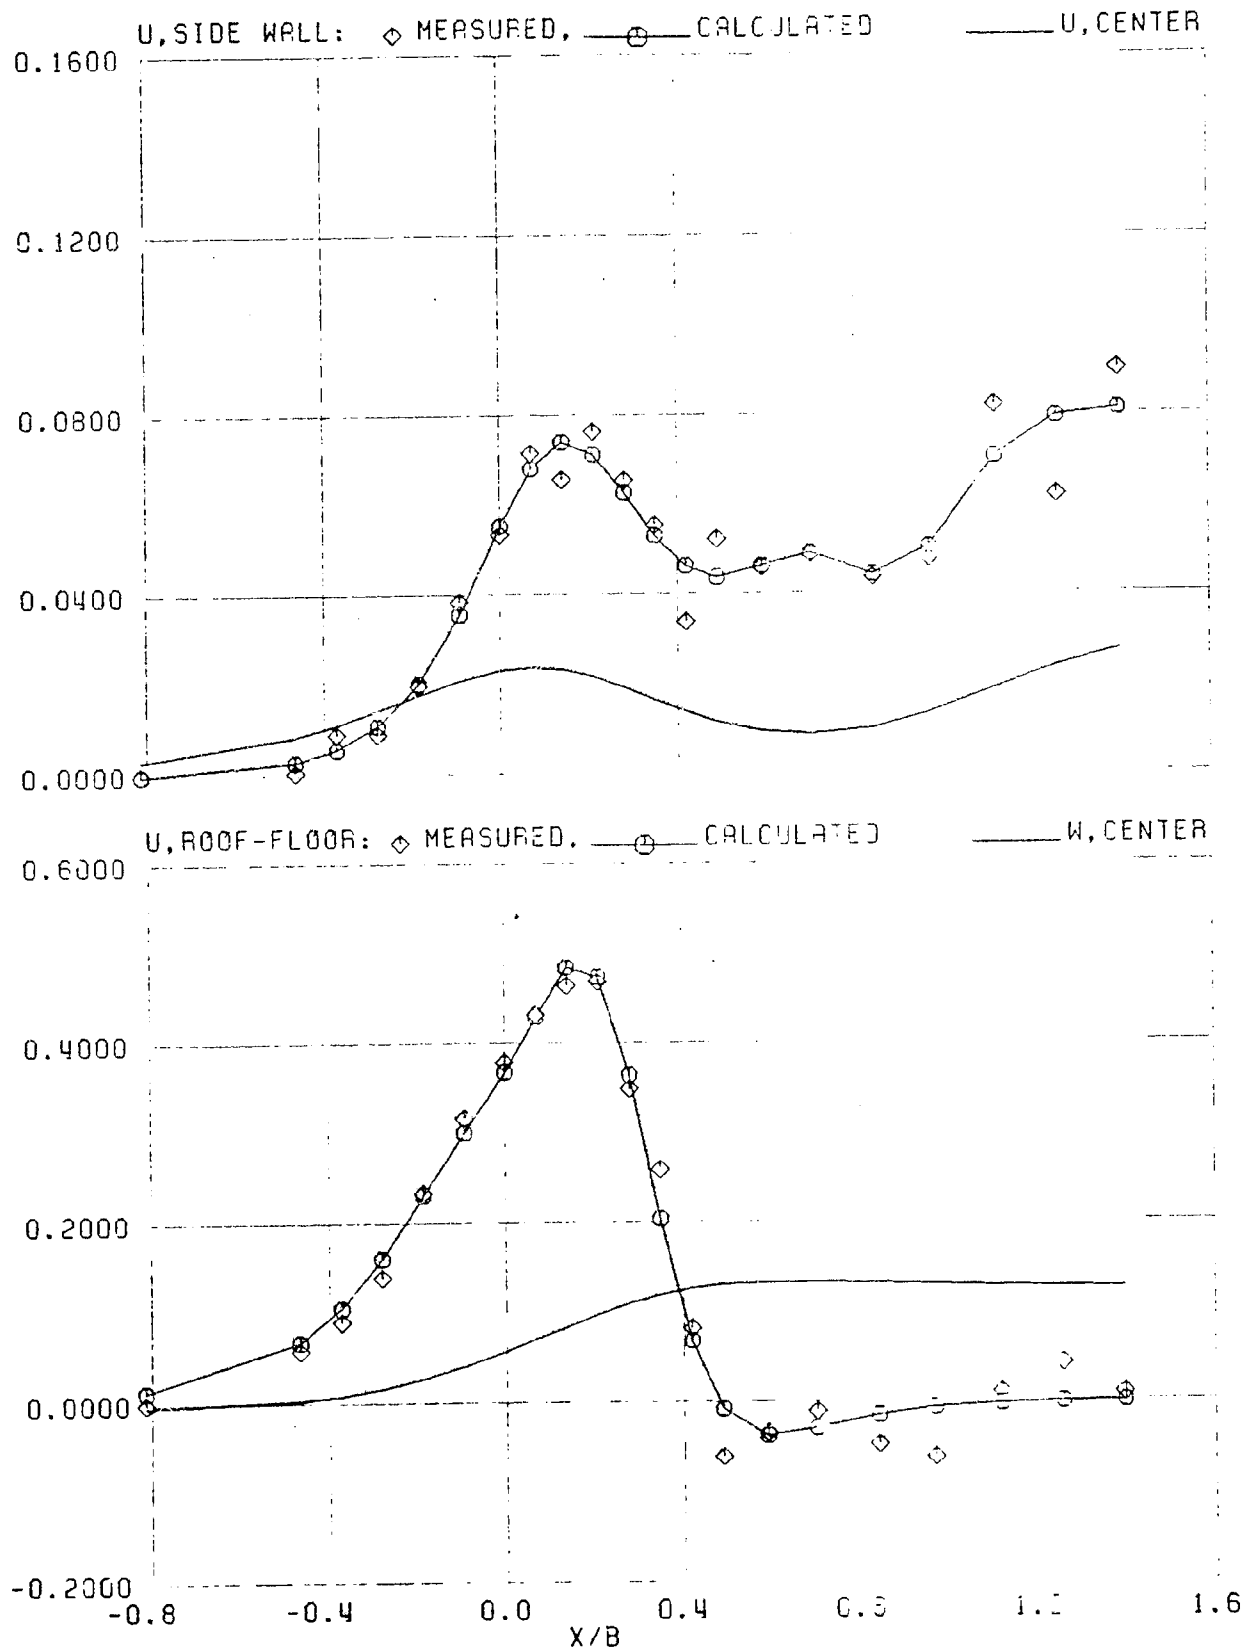


ORIGINAL PAGE IS
OF POOR QUALITY


TEST 62, RUN 45, POINT 18 $\alpha = 12^\circ$

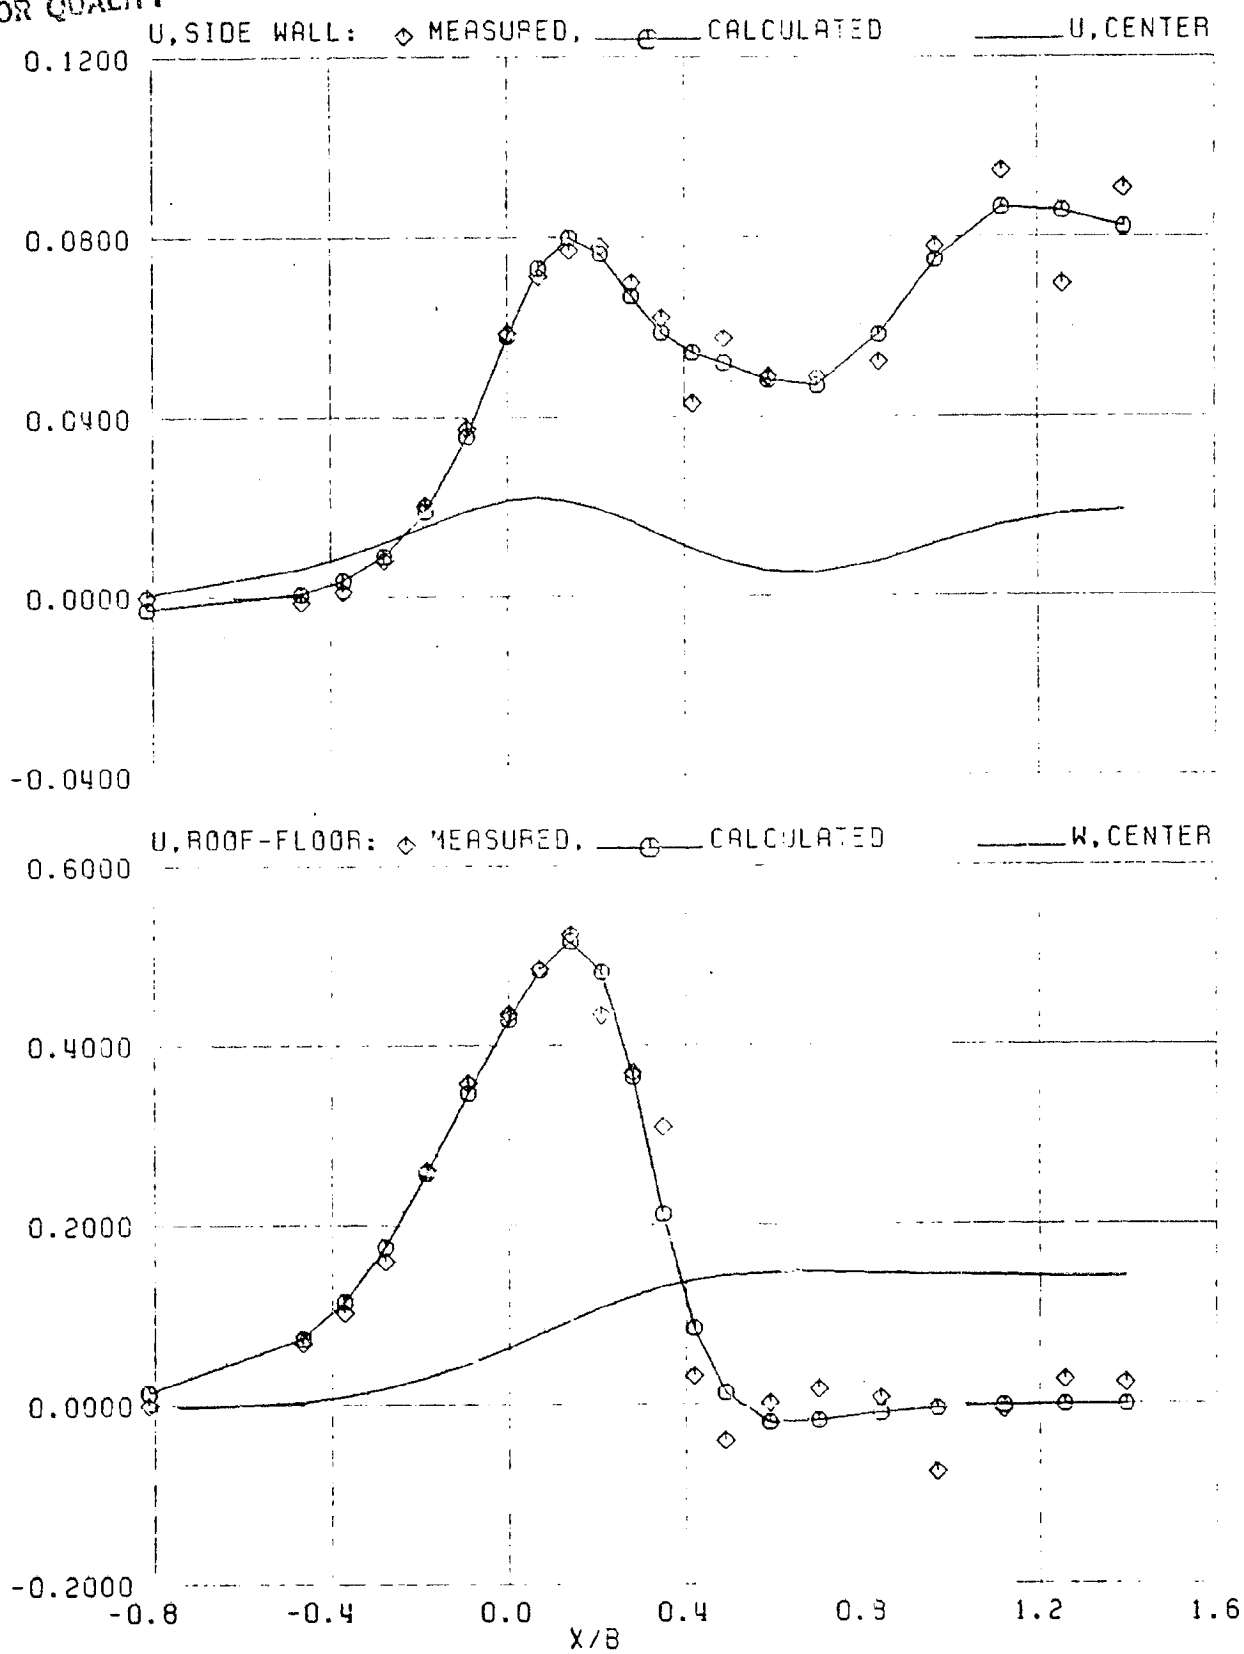

TEST 62, RUN 45, POINT 21

$\alpha = 18^\circ$

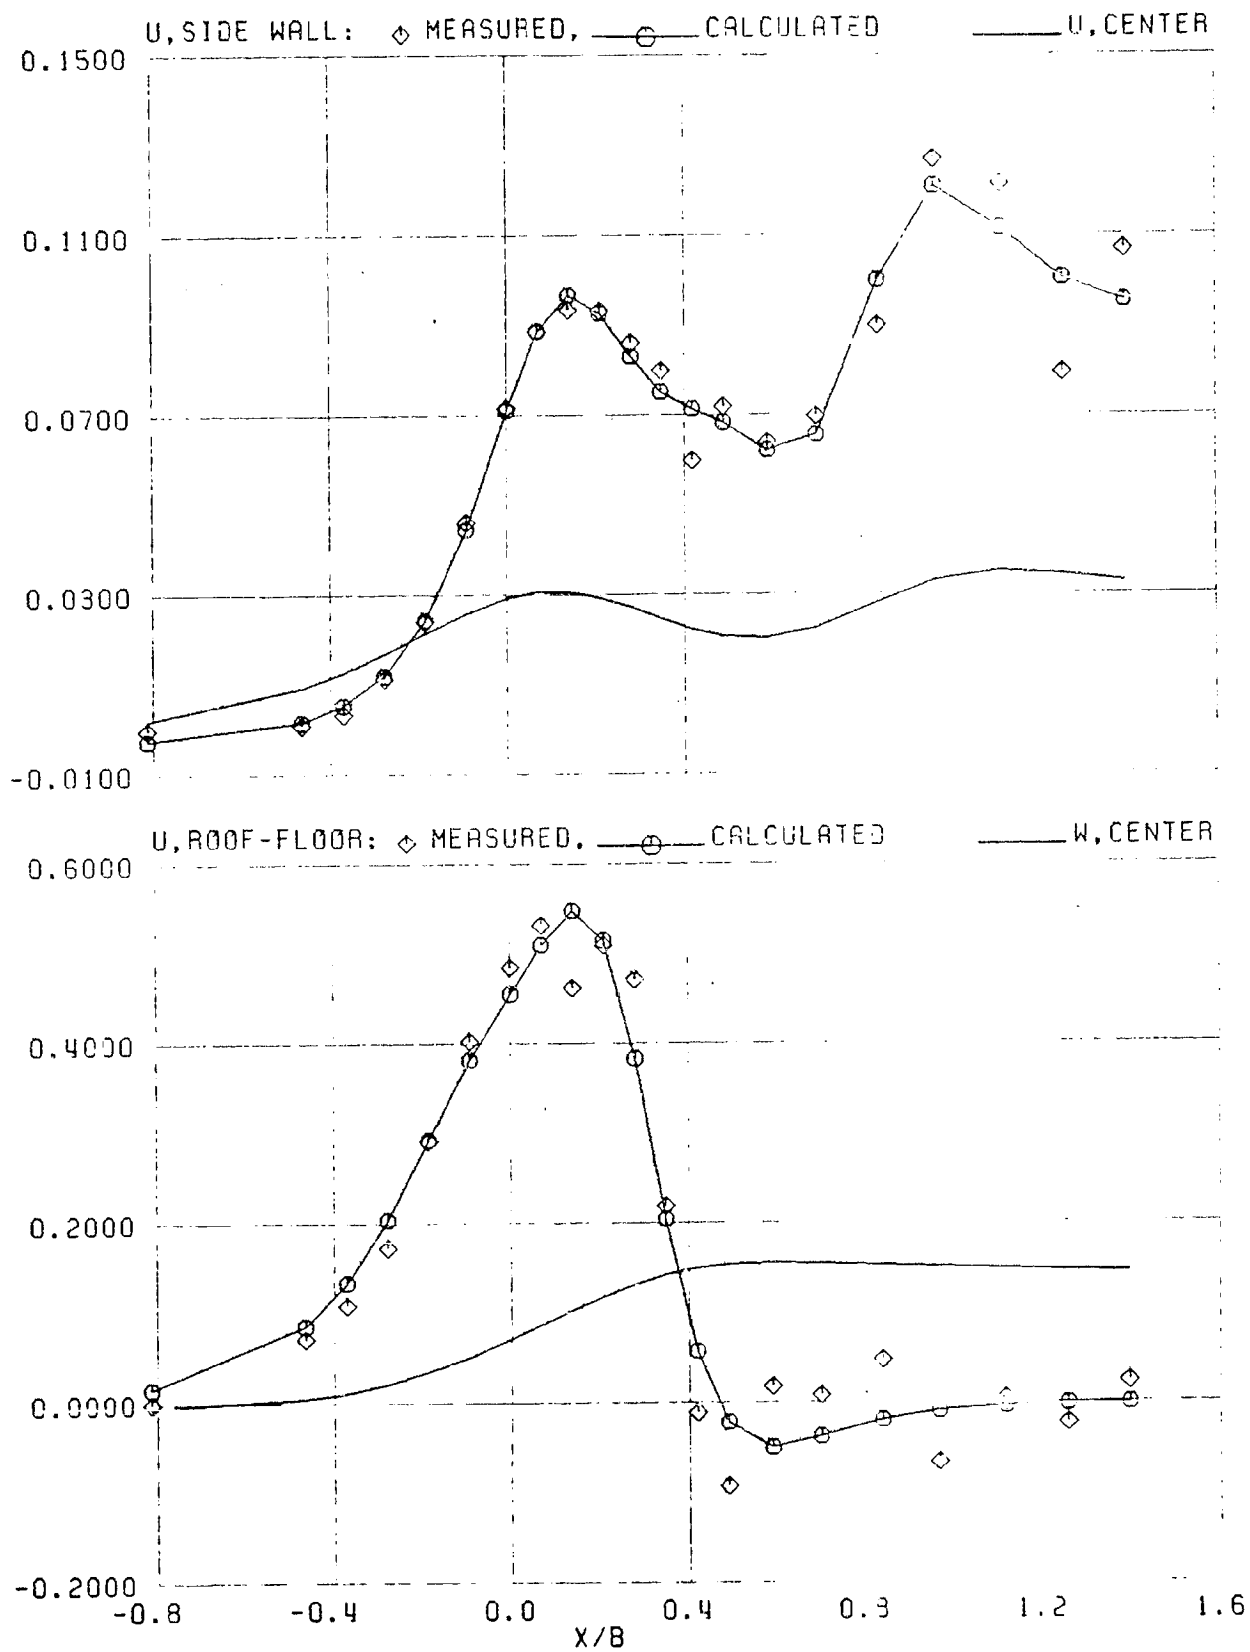

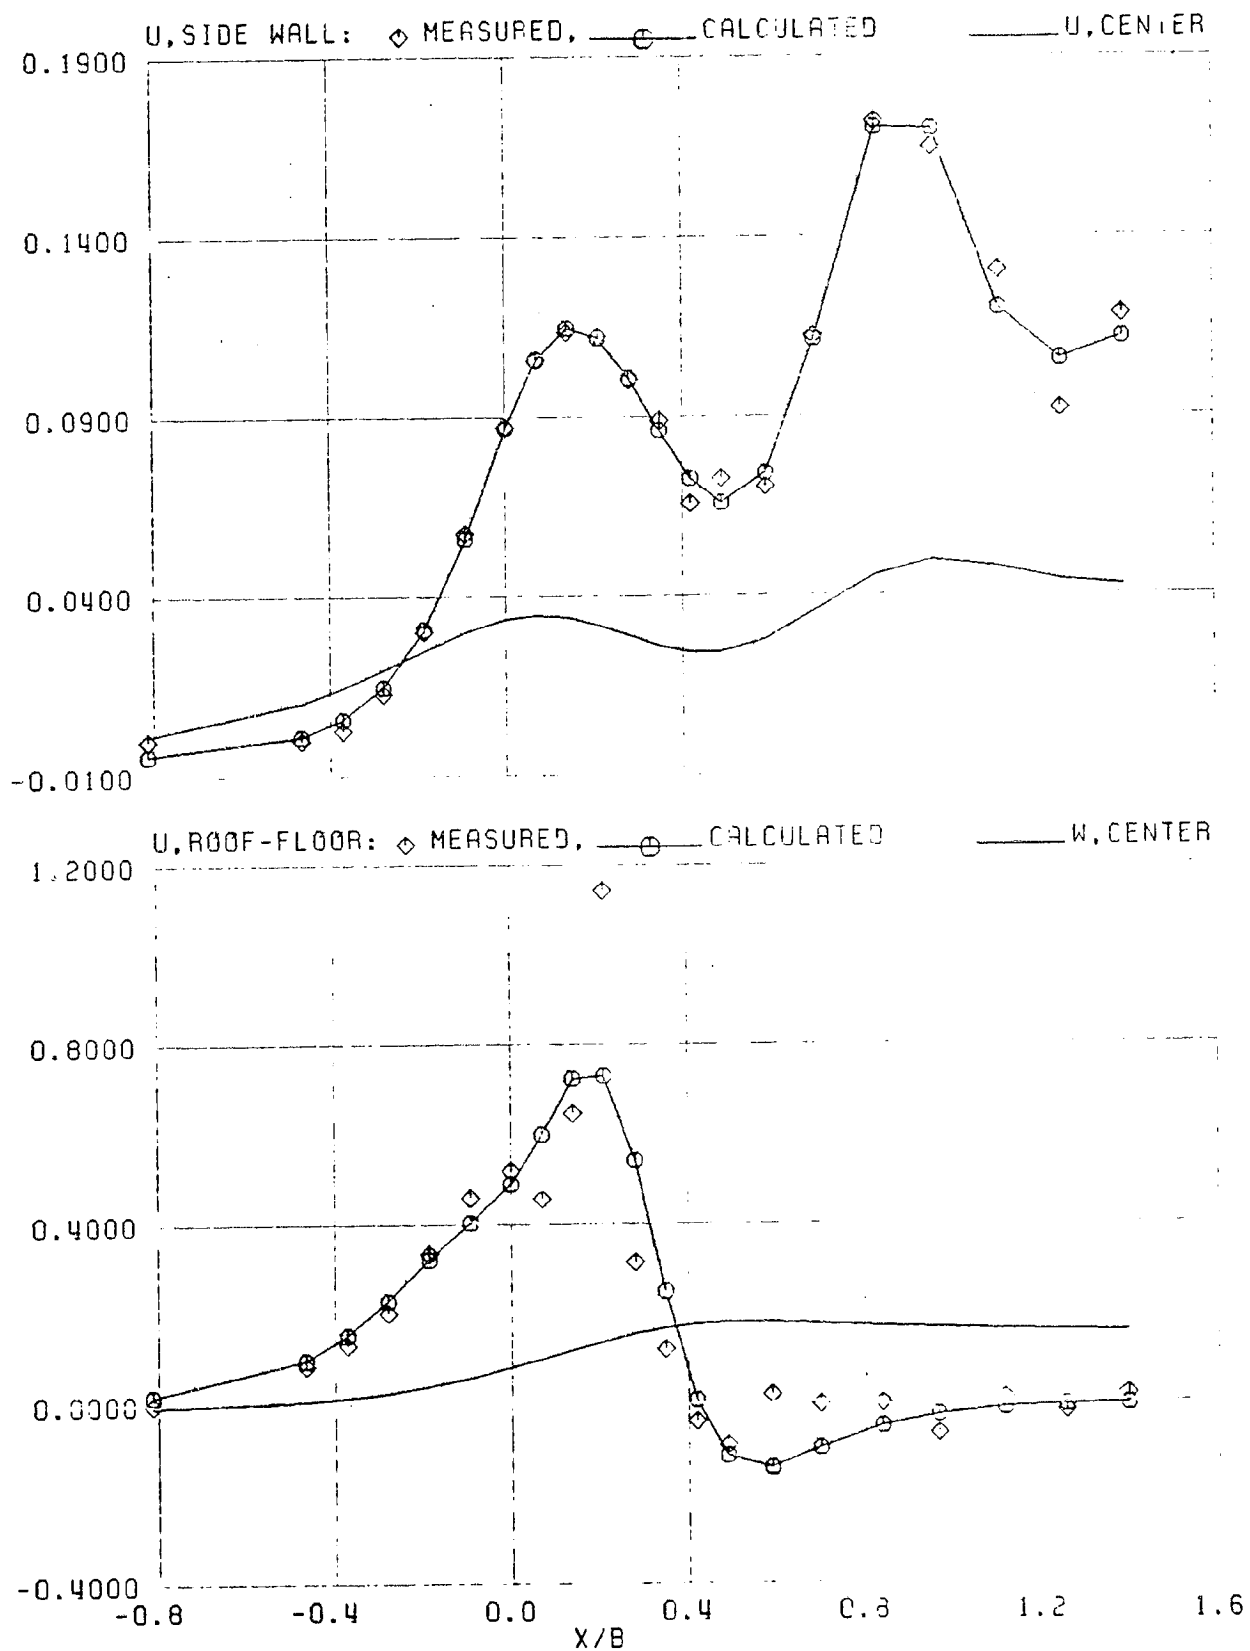

APPENDIX 4

LEAST SQUARES APPROACH FOR THE NASA 40' X 80' TUNNEL

APPENDIX 4

LEAST SQUARES APPROACH FOR THE NASA 40' X 80' TUNNEL

The image method employed by the LSQITER program cannot be applied directly to the NASA 80' x 40' tunnel because of its non-rectangular cross section. The influence coefficients required in the LSQITER program have to be generated using an alternate approach. This Appendix presents the results for interference factors for the 40' x 80' tunnel and explains how these are used to construct the influence coefficient matrices required by the LSQITER program.

Influence factors due to an isolated singularity

The influence factors due to a single horse shoe vortex or a finite length line source are obtained by using the vortex panel method described in Ref. 9. Figure A4.1 shows the theoretical flow model used to generate these factors. A length of 288' of the tunnel is panelled with vortex lattices. Velocities due to a centrally located singularity are calculated at these panels. Panel circulation strengths are then obtained which satisfy the zero normal velocity condition at the tunnel surface.

Tunnel wall super velocities are then computed as the sum of panel-induced and singularity-induced effects. These calculations are done at various values of x/B at the roof, floor and the sidewall locations indicated in figure A4.1. The center-line influence factors are computed by omitting the effects of the central singularity and including only the panel circulation effects. The supervelocities thus computed are normalized by the factor Q/C for cases involving sources and by the factor $2\Gamma b/C$ for cases involving horse-shoe vortices, where C is the tunnel cross section area and b is the singularity span. The results for sources and horse shoe vortices of different spans and for both horizontal and vertical orientations are presented in Tables A4.1 through A4.6.

Generation of influence coefficient matrices

Using the normalized influence factors presented in the tables, influence coefficient matrices are constructed. The elements of these matrices are of the form a_{ij} where a is the induced velocity due to j -th singularity (of unit strength) at i -th point. Thus the influence factors given in the table must be multiplied by $1/C$ for sources and by $2b/C$ for vortices for ongoing use.

The independent variable, x/B , presented in the tables corresponds to stream-wise locations on a local coordinate system whose origin is at the singularity. Once the pressure ports locations are chosen and the positions of singularities at the tunnel centerline have been selected, the relative streamwise distance between a given singularity (j) and the pressure measurement point (i) is known. This relative distance normalized by the tunnel breadth, B , is used as the independent variable to pick values from the tables. It may be necessary to interpolate the tabulated values.

The LSQITER program has been written to handle the most general cases involving singularities that could be swept, pitched and be located off-center in the tunnel. However, due to restrictions on time and effort the influence factors for the 40' x 80' tunnel have been generated only for cases where the singularities are unswept and are placed midway between roof and floor. Consequently, many of the influence coefficient matrices required by the LSQITER program become null matrices. The following list defines the matrices required.

| | | |
|-------|---------------------------------------|----------|
| UGRF: | u due to Γ , (Roof-floor) | Non-zero |
| UGWL: | u due to Γ , (Sidewall | Zero |
| WGWL: | w due to Γ , Sidewall | Zero |
| UQWL: | u due to Q , Sidewall | Non-zero |
| UQRF: | u due to Q , Roof-floor | Zero |
| UQCL: | u due to Q , Tunnel Centerline | Non-zero |
| WQCL: | w due to Q , Tunnel Centerline | Zero |
| UGCL: | u due to Γ , Tunnel Centerline | Zero |
| WGCL: | w due to Γ , Tunnel Centerline | Non-zero |

Note, however, that the null matrices must be made available to the LSQITER program with all elements set to zero

Data file structure for the influence coefficient matrices

The influence coefficient matrices generated for special cases like the 40' x 80' tunnel must be made available to the LSQITER program via FORTRAN input UNIT NO. 16. The structure of this data file is as follows:

The first few lines of data correspond to what was described as "Geometry Input" in the input description of the program given in detail on pages 103 through 105. Input line numbers 4 through 9 must be defined in this data file accordingly. The FORMAT s for the variables are I6I5 for integers and 5E16.8 for real numbers (see also subroutine TAPEIO in program listing, page 132). Note that the variable "LAYERS" loses its significance and that there can be no sweep or pitching of the singularities. Following these lines of input, the data file must now contain the elements of the matrices listed above in the same order. The elements (a_{ij}) of each matrix must be sequenced such that the subscript i varies more rapidly than the subscript j . (See program listing on page 132).

Running the LSQITER program for the 40' x 80' tunnel

Once the data file containing the influence coefficient matrices is constructed as described above, the LSQITER program can be run to process the 40' x 80' tunnel signatures. The input on UNIT 5 is identical to the rectangular tunnel case input described in pp. 101-106 with the following exceptions:

1. The program must be signalled to expect the special influence coefficient matrices. This is done by assigning a value of 3 to the flag MATSAV in input card number 2 described on page 101. This causes the program to read these matrices from FORTRAN UNIT 16 instead of calculating them through imaging techniques.
2. At present the flags KROSG and KROSQ in Card-2 must be set to zero since influence coefficients for cross effect terms are not available.

3. Omit the Geometry Input Section (Card-4 through Card-9) as these will now be read from the matrix data file via UNIT 16.

In addition to the mass storage files described on pages 106 and 107, the matrix data file described in this appendix must be pre-assigned to FORTRAN UNIT 16. For a given geometry of singularities and wall pressure points, the least square inversion process needs to be done only once. The program writes out all matrices on UNIT-8 which has to be saved for future use. Subsequent runs can be made with MATSAV=2 and the special influence coefficient matrix data file need not be made available via UNIT-16 (See comments on mass storage file, UNIT-8 on page 106).

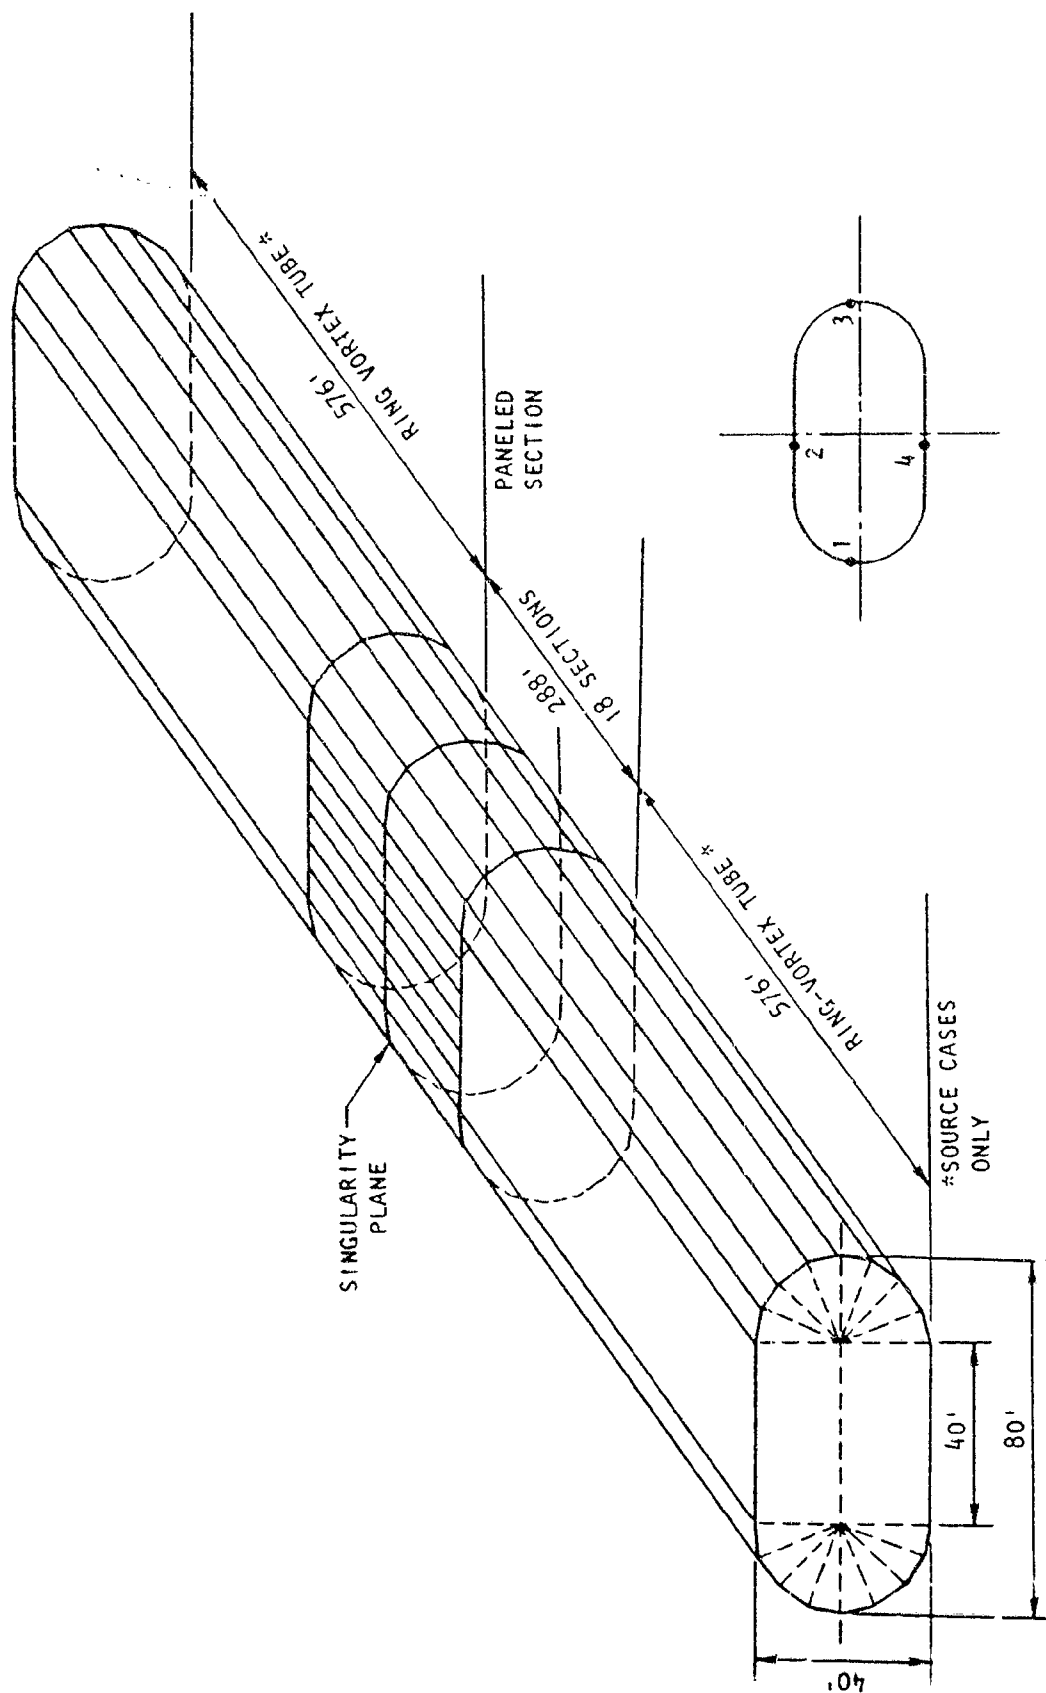


Figure A4.1 Flow model for representing the 40 x 80-foot wind tunnel.



SOURCE SPANS

| x/B | b=0.05B | b=0.10B | b=0.20B | b=0.40B | b=0.60B | b=0.70B |
|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| -1.0000 | 0.99999E+03 | 0.99999E+03 | 0.99999E+03 | 0.99999E+03 | 0.99999E+03 | 0.99999E+03 |
| -0.8000 | 0.40700E+02 | 0.40700E+02 | 0.38600E+02 | 0.32500E+02 | 0.22200E+02 | 0.17100E+02 |
| -0.6000 | 0.16230E+01 | 0.16120E+01 | 0.15200E+01 | 0.12020E+01 | 0.72200E+02 | 0.45700E+02 |
| -0.4000 | 0.60580E+01 | 0.59860E+01 | 0.56980E+01 | 0.45510E+01 | 0.27310E+01 | 0.16500E+01 |
| -0.2000 | 0.14312E+00 | 0.14677E+00 | 0.19122E+00 | 0.16536E+00 | 0.11470E+00 | 0.74100E+01 |
| 0.0000 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 |
| 0.2000 | 0.80100E+00 | 0.80323E+00 | 0.80678E+00 | 0.83364E+00 | 0.86530E+00 | 0.92590E+00 |
| 0.4000 | 0.93942E+00 | 0.94014E+00 | 0.94302E+00 | 0.95439E+00 | 0.97269E+00 | 0.98350E+00 |
| 0.6000 | 0.98377E+00 | 0.98384E+00 | 0.98489E+00 | 0.98798E+00 | 0.99278E+00 | 0.99543E+00 |
| 0.8000 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 |
| 1.0000 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 | 0.99999E+00 |

Table shows $\Delta u/U_\infty$ at sidewall for $Q/(U_\infty C) = 1.0$


TABLE A4/1A Tunnel-sidewall influence coefficients for horizontal line sources in the 40' x 80' tunnel.

SOURCE SPANS

| x/B | b=0.058 | b=0.108 | b=0.208 | b=0.408 | b=0.608 | b=0.708 |
|---------|------------|------------|------------|------------|------------|------------|
| -1.0000 | 0.2834E+01 | 0.2491E+01 | 0.2800E+01 | 0.2631E+01 | 0.2761E+01 | 0.2747E+01 |
| -0.9000 | 0.3290E+01 | 0.3292E+01 | 0.3280E+01 | 0.3225E+01 | 0.3143E+01 | 0.3119E+01 |
| -0.8000 | 0.3603E+01 | 0.3879E+01 | 0.3865E+01 | 0.3806E+01 | 0.3712E+01 | 0.3679E+01 |
| -0.7000 | 0.5052E+01 | 0.5054E+01 | 0.5042E+01 | 0.4904E+01 | 0.4884E+01 | 0.4842E+01 |
| -0.6000 | 0.6027E+01 | 0.6627E+01 | 0.6018E+01 | 0.6574E+01 | 0.6481E+01 | 0.6438E+01 |
| -0.5000 | 0.9107E+01 | 0.9167E+01 | 0.9170E+01 | 0.9158E+01 | 0.9099E+01 | 0.9064E+01 |
| -0.4000 | 0.1274E+02 | 0.1274E+02 | 0.1276E+02 | 0.1281E+02 | 0.1282E+02 | 0.1280E+02 |
| -0.3000 | 0.1329E+02 | 0.1830E+02 | 0.1834E+02 | 0.1846E+02 | 0.1855E+02 | 0.1858E+02 |
| -0.2000 | 0.2019E+02 | 0.2620E+02 | 0.2626E+02 | 0.2642E+02 | 0.2658E+02 | 0.2664E+02 |
| -0.1000 | 0.3729E+02 | 0.3730E+02 | 0.3734E+02 | 0.3744E+02 | 0.3754E+02 | 0.3758E+02 |
| 0.0000 | 0.5000E+02 | 0.5000E+02 | 0.5000E+02 | 0.5000E+02 | 0.5000E+02 | 0.5000E+02 |
| 0.1000 | 0.6270E+02 | 0.6269E+02 | 0.6265E+02 | 0.6255E+02 | 0.6245E+02 | 0.6241E+02 |
| 0.2000 | 0.7380E+02 | 0.7379E+02 | 0.7373E+02 | 0.7357E+02 | 0.7341E+02 | 0.7336E+02 |
| 0.3000 | 0.8170E+02 | 0.8169E+02 | 0.8165E+02 | 0.8153E+02 | 0.8144E+02 | 0.8141E+02 |
| 0.4000 | 0.8725E+02 | 0.8725E+02 | 0.8723E+02 | 0.8718E+02 | 0.8718E+02 | 0.8719E+02 |
| 0.5000 | 0.9033E+02 | 0.9063E+02 | 0.9063E+02 | 0.9084E+02 | 0.9090E+02 | 0.9093E+02 |
| 0.6000 | 0.9337E+02 | 0.9337E+02 | 0.9338E+02 | 0.9342E+02 | 0.9351E+02 | 0.9356E+02 |
| 0.7000 | 0.9434E+02 | 0.9494E+02 | 0.9495E+02 | 0.9501E+02 | 0.9511E+02 | 0.9515E+02 |
| 0.8000 | 0.9611E+02 | 0.9612E+02 | 0.9613E+02 | 0.9619E+02 | 0.9626E+02 | 0.9632E+02 |
| 0.9000 | 0.9703E+02 | 0.9670E+02 | 0.9672E+02 | 0.9677E+02 | 0.9685E+02 | 0.9688E+02 |
| 1.0000 | 0.9703E+02 | 0.9710E+02 | 0.9712E+02 | 0.9716E+02 | 0.9723E+02 | 0.9725E+02 |

Table shows Interference $\Delta u/U_\infty$, at model centerline,
for $Q/(U_\infty C) = 1.0$

TABLE A4/1B Model-center Interference coefficients for horizontal line
sources in the 40' x 80' tunnel.



BOUND VORTEX SPANS

| x/B | b=0.058 | b=0.108 | b=0.208 | b=0.408 | b=0.608 | L=0.708 |
|---------|--------------|--------------|--------------|--------------|--------------|--------------|
| -1.0000 | -0.13000E-03 | -0.13000E-03 | -0.13000E-03 | -0.12499E-03 | -0.79989E-04 | -0.59992E-04 |
| -0.8000 | 0.21500E-02 | 0.21450E-02 | 0.21200E-02 | 0.20500E-02 | 0.19950E-02 | 0.19550E-02 |
| -0.6000 | 0.11850E-01 | 0.11810E-01 | 0.11650E-01 | 0.11100E-01 | 0.10400E-01 | 0.10010E-01 |
| -0.4000 | 0.53430E-01 | 0.53045E-01 | 0.51930E-01 | 0.48135E-01 | 0.43415E-01 | 0.41010E-01 |
| -0.2000 | 0.22515E+00 | 0.22297E+00 | 0.21475E+00 | 0.18880E+00 | 0.16059E+00 | 0.14785E+00 |
| 0.0000 | 0.49003E+00 | 0.48946E+00 | 0.46523E+00 | 0.39300E+00 | 0.32164E+00 | 0.29162E+00 |
| 0.2000 | 0.22515E+00 | 0.22297E+00 | 0.21475E+00 | 0.18880E+00 | 0.16059E+00 | 0.14785E+00 |
| 0.4000 | 0.53430E-01 | 0.53045E-01 | 0.51930E-01 | 0.48135E-01 | 0.43415E-01 | 0.41010E-01 |
| 0.6000 | 0.11850E-01 | 0.11810E-01 | 0.11650E-01 | 0.11100E-01 | 0.10400E-01 | 0.10010E-01 |
| 0.8000 | 0.21500E-02 | 0.21450E-02 | 0.21200E-02 | 0.20500E-02 | 0.19950E-02 | 0.19550E-02 |
| 1.0000 | -0.13000E-03 | -0.13000E-03 | -0.13000E-03 | -0.12499E-03 | -0.79989E-04 | -0.59992E-04 |

Table shows $\Delta u/U_\infty$ at roof for $\Gamma/(U_\infty c/b) = 0.50$
(Floor values have opposite signs)


TABLE A4/2A Tunnel roof influence coefficients for horizontal horseshoe vortices in the 40' x 80' tunnel.

BOUND VORTEX SPANS

| x/8 | b=0.05B | b=0.10B | b=0.20B | b=0.40B | b=0.60B | b=0.70B |
|---------|--------------|--------------|--------------|--------------|--------------|--------------|
| -1.0000 | -0.80465E-02 | -0.80435E-02 | -0.80330E-02 | -0.79900E-02 | -0.79205E-02 | -0.78775E-02 |
| -0.9000 | -0.93465E-02 | -0.93430E-02 | -0.93300E-02 | -0.92770E-02 | -0.91915E-02 | -0.91380E-02 |
| -0.8000 | -0.10708E-01 | -0.10704E-01 | -0.10690E-01 | -0.10630E-01 | -0.10531E-01 | -0.10470E-01 |
| -0.7000 | -0.11900E-01 | -0.11897E-01 | -0.11884E-01 | -0.11830E-01 | -0.11734E-01 | -0.11674E-01 |
| -0.6000 | -0.12322E-01 | -0.12322E-01 | -0.12323E-01 | -0.12315E-01 | -0.12276E-01 | -0.12246E-01 |
| -0.5000 | -0.10861E-01 | -0.10873E-01 | -0.10918E-01 | -0.11062E-01 | -0.11214E-01 | -0.11286E-01 |
| -0.4000 | -0.51910E-02 | -0.52345E-02 | -0.54015E-02 | -0.59635E-02 | -0.66390E-02 | -0.69805E-02 |
| -0.3000 | 0.79705E-02 | 0.78525E-02 | 0.73990E-02 | 0.58615E-02 | 0.39880E-02 | 0.30470E-02 |
| -0.2000 | 0.33521E-01 | 0.33247E-01 | 0.32197E-01 | 0.28640E-01 | 0.24334E-01 | 0.22207E-01 |
| -0.1000 | 0.72295E-01 | 0.71769E-01 | 0.69755E-01 | 0.62960E-01 | 0.54819E-01 | 0.50858E-01 |
| 0.0000 | 0.12410E+00 | 0.12321E+00 | 0.11981E+00 | 0.10838E+00 | 0.94844E-01 | 0.88347E-01 |
| 0.1000 | 0.17592E+00 | 0.17466E+00 | 0.16986E+00 | 0.15380E+00 | 0.13487E+00 | 0.12584E+00 |
| 0.2000 | 0.21469E+00 | 0.21318E+00 | 0.20741E+00 | 0.18811E+00 | 0.16535E+00 | 0.15449E+00 |
| 0.3000 | 0.24024E+00 | 0.23857E+00 | 0.23221E+00 | 0.21089E+00 | 0.18570E+00 | 0.17365E+00 |
| 0.4000 | 0.25339E+00 | 0.25165E+00 | 0.24501E+00 | 0.22271E+00 | 0.19632E+00 | 0.18367E+00 |
| 0.5000 | 0.25906E+00 | 0.25729E+00 | 0.25052E+00 | 0.22781E+00 | 0.20089E+00 | 0.18797E+00 |
| 0.6000 | 0.26049E+00 | 0.25871E+00 | 0.25190E+00 | 0.22903E+00 | 0.20193E+00 | 0.18890E+00 |
| 0.7000 | 0.26003E+00 | 0.25825E+00 | 0.25142E+00 | 0.22851E+00 | 0.20135E+00 | 0.18829E+00 |
| 0.8000 | 0.25874E+00 | 0.25695E+00 | 0.25012E+00 | 0.22721E+00 | 0.20004E+00 | 0.18699E+00 |
| 0.9000 | 0.25719E+00 | 0.25541E+00 | 0.24858E+00 | 0.22568E+00 | 0.19853E+00 | 0.18548E+00 |
| 1.0000 | 0.25550E+00 | 0.25371E+00 | 0.24689E+00 | 0.22400E+00 | 0.19687E+00 | 0.18384E+00 |

Table shows interference $\Delta w/U_\infty$, at model centerline, for $\Gamma/(U_\infty c/b) = 0.50$
(Values are the same as conventionally-defined δ)

TABLE A4/2B Model-center interference coefficients for horizontal horse-shoe vortices in 40' x 80' tunnel.



SOURCE SPANS

| x/B | b = 0.05H | b = 0.10H | b = 0.20H | b = 0.40H | b = 0.60H | b = 0.70H |
|---------|--------------|--------------|--------------|--------------|--------------|--------------|
| -1.0000 | 0.99999E-03 | 0.99999E-03 | 0.99999E-03 | 0.99999E-03 | 0.99999E-03 | 0.99999E-03 |
| -0.8000 | -0.15000E-02 | -0.15000E-02 | -0.16000E-02 | -0.17000E-02 | -0.16000E-02 | -0.15000E-02 |
| -0.6000 | -0.11200E-01 | -0.11100E-01 | -0.11200E-01 | -0.11300E-01 | -0.11300E-01 | -0.11000E-01 |
| -0.4000 | -0.42900E-01 | -0.43100E-01 | -0.43700E-01 | -0.45900E-01 | -0.48400E-01 | -0.49000E-01 |
| -0.2000 | -0.72500E-01 | -0.74300E-01 | -0.81700E-01 | -0.11140E+00 | -0.15730E+00 | -0.18180E+00 |
| 0.0000 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 |
| 0.2000 | 0.10725E+01 | 0.10743E+01 | 0.10817E+01 | 0.11114E+01 | 0.11573E+01 | 0.11818E+01 |
| 0.4000 | 0.10429E+01 | 0.10431E+01 | 0.10437E+01 | 0.10459E+01 | 0.10484E+01 | 0.10490E+01 |
| 0.6000 | 0.10112E+01 | 0.10111E+01 | 0.10112E+01 | 0.10113E+01 | 0.10113E+01 | 0.10110E+01 |
| 0.8000 | 0.10016E+01 | 0.10015E+01 | 0.10016E+01 | 0.10017E+01 | 0.10016E+01 | 0.10015E+01 |
| 1.0000 | 0.99900E+00 | 0.99900E+00 | 0.99900E+00 | 0.99900E+00 | 0.99900E+00 | 0.99900E+00 |

Table shows $\Delta u/U_\infty$ at "sidewall" for $Q/(U_\infty C) = 1.0$

TABLE A4/3A Tunnel roof influence coefficients for vertical line sources
in the 40' x 80' tunnel.

| x/B | b = 0.05H | b = 0.10H | b = 0.20H | b = 0.40H | b = 0.60H | b = 0.70H |
|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| -1.0000 | 0.28980E+01 | 0.28977E+01 | 0.24054E+01 | 0.29523E+01 | 0.31210E+01 | 0.33294E+01 |
| -0.9000 | 0.32972E+01 | 0.32984E+01 | 0.34040E+01 | 0.33445E+01 | 0.35030E+01 | 0.37055E+01 |
| -0.8000 | 0.38841E+01 | 0.38840E+01 | 0.38874E+01 | 0.39164E+01 | 0.40586E+01 | 0.42527E+01 |
| -0.7000 | 0.50579E+01 | 0.50575E+01 | 0.50552E+01 | 0.50642E+01 | 0.51772E+01 | 0.53572E+01 |
| -0.6000 | 0.66277E+01 | 0.66252E+01 | 0.66135E+01 | 0.65444E+01 | 0.66519E+01 | 0.68034E+01 |
| -0.5000 | 0.91640E+01 | 0.91570E+01 | 0.91315E+01 | 0.90475E+01 | 0.90200E+01 | 0.91225E+01 |
| -0.4000 | 1.12755E+00 | 0.12723E+00 | 0.12673E+00 | 0.12447E+00 | 0.12328E+00 | 0.12348E+00 |
| -0.3000 | 1.18282E+00 | 0.18262E+00 | 0.18185E+00 | 0.17496E+00 | 0.17540E+00 | 0.17448E+00 |
| -0.2000 | 1.26162E+00 | 0.26160E+00 | 0.26073E+00 | 0.25138E+00 | 0.25241E+00 | 0.25128E+00 |
| -0.1000 | 1.37292E+00 | 0.37274E+00 | 0.37222E+00 | 0.37010E+00 | 0.36722E+00 | 0.36608E+00 |
| 0.0000 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 |
| 0.1000 | 0.62768E+00 | 0.62722E+00 | 0.62778E+00 | 0.62490E+00 | 0.63278E+00 | 0.63393E+00 |
| 0.2000 | 0.73110E+00 | 0.73840E+00 | 0.73927E+00 | 0.74262E+00 | 0.74709E+00 | 0.74872E+00 |
| 0.3000 | 0.81710E+00 | 0.81738E+00 | 0.81815E+00 | 0.82104E+00 | 0.82480E+00 | 0.82552E+00 |
| 0.4000 | 0.88705E+00 | 0.87748E+00 | 0.87327E+00 | 0.87503E+00 | 0.87672E+00 | 0.87652E+00 |
| 0.5000 | 0.94337E+00 | 0.90843E+00 | 0.90869E+00 | 0.90154E+00 | 0.90980E+00 | 0.90878E+00 |
| 0.6000 | 0.93370E+00 | 0.93375E+00 | 0.93367E+00 | 0.93411E+00 | 0.93348E+00 | 0.93197E+00 |
| 0.7000 | 0.94944E+00 | 0.94942E+00 | 0.94945E+00 | 0.94436E+00 | 0.94823E+00 | 0.94643E+00 |
| 0.8000 | 0.96119E+00 | 0.96115E+00 | 0.96113E+00 | 0.96084E+00 | 0.95941E+00 | 0.95747E+00 |
| 0.9000 | 0.96703E+00 | 0.96701E+00 | 0.96695E+00 | 0.96658E+00 | 0.96497E+00 | 0.96295E+00 |
| 1.0000 | 0.97104E+00 | 0.97102E+00 | 0.97095E+00 | 0.97048E+00 | 0.96879E+00 | 0.96671E+00 |

Table shows Interference $\Delta u/u_\infty$, at model centerline, for $Q/(U_\infty C) = 1.0$

TABLE A4/38 Model-center interference coefficients for vertical line sources in the 40' x 80' tunnel.

ORIGINAL PAGE IS
OF POOR QUALITY



BOUND VORTEX SPANS

| x/B | b = 0.05H | b = 0.10H | b = 0.20H | b = 0.40H | b = 0.60H | b = 0.70H |
|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| -1.0000 | 0.15050E+01 | 0.15050E+01 | 0.15040E+01 | 0.15005E+01 | 0.14960E+01 | 0.14950E+01 |
| -0.8000 | 0.30675E+01 | 0.30675E+01 | 0.30660E+01 | 0.30800E+01 | 0.30715E+01 | 0.30700E+01 |
| -0.6000 | 0.62030E+01 | 0.62025E+01 | 0.61990E+01 | 0.61860E+01 | 0.61685E+01 | 0.61650E+01 |
| -0.4000 | 0.11919E+00 | 0.11917E+00 | 0.11908E+00 | 0.11878E+00 | 0.11836E+00 | 0.11824E+00 |
| -0.2000 | 0.20101E+00 | 0.20096E+00 | 0.20076E+00 | 0.20004E+00 | 0.19905E+00 | 0.19871E+00 |
| 0.0000 | 0.24906E+00 | 0.24900E+00 | 0.24871E+00 | 0.24767E+00 | 0.24629E+00 | 0.24582E+00 |
| 0.2000 | 0.20101E+00 | 0.20096E+00 | 0.20076E+00 | 0.20004E+00 | 0.19905E+00 | 0.19871E+00 |
| 0.4000 | 0.11919E+00 | 0.11917E+00 | 0.11908E+00 | 0.11878E+00 | 0.11836E+00 | 0.11824E+00 |
| 0.6000 | 0.62030E+01 | 0.62025E+01 | 0.61990E+01 | 0.61860E+01 | 0.61685E+01 | 0.61650E+01 |
| 0.8000 | 0.30675E+01 | 0.30675E+01 | 0.30860E+01 | 0.30800E+01 | 0.30715E+01 | 0.30700E+01 |
| 1.0000 | 0.15050E+01 | 0.15050E+01 | 0.15040E+01 | 0.15005E+01 | 0.14960E+01 | 0.14950E+01 |

Table shows $\Delta u/U_\infty$ at "roof" for $\Gamma/(U_\infty C/b) = 0.50$
(Floor values have opposite signs)

TABLE A4/4A Tunnel sidewall influence coefficients for vertical horseshoe vortices in the 40' x 80' tunnel.

BOUND VORTEX SPANS

| x/B | $b=0.05H$ | $b=0.10H$ | $b=0.20H$ | $b=0.40H$ | $b=0.60H$ | $b=0.70H$ |
|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| -1.0000 | 0.59175E+02 | 0.59175E+02 | 0.59160E+02 | 0.59110E+02 | 0.59080E+02 | 0.59200E+02 |
| -0.9000 | 0.10079E-01 | 0.10079E-01 | 0.10078E-01 | 0.10072E-01 | 0.10071E-01 | 0.10089E-01 |
| -0.8000 | 0.16100E-01 | 0.16100E-01 | 0.16099E-01 | 0.16096E-01 | 0.16100E-01 | 0.16131E-01 |
| -0.7000 | 0.24666E-01 | 0.24666E-01 | 0.24668E-01 | 0.24674E-01 | 0.24699E-01 | 0.24753E-01 |
| -0.6000 | 0.36706E-01 | 0.36708E-01 | 0.36716E-01 | 0.36750E-01 | 0.36825E-01 | 0.36929E-01 |
| -0.5000 | 0.53307E-01 | 0.53314E-01 | 0.53340E-01 | 0.53446E-01 | 0.53646E-01 | 0.53852E-01 |
| -0.4000 | 0.75781E-01 | 0.75799E-01 | 0.75868E-01 | 0.76145E-01 | 0.76639E-01 | 0.77068E-01 |
| -0.3000 | 0.10526E+00 | 0.10531E+00 | 0.10547E+00 | 0.10613E+00 | 0.10728E+00 | 0.10819E+00 |
| -0.2000 | 0.14250E+00 | 0.14259E+00 | 0.14293E+00 | 0.14435E+00 | 0.14684E+00 | 0.14876E+00 |
| -0.1000 | 0.18657E+00 | 0.18673E+00 | 0.18739E+00 | 0.19009E+00 | 0.19499E+00 | 0.19880E+00 |
| 0.0000 | 0.23521E+00 | 0.23548E+00 | 0.23657E+00 | 0.24110E+00 | 0.24960E+00 | 0.25632E+00 |
| 0.1000 | 0.28378E+00 | 0.28415E+00 | 0.28567E+00 | 0.29204E+00 | 0.30412E+00 | 0.31376E+00 |
| 0.2000 | 0.32760E+00 | 0.32805E+00 | 0.32988E+00 | 0.33753E+00 | 0.35202E+00 | 0.36355E+00 |
| 0.3000 | 0.36440E+00 | 0.36490E+00 | 0.36690E+00 | 0.37531E+00 | 0.39114E+00 | 0.40367E+00 |
| 0.4000 | 0.39319E+00 | 0.39371E+00 | 0.39581E+00 | 0.40459E+00 | 0.42107E+00 | 0.43407E+00 |
| 0.5000 | 0.41465E+00 | 0.41518E+00 | 0.41732E+00 | 0.42626E+00 | 0.44302E+00 | 0.45623E+00 |
| 0.6000 | 0.42976E+00 | 0.43029E+00 | 0.43245E+00 | 0.44146E+00 | 0.45832E+00 | 0.47162E+00 |
| 0.7000 | 0.43967E+00 | 0.44020E+00 | 0.44236E+00 | 0.45138E+00 | 0.46826E+00 | 0.48158E+00 |
| 0.8000 | 0.44518E+00 | 0.44572E+00 | 0.44787E+00 | 0.45688E+00 | 0.47373E+00 | 0.48704E+00 |
| 0.9000 | 0.44686E+00 | 0.44740E+00 | 0.44954E+00 | 0.45851E+00 | 0.47531E+00 | 0.48858E+00 |
| 1.0000 | 0.44485E+00 | 0.44537E+00 | 0.44751E+00 | 0.45664E+00 | 0.47313E+00 | 0.48634E+00 |

Table shows interference $\Delta w/U_\infty$ at model centerline, for $\Gamma/(U_\infty C/b) = 0.50$
(Values are the same as conventionally-defined δ)

TABLE A4/4B Model-center interference coefficients for vertical horseshoe
vortices in the 40' x 80' tunnel.



SOURCE SPANS

| x/B | b=0.05H | b=0.10H | b=0.20H | b=0.40H | b=0.60H | b=0.70H |
|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| -1.0000 | 0.19136E-03 | 0.19136E-03 | 0.19181E-03 | 0.19211E-03 | 0.19211E-03 | 0.23898E-03 |
| -0.8000 | 0.77981E-02 | 0.77057E-02 | 0.74677E-02 | 0.65588E-02 | 0.53260E-02 | 0.46591E-02 |
| -0.6000 | 0.21351E-01 | 0.21068E-01 | 0.19920E-01 | 0.15639E-01 | 0.93170E-02 | 0.58498E-02 |
| -0.4000 | 0.03769E-01 | 0.02770E-01 | 0.58860E-01 | 0.43251E-01 | 0.17584E-01 | 0.20927E-02 |
| -0.2000 | 0.20200E+00 | 0.40015E+00 | 0.19234E+00 | 0.15778E+00 | 0.81982E-01 | 0.19307E-01 |
| 0.0000 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 |
| 0.2000 | 0.79800E+00 | 0.79985E+00 | 0.80746E+00 | 0.84222E+00 | 0.91802E+00 | 0.98069E+00 |
| 0.4000 | 0.93623E+00 | 0.93723E+00 | 0.94114E+00 | 0.95675E+00 | 0.98242E+00 | 0.99791E+00 |
| 0.6000 | 0.97665E+00 | 0.97893E+00 | 0.98008E+00 | 0.98436E+00 | 0.99068E+00 | 0.99415E+00 |
| 0.8000 | 0.99220E+00 | 0.99229E+00 | 0.99253E+00 | 0.99344E+00 | 0.99467E+00 | 0.99534E+00 |
| 1.0000 | 0.99981E+00 | 0.99981E+00 | 0.99981E+00 | 0.99981E+00 | 0.99981E+00 | 0.99976E+00 |

Table shows $\Delta u/U_\infty$ at sidewall for $Q/(U_\infty C) = 1.0$

TABLE A4/5A Tunnel roof influence coefficients for vertical, half-model line sources in the 40' x 80' tunnel.

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY

SOURCE SPANS

| x/B | b=0.05H | b=0.10H | b=0.20H | b=0.40H | b=0.60H | b=0.70H |
|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| -1.0000 | 0.50000E+02 | 0.50000E+02 | 0.50000E+02 | 0.50000E+02 | 0.50000E+02 | 0.50055E+02 |
| -0.9000 | 0.20189E+01 | 0.20178E-01 | 0.20112E+01 | 0.19892E-01 | 0.19510E+01 | 0.19259E+01 |
| -0.8000 | 0.39741E+01 | 0.39712E+01 | 0.39589E+01 | 0.39099E-01 | 0.38243E+01 | 0.37688E+01 |
| -0.7000 | 0.64950E+01 | 0.64940E-01 | 0.64750E+01 | 0.63958E+01 | 0.62572E+01 | 0.61647E+01 |
| -0.6000 | 0.97130E+01 | 0.97072E+01 | 0.96812E+01 | 0.95732E+01 | 0.93799E+01 | 0.92478E+01 |
| -0.5000 | 0.13796E+00 | 0.13789E+00 | 0.13758E+00 | 0.13630E+00 | 0.13389E+00 | 0.13218E+00 |
| -0.4000 | 0.18868E+00 | 0.18880E+00 | 0.18850E+00 | 0.18714E+00 | 0.18446E+00 | 0.18250E+00 |
| -0.3000 | 0.25134E+00 | 0.25127E+00 | 0.25099E+00 | 0.24977E+00 | 0.24718E+00 | 0.24521E+00 |
| -0.2000 | 0.32539E+00 | 0.32535E+00 | 0.32515E+00 | 0.32423E+00 | 0.32218E+00 | 0.32057E+00 |
| -0.1000 | 0.40822E+00 | 0.40980E+00 | 0.40970E+00 | 0.40920E+00 | 0.40805E+00 | 0.40712E+00 |
| 0.0000 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 | 0.50000E+00 |
| 0.1000 | 0.59018E+00 | 0.59020E+00 | 0.59030E+00 | 0.59080E+00 | 0.59195E+00 | 0.59288E+00 |
| 0.2000 | 0.67401E+00 | 0.67455E+00 | 0.67485E+00 | 0.67577E+00 | 0.67762E+00 | 0.67943E+00 |
| 0.3000 | 0.74866E+00 | 0.74873E+00 | 0.74901E+00 | 0.75023E+00 | 0.75282E+00 | 0.75479E+00 |
| 0.4000 | 0.81112E+00 | 0.81120E+00 | 0.81150E+00 | 0.81286E+00 | 0.81554E+00 | 0.81750E+00 |
| 0.5000 | 0.86204E+00 | 0.86211E+00 | 0.86242E+00 | 0.86370E+00 | 0.86611E+00 | 0.86782E+00 |
| 0.6000 | 0.90287E+00 | 0.90293E+00 | 0.90319E+00 | 0.90427E+00 | 0.90620E+00 | 0.90752E+00 |
| 0.7000 | 0.93502E+00 | 0.93506E+00 | 0.93525E+00 | 0.93604E+00 | 0.93743E+00 | 0.93835E+00 |
| 0.8000 | 0.96026E+00 | 0.96029E+00 | 0.96041E+00 | 0.96090E+00 | 0.96176E+00 | 0.96231E+00 |
| 0.9000 | 0.97961E+00 | 0.97982E+00 | 0.97989E+00 | 0.98011E+00 | 0.98049E+00 | 0.98074E+00 |
| 1.0000 | 0.99500E+00 | 0.99500E+00 | 0.99500E+00 | 0.99500E+00 | 0.99500E+00 | 0.99499E+00 |

Table shows interference $\Delta u/U_\infty$ at model centerline,
for $Q/(U_\infty C) = 1.0$

TABLE A4/58 Model center interference coefficients for vertical, half-model
line sources in the 40' x 80' tunnel.



BOUND VORTEX SPANS

| x/B | b=0.05H | b=0.10H | b=0.20H | b=0.40H | b=0.60H | b=0.70H |
|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| -1.0000 | 0.13165E-01 | 0.13020E-01 | 0.13165E-01 | 0.13250E-01 | 0.13260E-01 | 0.13235E-01 |
| -0.8000 | 0.24565E-01 | 0.28585E-01 | 0.28660E-01 | 0.28795E-01 | 0.28800E-01 | 0.28750E-01 |
| -0.6000 | 0.59765E-01 | 0.59600E-01 | 0.59915E-01 | 0.60100E-01 | 0.60005E-01 | 0.59845E-01 |
| -0.4000 | 0.11551E+00 | 0.11857E+00 | 0.11874E+00 | 0.11890E+00 | 0.11835E+00 | 0.11780E+00 |
| -0.2000 | 0.20439E+00 | 0.20449E+00 | 0.20480E+00 | 0.20488E+00 | 0.20323E+00 | 0.20172E+00 |
| 0.0000 | 0.25552E+00 | 0.25565E+00 | 0.25605E+00 | 0.25607E+00 | 0.25350E+00 | 0.25120E+00 |
| 0.2000 | 0.20439E+00 | 0.20449E+00 | 0.20480E+00 | 0.20488E+00 | 0.20323E+00 | 0.20172E+00 |
| 0.4000 | 0.11851E+00 | 0.11857E+00 | 0.11874E+00 | 0.11890E+00 | 0.11835E+00 | 0.11780E+00 |
| 0.6000 | 0.59765E-01 | 0.59600E-01 | 0.59915E-01 | 0.60100E-01 | 0.60005E-01 | 0.59845E-01 |
| 0.8000 | 0.24565E-01 | 0.28585E-01 | 0.28660E-01 | 0.28795E-01 | 0.28800E-01 | 0.28750E-01 |
| 1.0000 | 0.13165E-01 | 0.13120E-01 | 0.13165E-01 | 0.13250E-01 | 0.13260E-01 | 0.13235E-01 |

Table shows $\Delta u/U_\infty$ at roof for $\Gamma/(U C/b) = 0.50$
(Floor values have opposite signs)

TABLE A4/6A Tunnel sidewall influence coefficients for vertical, half-model horseshoe vortices in the 40' x 80' tunnel.

ORIGINAL PAGE IS
OF POOR QUALITY

BOUND VORTEX SPANS

| x/B | b=0.05H | b=0.10H | b=0.20H | b=0.40H | b=0.60H | b=0.70H |
|---------|--------------|--------------|--------------|--------------|--------------|--------------|
| -1.0000 | -0.34865E-02 | -0.34745E-02 | -0.34285E-02 | -0.32720E-02 | -0.30650E-02 | -0.29500E-02 |
| -0.9000 | -0.15195E-02 | -0.15015E-02 | -0.14365E-02 | -0.12190E-02 | -0.93150E-03 | -0.77200E-03 |
| -0.8000 | 0.15875E-02 | 0.16115E-02 | 0.17015E-02 | 0.20050E-02 | 0.24050E-02 | 0.26280E-02 |
| -0.7000 | 0.62490E-02 | 0.62820E-02 | 0.64070E-02 | 0.68265E-02 | 0.73810E-02 | 0.76930E-02 |
| -0.6000 | 0.13006E-01 | 0.13052E-01 | 0.13221E-01 | 0.13791E-01 | 0.14550E-01 | 0.14984E-01 |
| -0.5000 | 0.22483E-01 | 0.22543E-01 | 0.22768E-01 | 0.23519E-01 | 0.24532E-01 | 0.25124E-01 |
| -0.4000 | 0.35356E-01 | 0.35474E-01 | 0.35758E-01 | 0.36702E-01 | 0.38001E-01 | 0.38787E-01 |
| -0.3000 | 0.52368E-01 | 0.52459E-01 | 0.52795E-01 | 0.53899E-01 | 0.55469E-01 | 0.56472E-01 |
| -0.2000 | 0.73772E-01 | 0.73871E-01 | 0.74231E-01 | 0.75401E-01 | 0.77158E-01 | 0.78376E-01 |
| -0.1000 | 0.99055E-01 | 0.99152E-01 | 0.99501E-01 | 0.10061E+00 | 0.10243E+00 | 0.10384E+00 |
| 0.0000 | 0.12694E+00 | 0.12702E+00 | 0.12731E+00 | 0.12822E+00 | 0.12998E+00 | 0.13155E+00 |
| 0.1000 | 0.15475E+00 | 0.15483E+00 | 0.15503E+00 | 0.15578E+00 | 0.15747E+00 | 0.15920E+00 |
| 0.2000 | 0.17983E+00 | 0.17995E+00 | 0.18019E+00 | 0.18063E+00 | 0.18256E+00 | 0.18450E+00 |
| 0.3000 | 0.20102E+00 | 0.20110E+00 | 0.20136E+00 | 0.20205E+00 | 0.20398E+00 | 0.20611E+00 |
| 0.4000 | 0.21750E+00 | 0.21766E+00 | 0.21796E+00 | 0.21881E+00 | 0.22099E+00 | 0.22333E+00 |
| 0.5000 | 0.22984E+00 | 0.22995E+00 | 0.23031E+00 | 0.23133E+00 | 0.23378E+00 | 0.23629E+00 |
| 0.6000 | 0.23534E+00 | 0.23551E+00 | 0.23891E+00 | 0.24010E+00 | 0.24276E+00 | 0.24541E+00 |
| 0.7000 | 0.24360E+00 | 0.24393E+00 | 0.24438E+00 | 0.24568E+00 | 0.24850E+00 | 0.25124E+00 |
| 0.8000 | 0.24554E+00 | 0.24668E+00 | 0.24715E+00 | 0.24852E+00 | 0.25142E+00 | 0.25421E+00 |
| 0.9000 | 0.24697E+00 | 0.24705E+00 | 0.24753E+00 | 0.24892E+00 | 0.25164E+00 | 0.25462E+00 |
| 1.0000 | 0.24499E+00 | 0.24512E+00 | 0.24559E+00 | 0.24695E+00 | 0.24982E+00 | 0.25256E+00 |

Table shows interference $\Delta w/U_\infty$, at model centerline, for $\Gamma/(U_\infty c/b) = 0.50$
(Values are the same as conventionally-defined δ)

TABLE A4/6B Model center interference coefficients for vertical, half-model
horseshoe vortices in the 40' x 80' tunnel.